


Luminaire

Code AQ70318
Name A.24 SOSP CURVA 60 R561 SHRP FL3000K BCP

Measurement

Code FTS1902258-A
Name A.24 SOSP CURVA 60 R561 SHRP FL3000K BCP

| | | | | | | | |
|---|--------------------|-------------------------|----------------|-----------------------------|----------------|-------------------------|--------------------|
| Luminaire Flux | 814 lm | Luminaire Power | 11.0 W | Efficacy | 74.000 lm/W | Efficiency | 100.00% |
| Source Flux | 814 lm | Maximum value | 2814.46 cd/klm | Position | C=20.00 G=1.00 | CG | Double Symmetrical |
| Rectangular Luminaire | | Length | 587 mm | Width | 24 mm | Height | 55 mm |
| Rectangular Luminous Area | | Length | 129 mm | Width | 12 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.001548 m ² | | Emitting area on Plane 180° | | 0.000000 m ² | |
| Emitting area on Plane 0° | | 0.000000 m ² | | Emitting area on Plane 270° | | 0.000000 m ² | |
| Emitting area on Plane 90° | | 0.000000 m ² | | Glare area at 76° | | 0.000374 m ² | |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 01-08-2023 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 814 lm | |
| LED Flux=1000lm LED Power=10W Eff=81% EfcLed=100lm/W EfcLum=74lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=118000h | | | | | | | |
| C.I.E. | 98 100 100 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | -- | | | B NBN | BZ 1 | | |

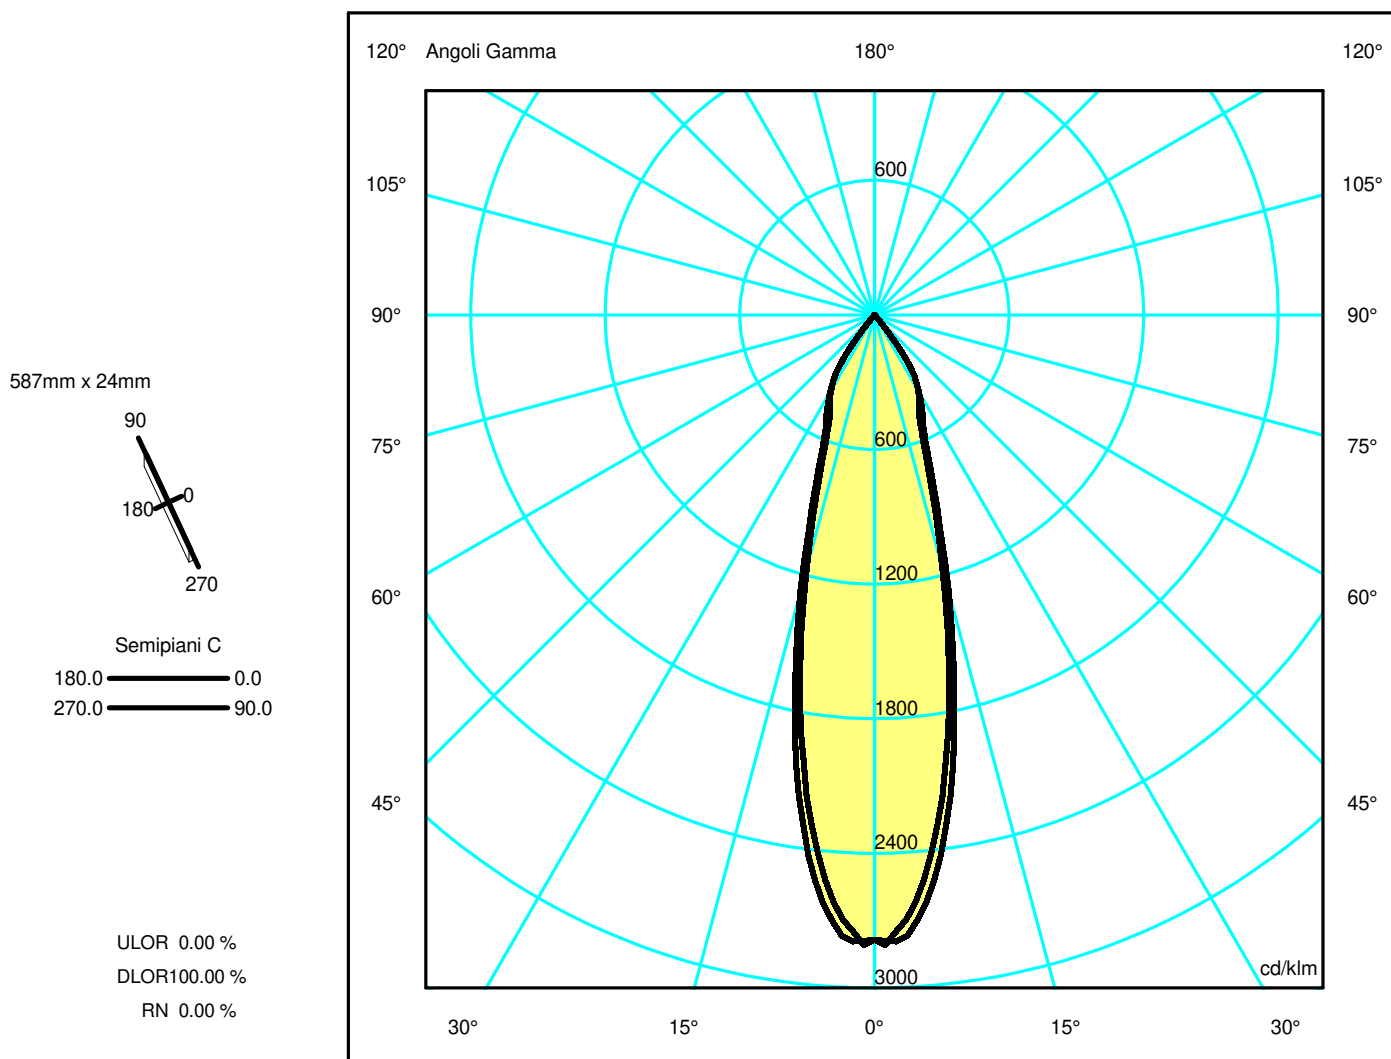

Luminaire

Code AQ70318
Name A.24 SOSP CURVA 60 R561 SHRP FL3000K BCP

Measurerm.

Code FTS1902258-A
Name A.24 SOSP CURVA 60 R561 SHRP FL3000K BCP

| | | | | | | | |
|----------------------------|--------|-----------------|----------------|-----------------------------|----------------|--------------------|--------------------|
| Luminaire Flux | 814 lm | Luminaire Power | 11.0 W | Efficacy | 74.000 lm/W | Efficiency | 100.00% |
| Source Flux | 814 lm | Maximum value | 2814.46 cd/klm | Position | C=20.00 G=1.00 | CG | Double Symmetrical |
| Rectangular Luminaire | | Length | 587 mm | Width | 24 mm | Height | 55 mm |
| Rectangular Luminous Area | | Length | 129 mm | Width | 12 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.001548 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000374 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 01-08-2023 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 814 lm | |


LED Flux=1000lm LED Power=10W Eff=81% EfcLed=100lm/W EfcLum=74lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=118000h

| | | | |
|--------|--------------------|------------|------|
| C.I.E. | 98 100 100 100 100 | D DIN 5040 | A60 |
| F UTE | -- | B NBN | BZ 1 |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 0.24 | 0.47 | 0.71 | 0.95 | 1.18 | OC | 0.25 | 0.50 | 0.75 | 1.00 | 1.25 |
| OB | 0.24 | 0.47 | 0.71 | 0.95 | 1.18 | OD | 0.25 | 0.50 | 0.75 | 1.00 | 1.25 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|---------------------------------|---------|---------|--------|--------|------|------|------|------|------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 2266.29 | 2057.24 | 953.06 | 381.44 | 216.33 | 5.42 | 1.88 | 0.54 | 0.00 | 0.00 |
| OB | 2266.29 | 2057.24 | 953.06 | 381.44 | 216.33 | 5.42 | 1.88 | 0.54 | 0.00 | 0.00 |
| OC | 2266.29 | 2141.52 | 1039.43 | 412.39 | 213.70 | 7.91 | 2.17 | 0.52 | 0.00 | 0.00 |
| OD | 2266.29 | 2141.52 | 1039.43 | 412.39 | 213.70 | 7.91 | 2.17 | 0.52 | 0.00 | 0.00 |

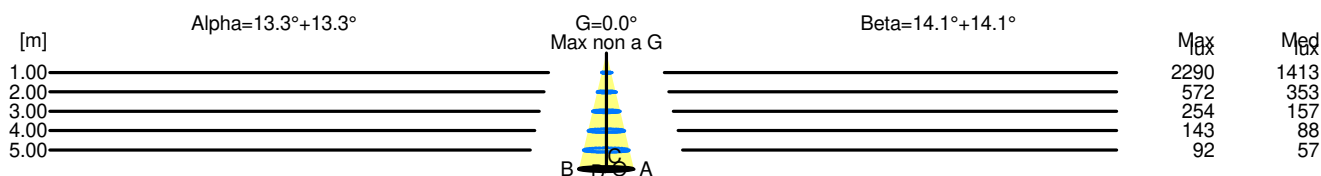

| H[m] | D[m] | Max lux | Med lux | Alpha=13.3°+13.3° | G=0.0 Max non a G |
|------|------|---------|---------|-------------------|----------------------|
| 1.00 | 0.47 | 2290 | 1413 | | |
| 2.00 | 0.95 | 572 | 353 | | |
| 3.00 | 1.42 | 254 | 157 | | |
| 4.00 | 1.89 | 143 | 88 | | |
| 5.00 | 2.37 | 92 | 57 | | |

| H[m] | D[m] | Max lux | Med lux | Beta=14.1°+14.1° | G=0.0 Max non a G |
|------|------|---------|---------|------------------|----------------------|
| 1.00 | 0.50 | 2290 | 1413 | | |
| 2.00 | 1.00 | 572 | 353 | | |
| 3.00 | 1.50 | 254 | 157 | | |
| 4.00 | 2.01 | 143 | 88 | | |
| 5.00 | 2.51 | 92 | 57 | | |