

Luminaire

Code AQ42320
Name A.24 SOSP.MOD.D.SHARP4000K FL 2352 BBRZ

Measurement

Code FTS1802233
Name A.24 SOSP.MOD.D.SHARP4000K FL 2352 BBRZ

Luminaire Flux	3485 lm	Luminaire Power	45.0 W	Efficacy	77.439 lm/W	Efficiency	100.00%
Source Flux	3485 lm	Maximum value	2814.46 cd/klm	Position	C=20.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2352 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	516 mm	Width	12 mm	Height	0 mm
Horizontal Luminous Area		0.006192 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.001498 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-11-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3485 lm	


LED Flux=4281lm LED Power=38W Eff=81% EfcLed=113lm/W EfcLum=77lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 98 100 100 100 100
F UTE --

D DIN 5040
B NBN

A60
BZ 1


2352mm x 27mm



Sempiani C

180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

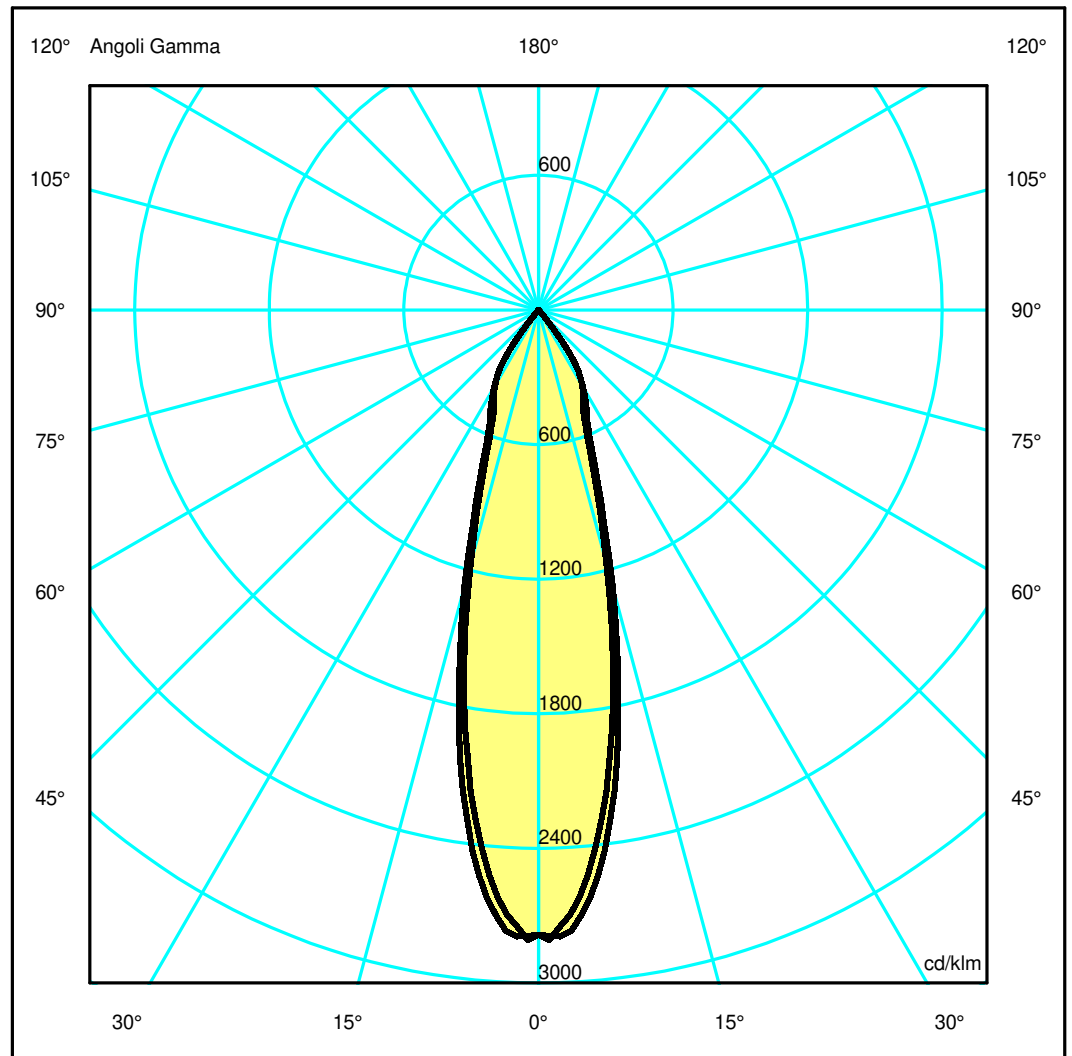

Luminaire

Code AQ42320
Name A.24 SOSP.MOD.D.SHARP4000K FL 2352 BBRZ

Measurement

Code FTS1802233
Name A.24 SOSP.MOD.D.SHARP4000K FL 2352 BBRZ

Luminaire Flux	3485 lm	Luminaire Power	45.0 W	Efficacy	77.439 lm/W	Efficiency	100.00%
Source Flux	3485 lm	Maximum value	2814.46 cd/klm	Position	C=20.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2352 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	516 mm	Width	12 mm	Height	0 mm
Horizontal Luminous Area		0.006192 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.001498 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-11-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3485 lm	


LED Flux=4281lm LED Power=38W Eff=81% EfcLed=113lm/W EfcLum=77lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h

C.I.E.	98 100 100 100 100	D DIN 5040	A60
F UTE	--	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.24	0.47	0.71	0.95	1.18	OC	0.25	0.50	0.75	1.00	1.25
OB	0.24	0.47	0.71	0.95	1.18	OD	0.25	0.50	0.75	1.00	1.25

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	9702.01	8807.08	4080.05	1632.96	926.11	23.21	8.05	2.30	0.00	0.00
OB	9702.01	8807.08	4080.05	1632.96	926.11	23.21	8.05	2.30	0.00	0.00
OC	9702.01	9167.86	4449.80	1765.44	914.84	33.86	9.31	2.21	0.00	0.00
OD	9702.01	9167.86	4449.80	1765.44	914.84	33.86	9.31	2.21	0.00	0.00

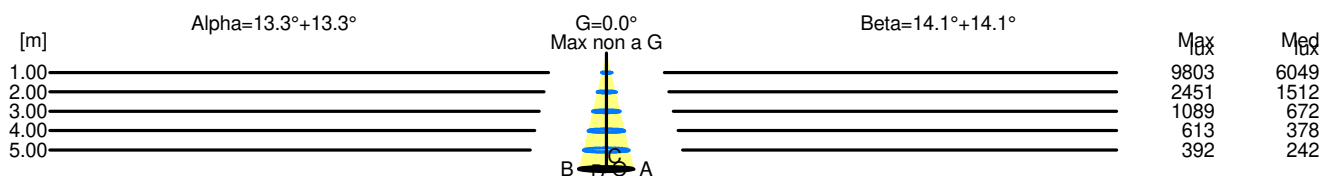

H[m]	D[m]	Max lux	Med lux	Alpha=13.3°+13.3°	G=0.0 Max non a G
1.00	0.47	9803	6049		
2.00	0.95	2451	1512		
3.00	1.42	1089	672		
4.00	1.89	613	378		
5.00	2.37	392	242		

H[m]	D[m]	Max lux	Med lux	Beta=14.1°+14.1°	G=0.0 Max non a G
1.00	0.50	9803	6049		
2.00	1.00	2451	1512		
3.00	1.50	1089	672		
4.00	2.01	613	378		
5.00	2.51	392	242		