

## Luminaire

Code AN11118  
Name VECTOR 55 TRACK 927 SP ND BR.COPPER

## Measurerm.

Code FTS1801597-B  
Name VECTOR 55 TRACK 927 SP ND BR.COPPER

|  |         |                 |                |                             |               |                 |                 |
|--|---------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux   | 1677 lm | Luminaire Power | 20.0 W         | Efficacy                    | 83.850 lm/W   | Efficiency      | 100.00%         |
| Source Flux  | 1677 lm | Maximum value   | 7350.97 cd/klm | Position                    | C=0.00 G=0.00 | CG              | Rotosymmetrical |
| Round Luminaire  |         | Diam.           | 55 mm          | Height                      | 130 mm        |                 |                 |
| Round Luminous Area  |         | Diam.           | 48 mm          | Height                      | 0 mm          |                 |                 |
| Horizontal Luminous Area   |         | 0.001810 m2     |                | Emitting area on Plane 180° |               | 0.000000 m2     |                 |
| Emitting area on Plane 0°  |         | 0.000000 m2     |                | Emitting area on Plane 270° |               | 0.000000 m2     |                 |
| Emitting area on Plane 90°   |         | 0.000000 m2     |                | Glare area at 76°           |               | 0.000438 m2     |                 |
| Coordinate system  |         | CG              |                | Symmetry Type               |               | Rotosymmetrical |                 |
| Date   |         | 29-02-2024      |                | Maximum Gamma Angle         |               | 180             |                 |
| Measurement Distance   |         | 0.00            |                | Measurement Flux            |               | 1677 lm         |                 |
| LED Flux=2359lm LED Power=17W Eff=71% EfcLed=136lm/W EfcLum=84lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h |         |                 |                |                             |               |                 |                 |
| C.I.E.   | 99      | 100             | 100            | 100                         | D DIN 5040    | A60             |                 |
| F UTE  | --      |                 |                |                             | B NBN         | BZ 1            |                 |


Diam=55mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %

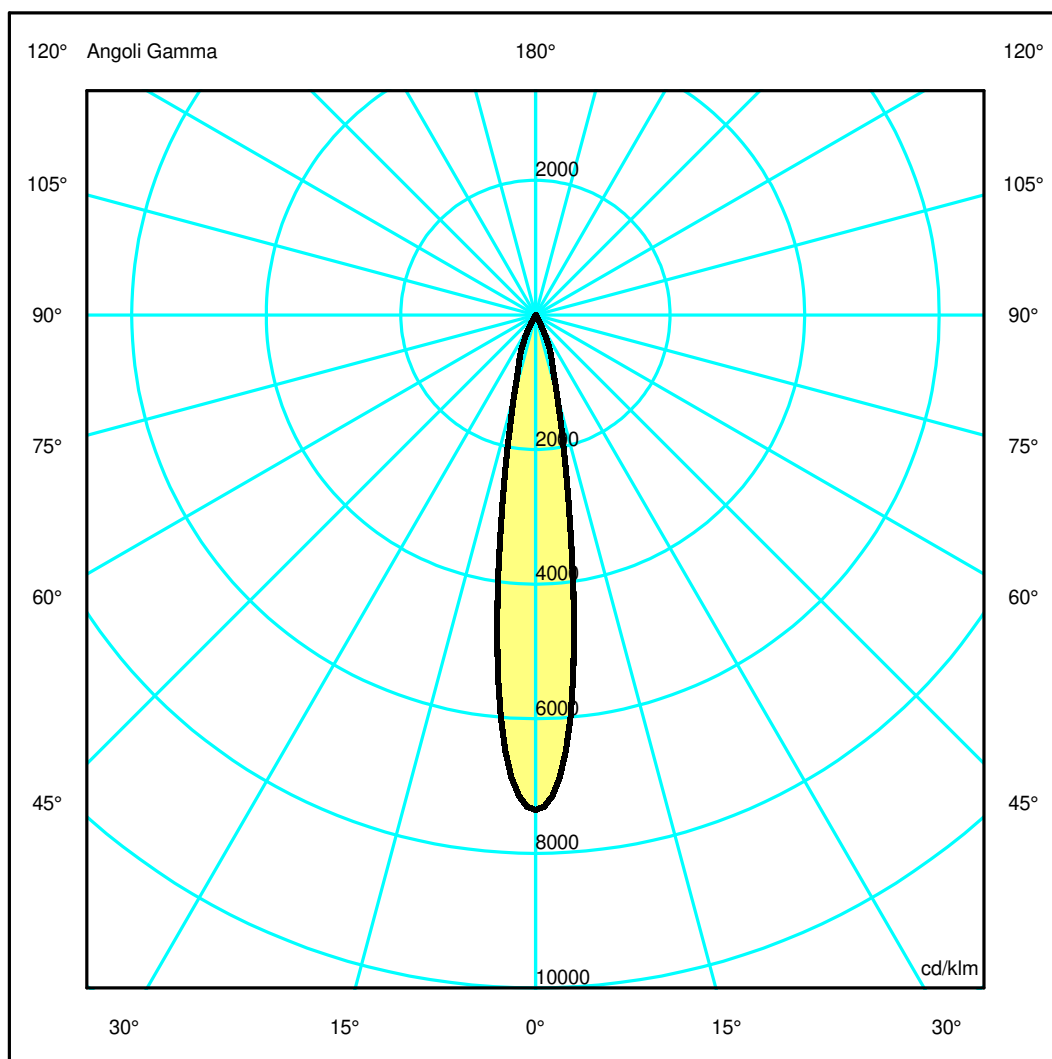

## Luminaire

Code AN11118  
Name VECTOR 55 TRACK 927 SP ND BR.COPPER

## Measurerm.


Code FTS1801597-B  
Name VECTOR 55 TRACK 927 SP ND BR.COPPER

|  |         |                 |                |                             |               |                 |                 |
|--|---------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux   | 1677 lm | Luminaire Power | 20.0 W         | Efficacy                    | 83.850 lm/W   | Efficiency      | 100.00%         |
| Source Flux  | 1677 lm | Maximum value   | 7350.97 cd/klm | Position                    | C=0.00 G=0.00 | CG              | Rotosymmetrical |
| Round Luminaire  |         | Diam.           | 55 mm          | Height                      | 130 mm        |                 |                 |
| Round Luminous Area  |         | Diam.           | 48 mm          | Height                      | 0 mm          |                 |                 |
| Horizontal Luminous Area   |         | 0.001810 m2     |                | Emitting area on Plane 180° |               | 0.000000 m2     |                 |
| Emitting area on Plane 0°  |         | 0.000000 m2     |                | Emitting area on Plane 270° |               | 0.000000 m2     |                 |
| Emitting area on Plane 90°   |         | 0.000000 m2     |                | Glare area at 76°           |               | 0.000438 m2     |                 |
| Coordinate system  |         | CG              |                | Symmetry Type               |               | Rotosymmetrical |                 |
| Date   |         | 29-02-2024      |                | Maximum Gamma Angle         |               | 180             |                 |
| Measurement Distance   |         | 0.00            |                | Measurement Flux            |               | 1677 lm         |                 |
| LED Flux=2359lm LED Power=17W Eff=71% EfcLed=136lm/W EfcLum=84lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h |         |                 |                |                             |               |                 |                 |
| C.I.E.   | 99      | 100             | 100            | 100                         | 100           | D DIN 5040      | A60             |
| F UTE  | --      |                 |                |                             |               | B NBN           | BZ 1            |

### Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA   | 0.15 | 0.30 | 0.45 | 0.60 | 0.75 | OC   | 0.15 | 0.30 | 0.45 | 0.60 | 0.75 |
| OB   | 0.15 | 0.30 | 0.45 | 0.60 | 0.75 | OD   | 0.15 | 0.30 | 0.45 | 0.60 | 0.75 |

|    | Luminous Intensities [ cd/klm ] |          |         |        |       |      |      |      |      |      |
|----|---------------------------------|----------|---------|--------|-------|------|------|------|------|------|
|    | 0                               | 5        | 15      | 25     | 35    | 45   | 55   | 65   | 75   | 85   |
| OA | 12327.58                        | 10014.66 | 2059.52 | 596.23 | 18.71 | 7.10 | 3.46 | 2.06 | 1.10 | 0.44 |
| OB | 12327.58                        | 10014.66 | 2059.52 | 596.23 | 18.71 | 7.10 | 3.46 | 2.06 | 1.10 | 0.44 |
| OC | 12327.58                        | 10014.66 | 2059.52 | 596.23 | 18.71 | 7.10 | 3.46 | 2.06 | 1.10 | 0.44 |
| OD | 12327.58                        | 10014.66 | 2059.52 | 596.23 | 18.71 | 7.10 | 3.46 | 2.06 | 1.10 | 0.44 |

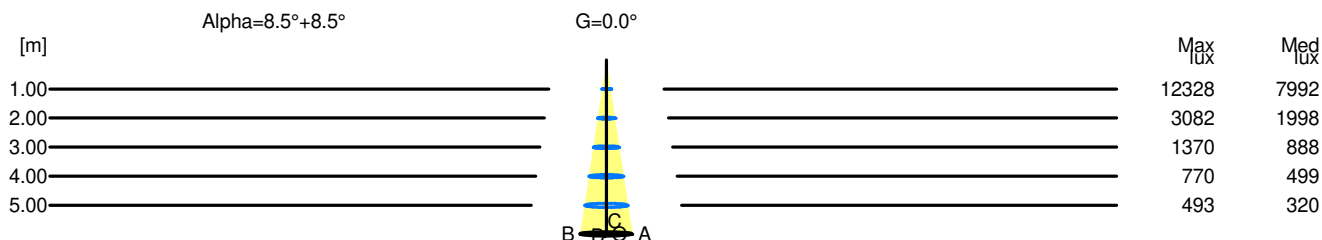

| H[m] | D[m] | Max lux | Med lux | Alpha=8.5°+8.5° | G=0.0 |
|------|------|---------|---------|-----------------|-------|
| 1.00 | 0.30 | 12328   | 7992    |                 |       |
| 2.00 | 0.60 | 3082    | 1998    |                 |       |
| 3.00 | 0.90 | 1370    | 888     |                 |       |
| 4.00 | 1.20 | 770     | 499     |                 |       |
| 5.00 | 1.50 | 493     | 320     |                 |       |