

## Luminaire

Code BH23405+BH16301  
 Name A.39 RCS TRIM SHARP 2368 HB XF 930 SLV + 6X4 OPT. HB WHITE

## Measurement

Code FTS1900753  
 Name A.39 RCS TRIM SHARP 2368 HB XF 930 SLV + 6X4 OPT. HB WHITE


Luminaire Flux	4791.79 lm	Luminaire Power	66.00 W	Efficacy	72.60 lm/W	Efficiency	100.00%
Sources Flux	4791.79 lm	Maximum value	1406.35 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	2368 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	888 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.032856 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.007949 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-07-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4791.79 lm	

LED Flux=6529,09lm LED Power=66W Eff=73% EfcLed=99lm/W EfcLum=73lm/W Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 97 99 100 100 100  
 F UTE --

D DIN 5040  
 B NBN  
 A60  
 BZ 1


2368mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

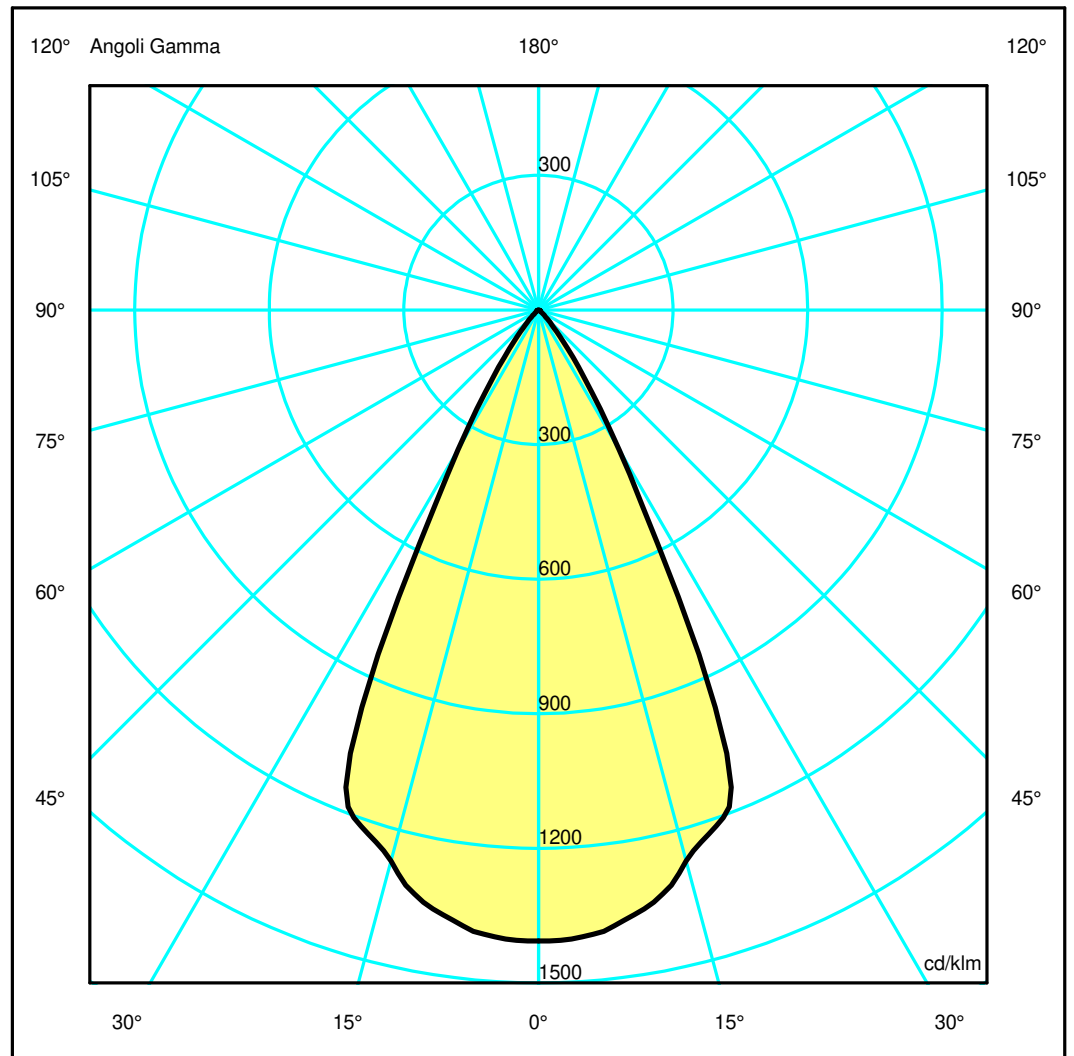

## Luminaire

Code BH23405+BH16301  
 Name A.39 RCS TRIM SHARP 2368 HB XF 930 SLV + 6X4 OPT. HB WHITE

## Measurerm.


Code FTS1900753  
 Name A.39 RCS TRIM SHARP 2368 HB XF 930 SLV + 6X4 OPT. HB WHITE

Luminaire Flux	4791.79 lm	Luminaire Power	66.00 W	Efficacy	72.60 lm/W	Efficiency	100.00%
Sources Flux	4791.79 lm	Maximum value	1406.35 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	2368 mm	Width	40 mm	Height	111 mm	
Rectangular Luminous Area	Length	888 mm	Width	37 mm	Height	0 mm	
Horizontal Luminous Area	0.032856 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.007949 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Date	17-07-2017	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	4791.79 lm	LED Flux=6529,09lm LED Power=66W Eff=73% EfcLed=99lm/W EfcLum=73lm/W Ra=90 SDCM=2 L90(20K)=118000h			
C.I.E.	97 99 100 100 100	D DIN 5040	A60				
F UTE	--	B NBN	BZ 1				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.49	0.98	1.47	1.96	2.45	OC	0.49	0.98	1.47	1.96	2.45
OB	0.49	0.98	1.47	1.96	2.45	OD	0.49	0.98	1.47	1.96	2.45

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6738.90	6690.81	6090.45	4054.43	742.97	129.15	30.25	19.34	12.69	4.73
OB	6738.90	6690.81	6090.45	4054.43	742.97	129.15	30.25	19.34	12.69	4.73
OC	6738.90	6690.81	6090.45	4054.43	742.97	129.15	30.25	19.34	12.69	4.73
OD	6738.90	6690.81	6090.45	4054.43	742.97	129.15	30.25	19.34	12.69	4.73

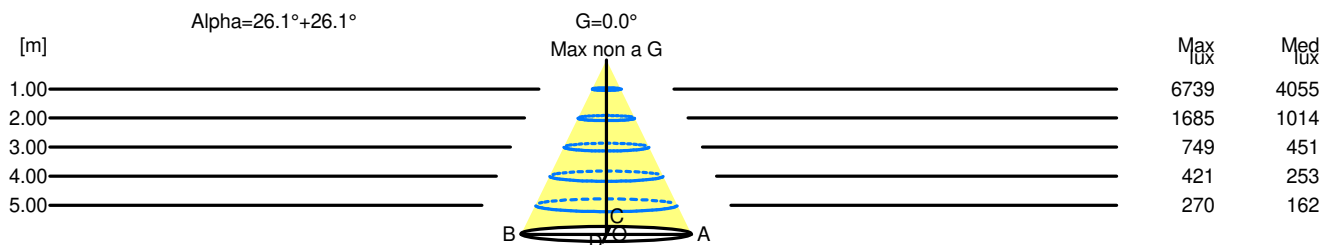

H[m]	D[m]	Max lux	Med lux	Alpha=26.1°+26.1°	G=0.0 Max non a G
1.00	0.98	6739	4055		
2.00	1.96	1685	1014		
3.00	2.94	749	451		
4.00	3.91	421	253		
5.00	4.89	270	162		