

Luminaire

Code BH10101+BH16301
 Name A.39 SHARP D+IND 2368 HB 17 400K ND BCO + COVER 6X4 OPT. HB WHITE

Measurem.

Code FTS1900559
 Name A.39 SHARP D+IND 2368 HB 17 400K ND BCO + COVER 6X4 OPT. HB WHITE


Luminaire Flux	11469.40 lm	Luminaire Power	125.00 W	Efficacy	91.76 lm/W	Efficiency	100.00%
Sources Flux	11469.40 lm	Maximum value	2557.10 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	888 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.032856 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007949 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		11469.40 lm	

LED Flux=14244,9lm LED Power=103W Eff=81% EfcLed=138lm/W EfcLum=92lm/W Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 99 100 100 46 100
 F UTE --

D DIN 5040
 B NBN
 C62
 BZ 1


2368mm x 40mm



Semipiani C

180.0 — 0.0
 270.0 — 90.0

ULOR 53.85 %
 DLOR 46.15 %
 RN 53.85 %

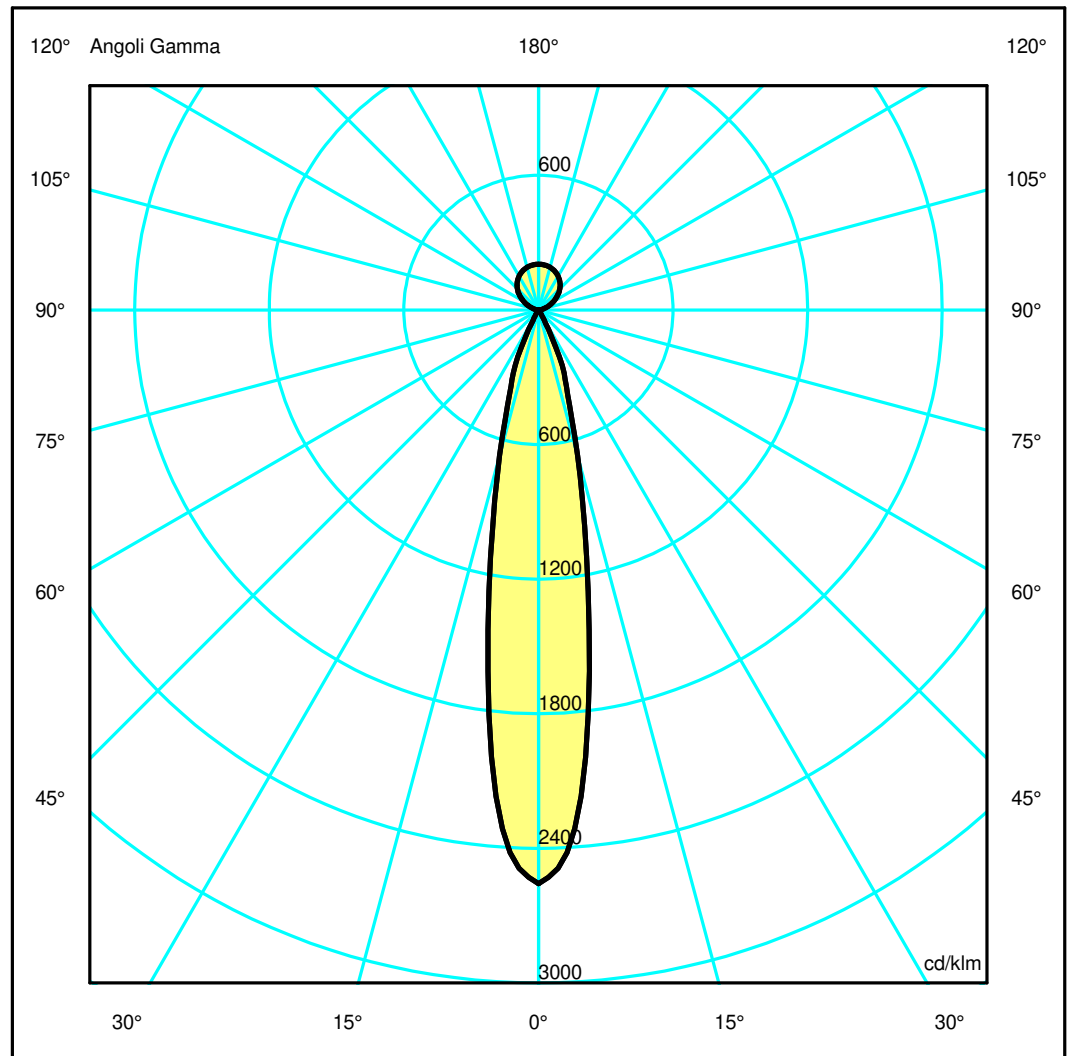

Luminaire

Code BH10101+BH16301
Name A.39 SHARP D+IND 2368 HB 17 400K ND BCO + COVER 6X4 OPT. HB WHITE

Measurerm.


Code FTS1900559
Name A.39 SHARP D+IND 2368 HB 17 400K ND BCO + COVER 6X4 OPT. HB WHITE

Luminaire Flux	11469.40 lm	Luminaire Power	125.00 W	Efficacy	91.76 lm/W	Efficiency	100.00%
Sources Flux	11469.40 lm	Maximum value	2557.10 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	888 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.032856 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007949 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		11469.40 lm	
LED Flux=14244,9lm LED Power=103W Eff=81% EfcLed=138lm/W EfcLum=92lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99 100 100 46 100			D DIN 5040	C62		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.35	0.53	0.70	0.88	OC	0.18	0.35	0.53	0.70	0.88
OB	0.18	0.35	0.53	0.70	0.88	OD	0.18	0.35	0.53	0.70	0.88

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	29328.45	24958.62	7700.03	2105.33	132.10	37.27	12.96	8.30	5.88	2.77
OB	29328.45	24958.62	7700.03	2105.33	132.10	37.27	12.96	8.30	5.88	2.77
OC	29328.45	24958.62	7700.03	2105.33	132.10	37.27	12.96	8.30	5.88	2.77
OD	29328.45	24958.62	7700.03	2105.33	132.10	37.27	12.96	8.30	5.88	2.77

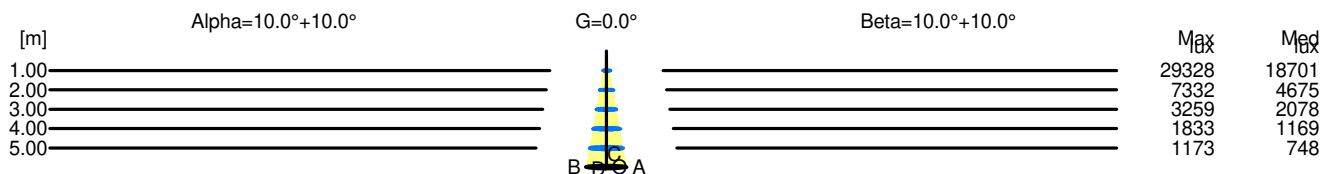

H[m]	D[m]	Max lux	Med lux	Alpha=10.0°+10.0°	G=0.0
1.00	0.35	29328	18701		
2.00	0.70	7332	4675		
3.00	1.05	3259	2078		
4.00	1.41	1833	1169		
5.00	1.76	1173	748		

H[m]	D[m]	Max lux	Med lux	Beta=10.0°+10.0°	G=0.0
1.00	0.35	29328	18701		
2.00	0.70	7332	4675		
3.00	1.05	3259	2078		
4.00	1.41	1833	1169		
5.00	1.76	1173	748		