

Luminaire

Code AT23305+AT09506
 Name A.39 SOS DIR\IND DIFF 2368MM 840 ND SIL

Measurerm.

Code FTS1801093
 Name A.39 SOS DIR\IND DIFF 2368MM 840 ND SIL

Luminaire Flux	10131.84 lm	Luminaire Power	116.00 W	Efficacy	87.34 lm/W	Efficiency	100.00%
Sources Flux	10131.84 lm	Maximum value	231.51 cd/klm	Position	C=0.00 G=179.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	2360 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.094400 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°	0.022837 m2		
Coordinate system		CG			Symmetry Type	Double Symmetrical	
Date		12-06-2018			Maximum Gamma Angle	180	
Measurement Distance		0.00			Measurement Flux	10131.84 lm	


LED Flux=16934,4lm LED Power=101,5W Eff=60% EfcLed=167lm/W EfcLum=87lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h

C.I.E. 50 81 96 39 100
 F UTE 0.39 E + 0.61 T

D DIN 5040
 B NBN

D32
 BZ 4


2368mm x 45mm



Sempiani C

180.0 — 0.0
 270.0 — 90.0

ULOR 60.96 %
 DLOR 39.04 %
 RN 60.96 %

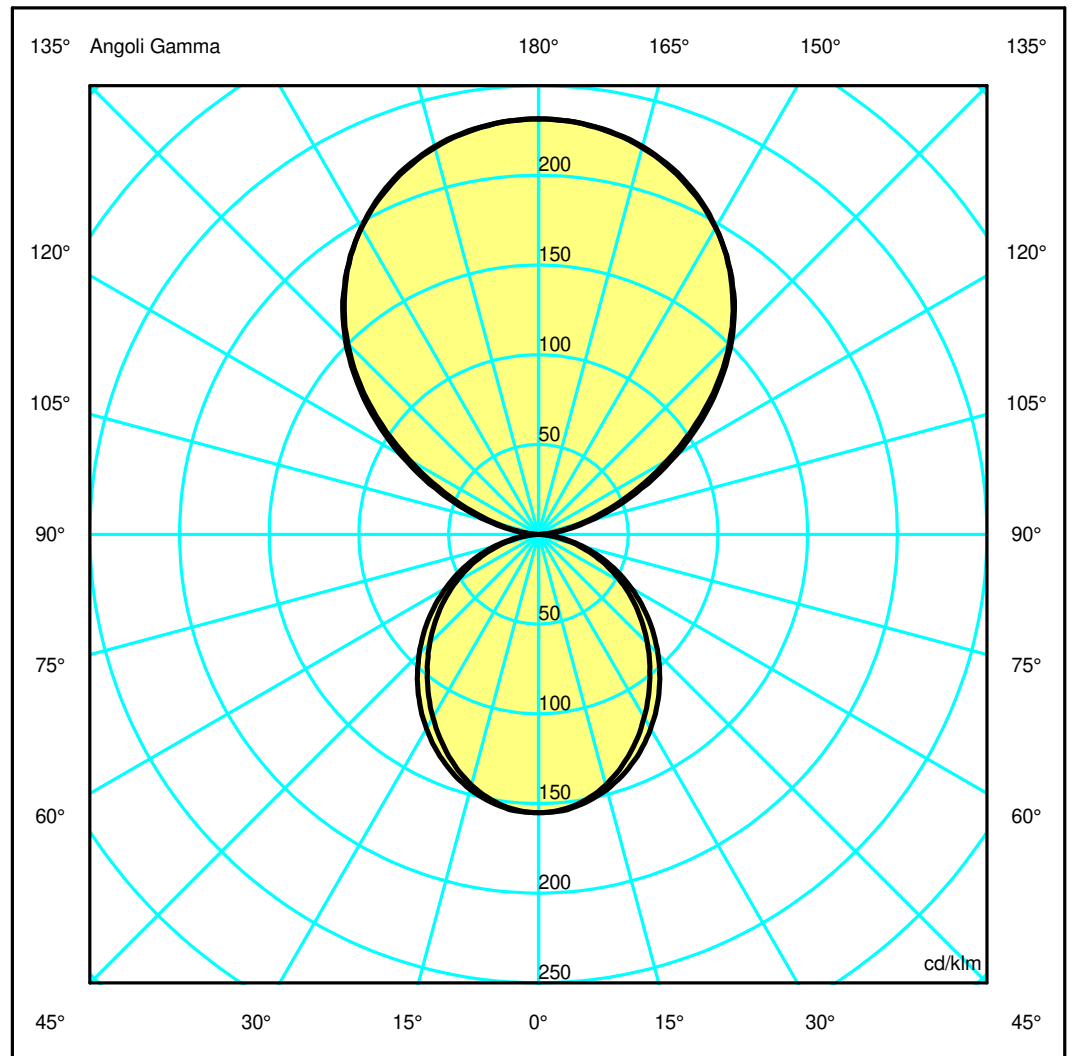

Luminaire

Code AT23305+AT09506
Name A.39 SOS DIR\IND DIFF 2368MM 840 ND SIL

Measurerm.

Code FTS1801093
Name A.39 SOS DIR\IND DIFF 2368MM 840 ND SIL

Luminaire Flux	10131.84 lm	Luminaire Power	116.00 W	Efficacy	87.34 lm/W	Efficiency	100.00%
Sources Flux	10131.84 lm	Maximum value	231.51 cd/klm	Position	C=0.00 G=179.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	2360 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.094400 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.022837 m2	
Coordinate system	CG	Symmetry Type		Double Symmetrical			
Date	12-06-2018	Maximum Gamma Angle		180			
Measurement Distance	0.00	Measurement Flux		10131.84 lm			


LED Flux=16934,4lm LED Power=101,5W Eff=60% EfcLed=167lm/W EfcLum=87lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h

C.I.E.	50 81 96 39 100	D DIN 5040	D32
F UTE	0.39 E + 0.61 T	B NBN	BZ 4

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.33	2.66	3.99	5.32	6.65	OC	1.37	2.74	4.11	5.47	6.84
OB	1.33	2.66	3.99	5.32	6.65	OD	1.37	2.74	4.11	5.47	6.84

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2345.53	2337.78	2267.31	2114.46	1864.55	1522.48	1078.61	623.11	263.99	38.39
OB	2345.53	2337.78	2267.31	2114.46	1864.55	1522.48	1078.61	623.11	263.99	38.39
OC	2345.53	2336.04	2260.22	2105.74	1869.49	1540.24	1121.88	681.13	304.67	58.32
OD	2345.53	2336.04	2260.22	2105.74	1869.49	1540.24	1121.88	681.13	304.67	58.32

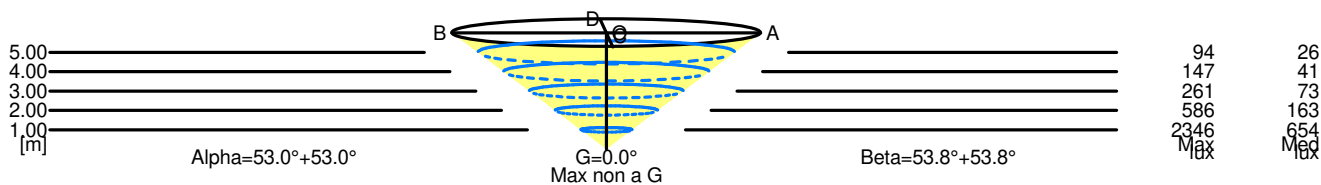

5.00	13.29	94	26		
4.00	10.63	147	41		
3.00	7.97	261	73		
2.00	5.32	586	163		
1.00	2.66	2346	654		
H[m]	D[m]	Max lux	Med lux	Alpha=53.0°+53.0°	Max non a G G=0.0°

5.00	13.68	94	26		
4.00	10.95	147	41		
3.00	8.21	261	73		
2.00	5.47	586	163		
1.00	2.74	2346	654		
H[m]	D[m]	Max lux	Med lux	Beta=53.8°+53.8°	Max non a G G=0.0°