

## Luminaire

Code AT19605  
Name A.39 DIR/IND CTRL EMIS 1184MM 840 DM SIL

## Measurement

Code FTS1801892  
Name A.39 DIR/IND CTRL EMIS 1184MM 840 DM SIL

Luminaire Flux	5072.70 lm	Luminaire Power	57.00 W	Efficacy	88.99 lm/W	Efficiency	100.00%
Sources Flux	5072.70 lm	Maximum value	233.51 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	1176 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.047040 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.011380 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		04-09-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5072.70 lm	


LED Flux=8467,2lm LED Power=50,75W Eff=60% EfcLed=167lm/W EfcLum=89lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h

C.I.E. 72 97 99 39 100  
F UTE 0.39 B + 0.61 T

D DIN 5040  
B NBN

D62  
BZ 2

1184mm x 45mm




Semipiani C

180.0 — 0.0  
270.0 — 90.0

ULOR 60.88 %

DLOR 39.12 %

RN 60.88 %

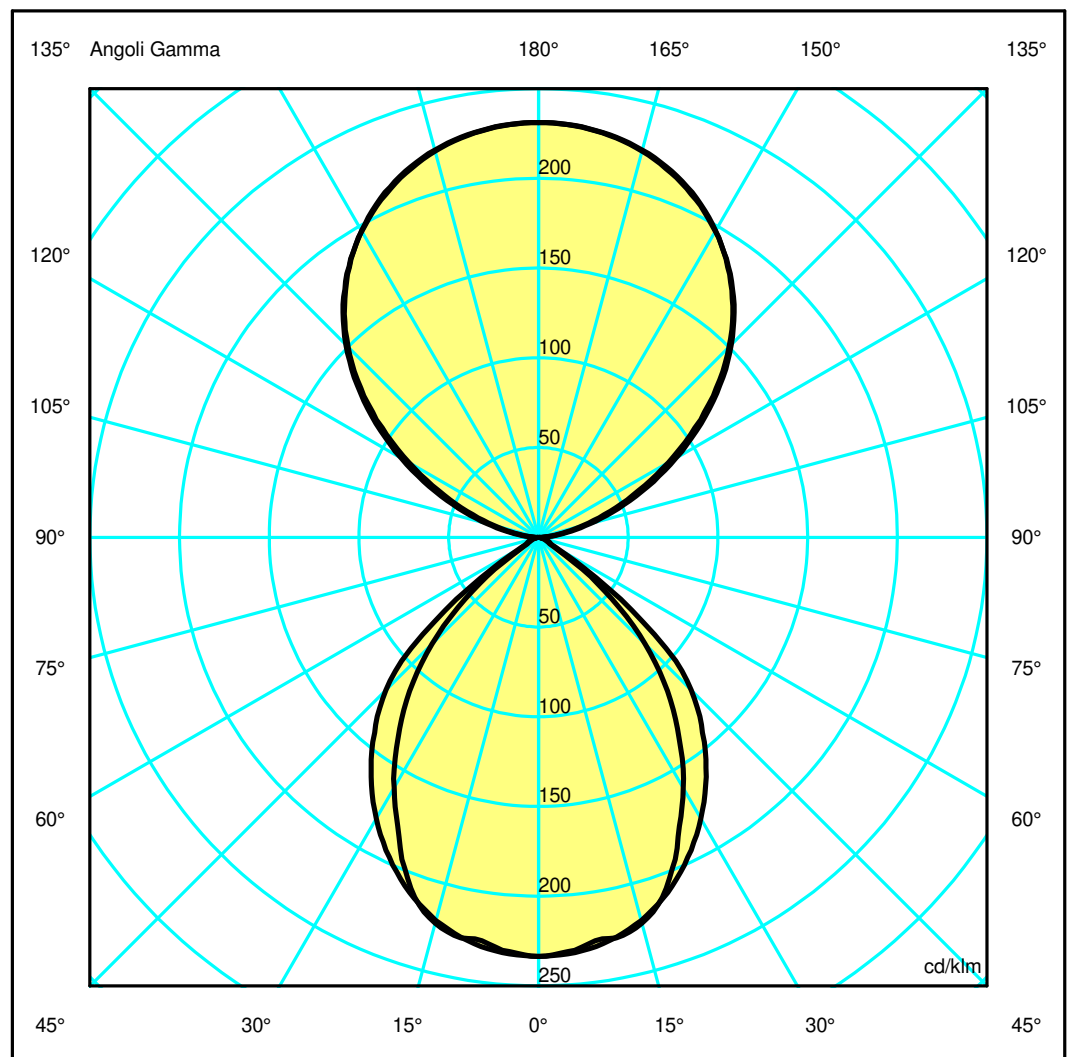

## Luminaire

Code AT19605  
Name A.39 DIR/IND CTRL EMIS 1184MM 840 DM SIL

## Measurerm.


Code FTS1801892  
Name A.39 DIR/IND CTRL EMIS 1184MM 840 DM SIL

Luminaire Flux	5072.70 lm	Luminaire Power	57.00 W	Efficacy	88.99 lm/W	Efficiency	100.00%
Sources Flux	5072.70 lm	Maximum value	233.51 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	1176 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.047040 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.011380 m2	
Coordinate system	CG			Symmetry Type		Double Symmetrical	
Date	04-09-2018			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		5072.70 lm	
LED Flux=8467,2lm LED Power=50,75W Eff=60% EfcLed=167lm/W EfcLum=89lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h							
C.I.E.	72 97 99 39 100			D DIN 5040	D62		
F UTE	0.39 B + 0.61 T			B NBN	BZ 2		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.81	1.62	2.43	3.24	4.05	OC	1.02	2.05	3.07	4.10	5.12
OB	0.81	1.62	2.43	3.24	4.05	OD	1.02	2.05	3.07	4.10	5.12

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1184.53	1171.58	1128.84	933.60	692.25	426.42	119.62	27.44	13.26	3.07
OB	1184.53	1171.58	1128.84	933.60	692.25	426.42	119.62	27.44	13.26	3.07
OC	1184.53	1177.74	1120.95	997.81	825.93	610.07	198.81	34.40	19.09	4.42
OD	1184.53	1177.74	1120.95	997.81	825.93	610.07	198.81	34.40	19.09	4.42

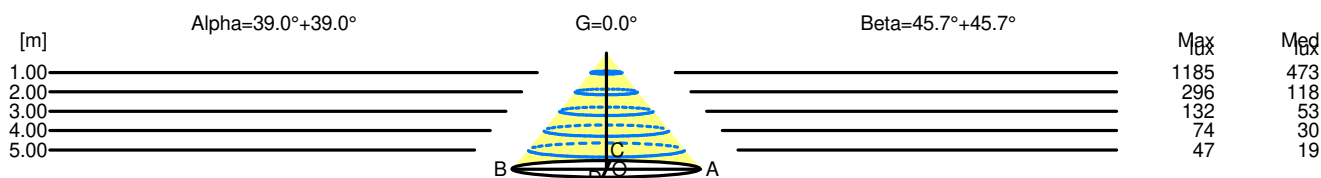

H[m]	D[m]	Max lux	Med lux	Alpha=39.0°+39.0°	G=0.0
1.00	1.62	1185	473		
2.00	3.24	296	118		
3.00	4.86	132	53		
4.00	6.48	74	30		
5.00	8.10	47	19		

H[m]	D[m]	Max lux	Med lux	Beta=45.7°+45.7°	G=0.0
1.00	2.05	1185	473		
2.00	4.10	296	118		
3.00	6.14	132	53		
4.00	8.19	74	30		
5.00	10.24	47	19		