


## Luminaire

Code BB00600\_W+M239200  
 Name LUCERI TLESS 36W 230V TW COMFORT + LUCERI LED SCHERMO TRASPARENTE

## Measurement

Code FTS2102224  
 Name LUCERI TLESS 36W 230V TW COMFORT + LUCERI LED SCHERMO TRASPARENTE

Luminaire Flux	2602.78 lm	Luminaire Power	36.00 W	Efficacy	72.30 lm/W	Efficiency	100.00%
Sources Flux	2602.78 lm	Maximum value	682.36 cd/klm	Position	C=0.00 G=8.00	CG	Rotosymmetrical
Round Luminaire		Diam.	337 mm	Height	215 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area			0.030172 m <sup>2</sup>	Emitting area on Plane 180°			0.000000 m <sup>2</sup>
Emitting area on Plane 0°			0.000000 m <sup>2</sup>	Emitting area on Plane 270°			0.000000 m <sup>2</sup>
Emitting area on Plane 90°			0.000000 m <sup>2</sup>	Glare area at 76°			0.007299 m <sup>2</sup>
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		30-06-2021		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			2602.78 lm
LED Flux=3343lm LED Power=31W Eff=78% EfcLed=107lm/W EfcLum=72lm/W CCT=2700K Ra=90 SDCM=3 L70(10K)=55000							
C.I.E.	76 93 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1 / 1 / BZ 2		

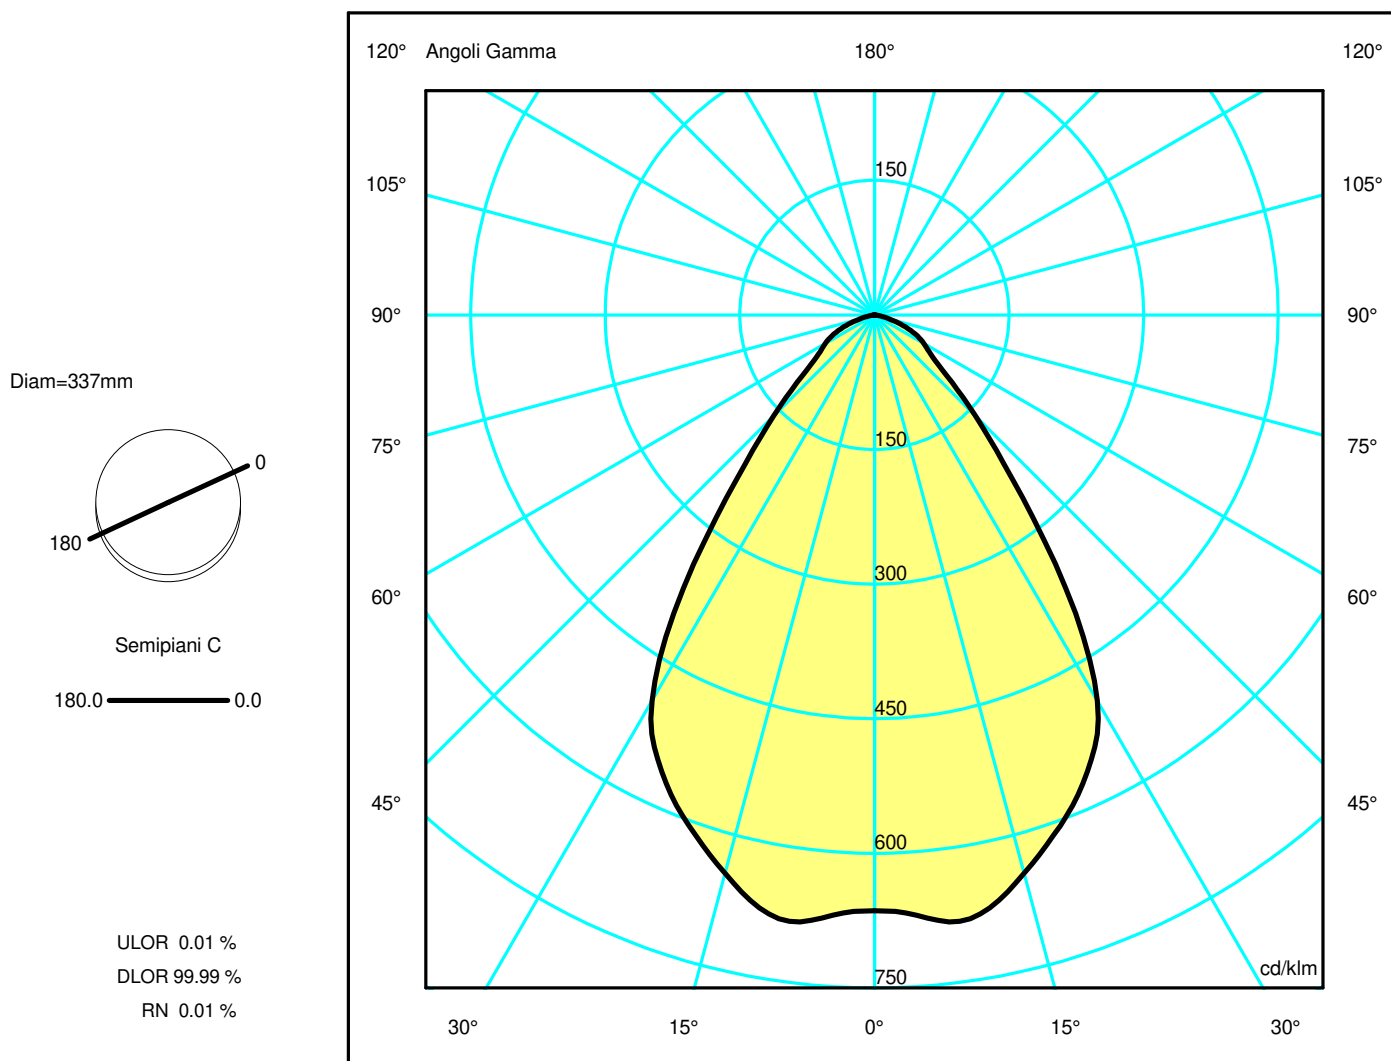

## Luminaire

Code BB00600\_W+M239200  
 Name LUCERI TLESS 36W 230V TW COMFORT + LUCERI LED SCHERMO TRASPARENTE

## Measurement

Code FTS2102224  
 Name LUCERI TLESS 36W 230V TW COMFORT + LUCERI LED SCHERMO TRASPARENTE

Luminaire Flux	2602.78 lm	Luminaire Power	36.00 W	Efficacy	72.30 lm/W	Efficiency	100.00%
Sources Flux	2602.78 lm	Maximum value	682.36 cd/klm	Position	C=0.00 G=8.00	CG	Rotosymmetrical
Round Luminaire		Diam.	337 mm	Height	215 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area		0.030172 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.007299 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-06-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2602.78 lm	


LED Flux=3343lm LED Power=31W Eff=78% EfcLed=107lm/W EfcLum=72lm/W CCT=2700K Ra=90 SDCM=3 L70(10K)=55000

C.I.E.	76 93 99 100 100	D DIN 5040	A60
F UTE	1.00 B	B NBN	BZ 1 / 1 / BZ 2

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.73	1.46	2.18	2.91	3.64	OC	0.73	1.46	2.18	2.91	3.64
OB	0.73	1.46	2.18	2.91	3.64	OD	0.73	1.46	2.18	2.91	3.64

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1728.02	1755.67	1676.74	1461.24	966.19	414.78	199.31	130.02	48.00	6.24
OB	1728.02	1755.67	1676.74	1461.24	966.19	414.78	199.31	130.02	48.00	6.24
OC	1728.02	1755.67	1676.74	1461.24	966.19	414.78	199.31	130.02	48.00	6.24
OD	1728.02	1755.67	1676.74	1461.24	966.19	414.78	199.31	130.02	48.00	6.24

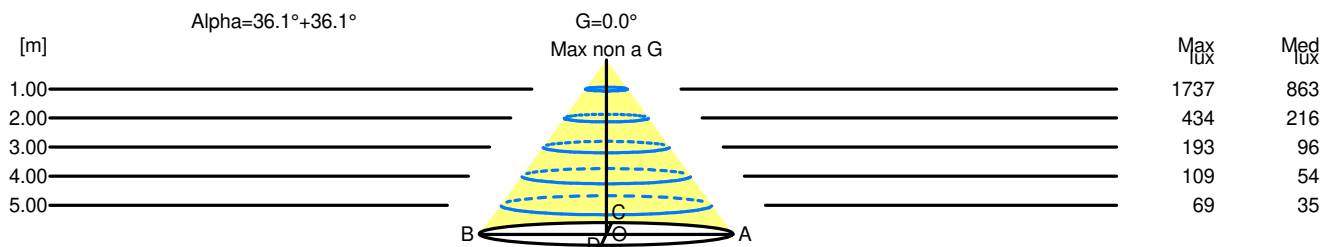

H[m]	D[m]	Max lux	Med lux	Alpha=36.1°+36.1°	G=0.0 Max non a G
1.00	1.46	1737	863		
2.00	2.91	434	216		
3.00	4.37	193	96		
4.00	5.82	109	54		
5.00	7.28	69	35		