

## Luminaire

Code BB00600\_N+M239200  
 Name LUCERI TLESS 36W 230V TW COMFORT + LUCERI LED SCHERMO TRASPARENTE

## Measurement

Code FTS2102225  
 Name LUCERI TLESS 36W 230V TW COMFORT + LUCERI LED SCHERMO TRASPARENTE

Luminaire Flux	2904.05 lm	Luminaire Power	36.00 W	Efficacy	80.67 lm/W	Efficiency	100.00%
Sources Flux	2904.05 lm	Maximum value	677.33 cd/klm	Position	C=0.00 G=8.00	CG	Rotosymmetrical
Round Luminaire		Diam.	337 mm	Height	215 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area			0.030172 m <sup>2</sup>	Emitting area on Plane 180°			0.000000 m <sup>2</sup>
Emitting area on Plane 0°			0.000000 m <sup>2</sup>	Emitting area on Plane 270°			0.000000 m <sup>2</sup>
Emitting area on Plane 90°			0.000000 m <sup>2</sup>	Glare area at 76°			0.007299 m <sup>2</sup>
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		30-06-2021		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			2904.05 lm
LED Flux=3725lm LED Power=32W Eff=78% EfcLed=117lm/W EfcLum=81lm/W CCT=6000K Ra=90 SDCM=3 L70(10K)=55000							
C.I.E.	75 93 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1 / 0.6 / BZ 2		

Diam=337mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

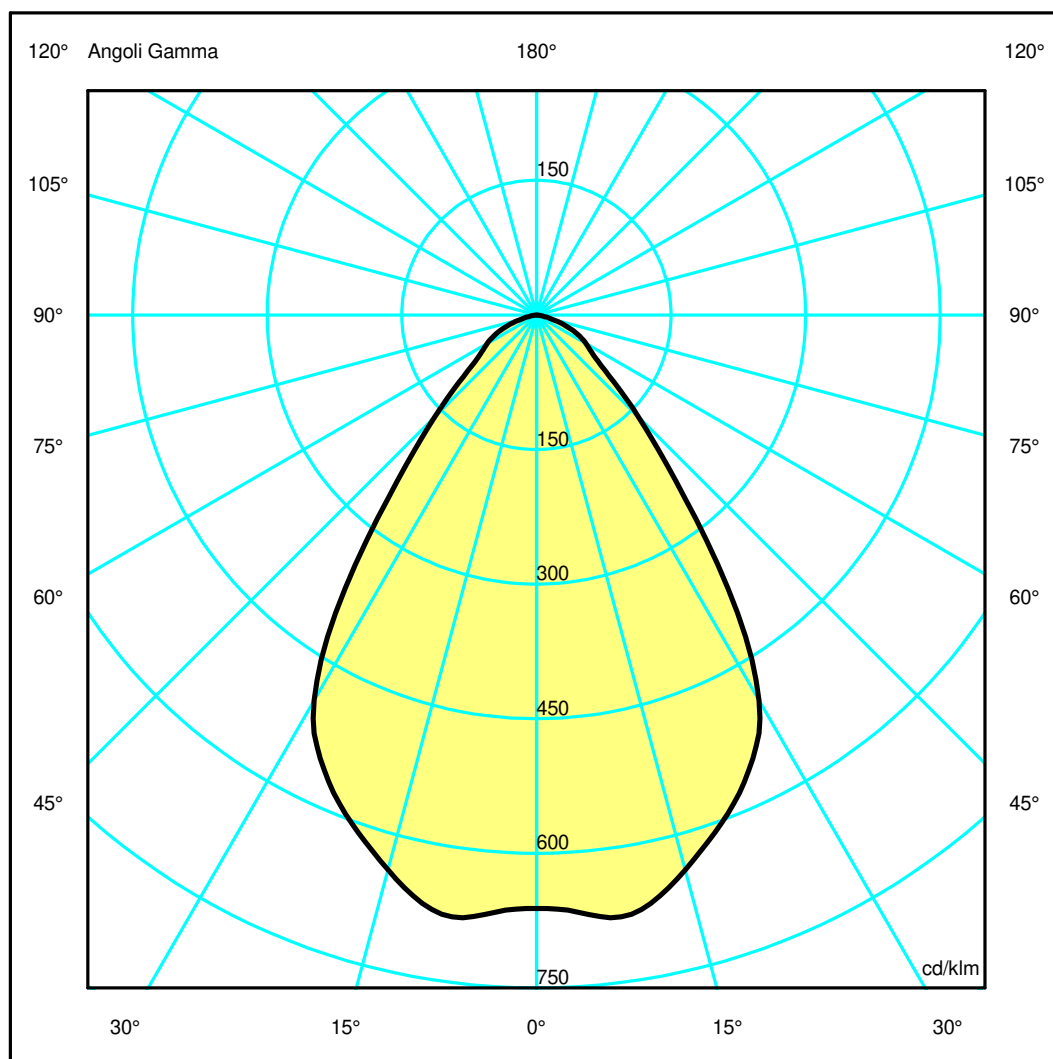

## Luminaire

Code BB00600\_N+M239200  
 Name LUCERI TLESS 36W 230V TW COMFORT + LUCERI LED SCHERMO TRASPARENTE

## Measurement


Code FTS2102225  
 Name LUCERI TLESS 36W 230V TW COMFORT + LUCERI LED SCHERMO TRASPARENTE

Luminaire Flux	2904.05 lm	Luminaire Power	36.00 W	Efficacy	80.67 lm/W	Efficiency	100.00%
Sources Flux	2904.05 lm	Maximum value	677.33 cd/klm	Position	C=0.00 G=8.00	CG	Rotosymmetrical
Round Luminaire		Diam.	337 mm	Height	215 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area		0.030172 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.007299 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-06-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2904.05 lm	
LED Flux=3725lm LED Power=32W Eff=78% EfcLed=117lm/W EfcLum=81lm/W CCT=6000K Ra=90 SDCM=3 L70(10K)=55000							
C.I.E.	75 93 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1 / 0.6 / BZ 2		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.73	1.46	2.19	2.92	3.65	OC	0.73	1.46	2.19	2.92	3.65
OB	0.73	1.46	2.19	2.92	3.65	OD	0.73	1.46	2.19	2.92	3.65

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1920.34	1947.95	1859.02	1625.79	1080.37	465.61	224.17	146.21	53.93	6.97
OB	1920.34	1947.95	1859.02	1625.79	1080.37	465.61	224.17	146.21	53.93	6.97
OC	1920.34	1947.95	1859.02	1625.79	1080.37	465.61	224.17	146.21	53.93	6.97
OD	1920.34	1947.95	1859.02	1625.79	1080.37	465.61	224.17	146.21	53.93	6.97

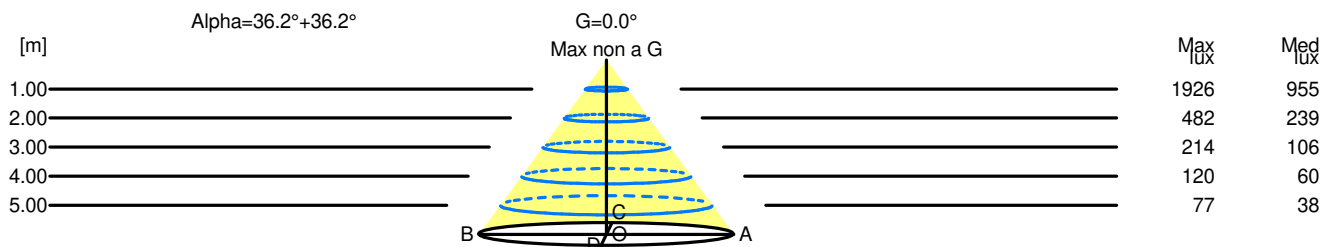

H[m]	D[m]	Max lux	Med lux	Alpha=36.2°+36.2°	G=0.0 Max non a G
1.00	1.46	1926	955		
2.00	2.92	482	239		
3.00	4.39	214	106		
4.00	5.85	120	60		
5.00	7.31	77	38		