

## Luminaire

Code AQ40604  
Name A.24 SOSP.BIN.MAG.+IND.2700K 1176mm BLK

## Measurerm.

Code FTS2300160  
Name A.24 SOSP.BIN.MAG.+IND.2700K 1176mm BLK

Luminaire Flux	1386 lm	Luminaire Power	14.0 W	Efficacy	99.000 lm/W	Efficiency	100.00%
Source Flux	1386 lm	Maximum value	528.26 cd/klm	Position	C=0.00 G=180.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1176 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	650 mm	Width	22 mm	Height	0 mm
Horizontal Luminous Area		0.014300 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003459 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1386 lm	
LED Flux=2346lm LED Power=13W Eff=59% EfcLed=176lm/W EfcLum=99lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	0 0 0 0 100			D DIN 5040	--		
F UTE	1.00 T			B NBN	BZ 10		

1176mm x 27mm




Semipiani C

180.0 — 0.0  
270.0 — 90.0

ULOR 99.99 %

DLOR 0.01 %

RN 99.99 %

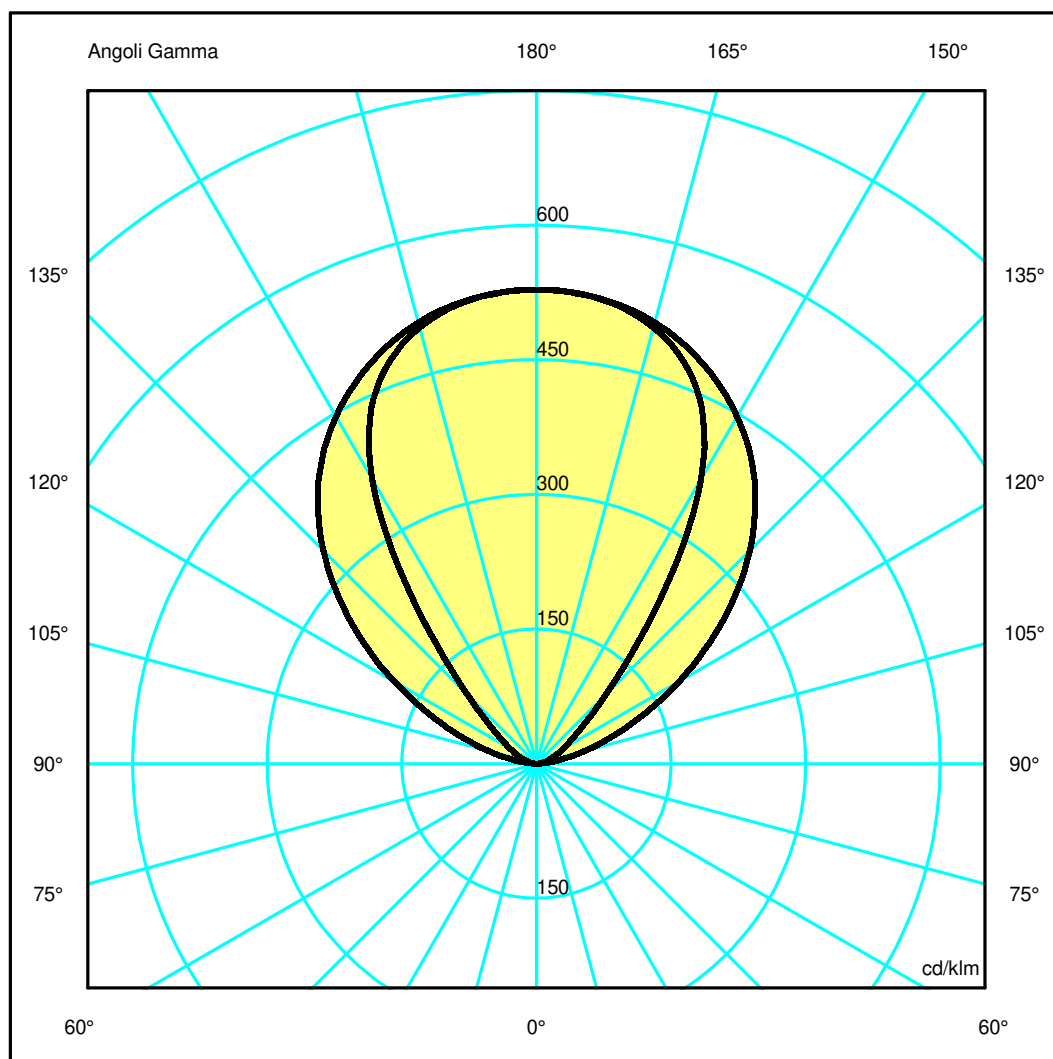

## Luminaire

Code AQ40604  
Name A.24 SOSP.BIN.MAG.+IND.2700K 1176mm BLK

## Measurement

Code FTS2300160  
Name A.24 SOSP.BIN.MAG.+IND.2700K 1176mm BLK

Luminaire Flux	1386 lm	Luminaire Power	14.0 W	Efficacy	99.000 lm/W	Efficiency	100.00%
Source Flux	1386 lm	Maximum value	528.26 cd/klm	Position	C=0.00 G=180.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1176 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	650 mm	Width	22 mm	Height	0 mm
Horizontal Luminous Area		0.014300 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003459 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1386 lm	


LED Flux=2346lm LED Power=13W Eff=59% EfcLed=176lm/W EfcLum=99lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E.	0 0 0 0 100	D DIN 5040	--
F UTE	1.00 T	B NBN	BZ 10

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.71	1.41	2.12	2.83	3.53	OC	1.29	2.59	3.88	5.17	6.47
OB	0.71	1.41	2.12	2.83	3.53	OD	1.29	2.59	3.88	5.17	6.47

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	732.18	729.45	697.32	604.64	373.25	151.06	67.73	34.72	15.34	3.45
OB	732.18	729.45	697.32	604.64	373.25	151.06	67.73	34.72	15.34	3.45
OC	732.18	728.61	705.51	654.41	577.16	466.07	327.13	185.77	78.77	13.97
OD	732.18	728.61	705.51	654.41	577.16	466.07	327.13	185.77	78.77	13.97

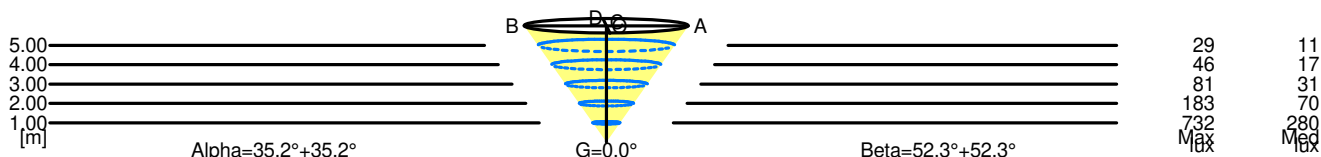

5.00	7.07	29	11		
4.00	5.65	46	17		
3.00	4.24	81	31		
2.00	2.83	183	70		
1.00	1.41	732	280		
H[m]	D[m]	Max lux	Med lux	Alpha=35.2°+35.2°	G=0.0

5.00	12.94	29	11		
4.00	10.35	46	17		
3.00	7.76	81	31		
2.00	5.17	183	70		
1.00	2.59	732	280		
H[m]	D[m]	Max lux	Med lux	Beta=52.3°+52.3°	G=0.0