


Luminaire

Code AD11301
Name PICTO 100 NEWTK New led Verticale ND Bianco 3000K very wide flood

Measurem.

Code FTS1800074
Name PICTO 100 NEWTK New led Verticale ND Bianco 3000K very wide flood

Luminaire Flux	2835.80 lm	Luminaire Power	35.00 W	Efficacy	81.02 lm/W	Efficiency	100.00%
Lamps Flux	2835.80 lm	Maximum value	995.88 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	100 mm 80 mm	Height Height	100 mm 0 mm		
Horizontal Luminous Area	0.005027 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.001216 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	20-04-2017			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	2835.80 lm		
LED Flux=3501lm LED Power=31W Eff=81% EfcLed=113lm/W EfcLum=81lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	84 94 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

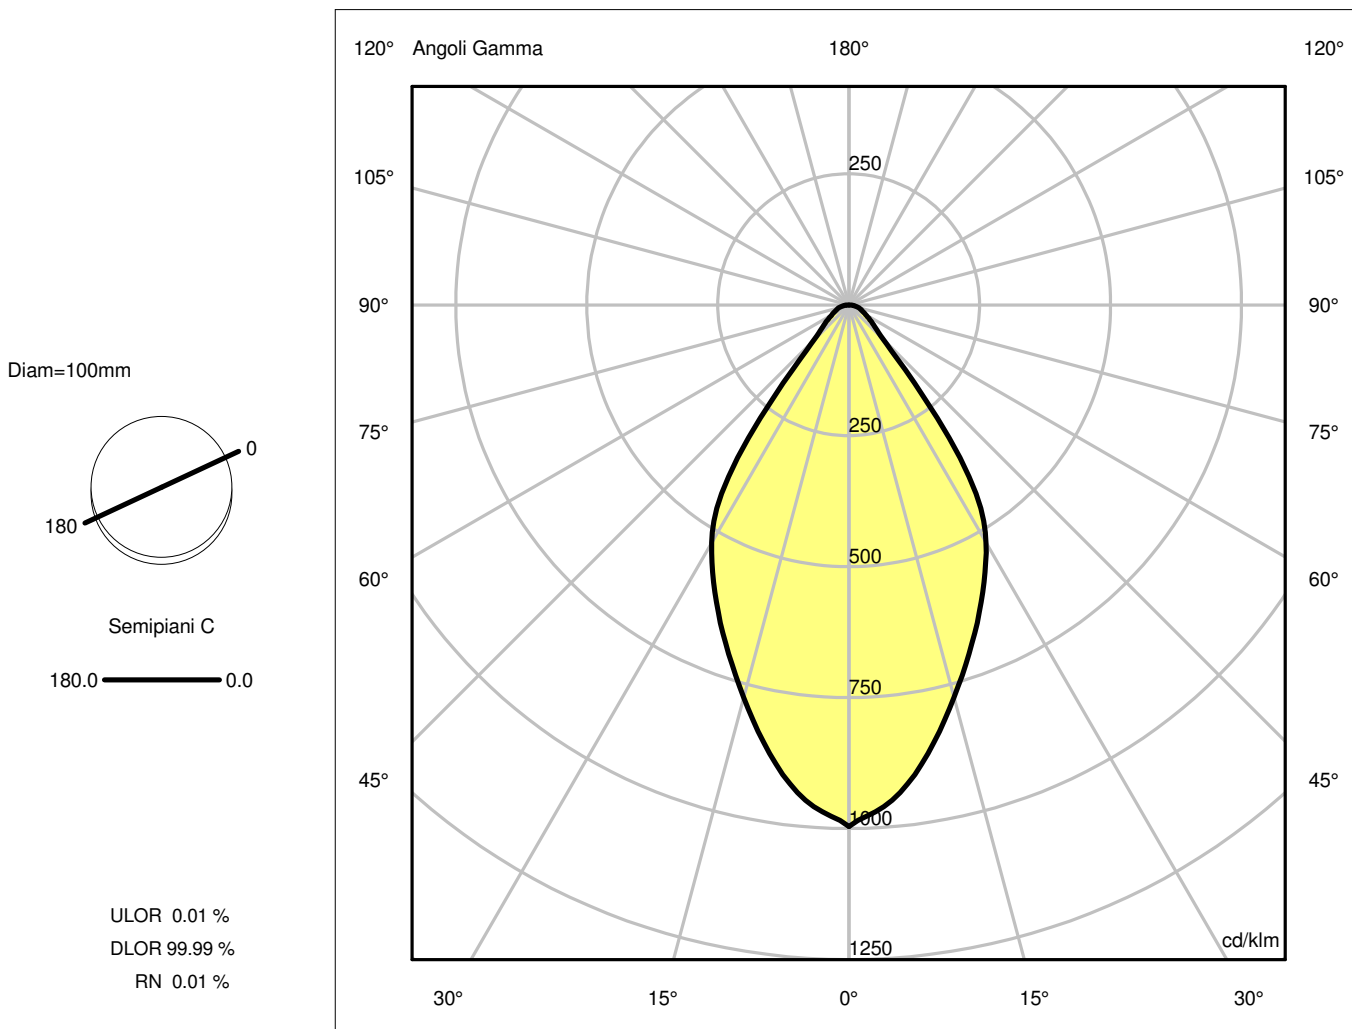

Luminaire

Code AD11301
Name PICTO 100 NEWTK New led Verticale ND Bianco 3000K very wide flood

Measurerm.


Code FTS1800074
Name PICTO 100 NEWTK New led Verticale ND Bianco 3000K very wide flood

Luminaire Flux	2835.80 lm	Luminaire Power	35.00 W	Efficacy	81.02 lm/W	Efficiency	100.00%
Lamps Flux	2835.80 lm	Maximum value	995.88 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	100 mm 80 mm	Height Height	100 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.005027 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.001216 m2	
Coordinate system Date Measurement Distance		CG 20-04-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 2835.80 lm	
LED Flux=3501lm LED Power=31W Eff=81% EfcLed=113lm/W EfcLum=81lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	84 94 99 100 100 1.00 A			D DIN 5040 B NBN		A60 BZ 1	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.61	1.22	1.83	2.44	3.05	OC	0.61	1.22	1.83	2.44	3.05
OB	0.61	1.22	1.83	2.44	3.05	OD	0.61	1.22	1.83	2.44	3.05

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2824.11	2691.77	2200.00	1716.06	1134.21	264.17	139.32	82.61	55.06	15.96
OB	2824.11	2691.77	2200.00	1716.06	1134.21	264.17	139.32	82.61	55.06	15.96
OC	2824.11	2691.77	2200.00	1716.06	1134.21	264.17	139.32	82.61	55.06	15.96
OD	2824.11	2691.77	2200.00	1716.06	1134.21	264.17	139.32	82.61	55.06	15.96

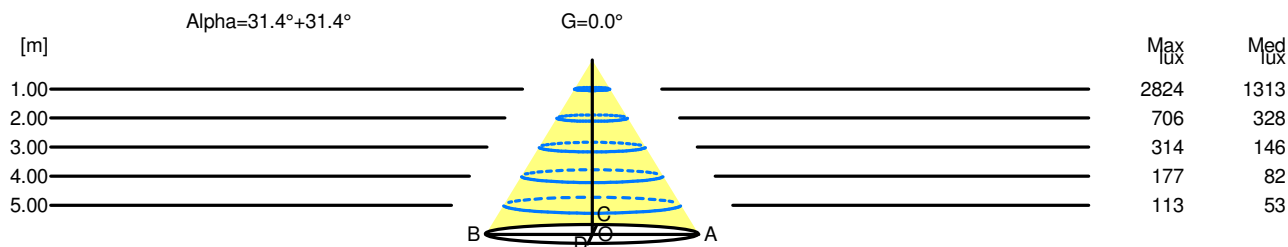

H[m]	D[m]	Max lux	Med lux	Alpha=31.4°+31.4°	G=0.0
1.00	1.22	2824	1313		
2.00	2.44	706	328		
3.00	3.67	314	146		
4.00	4.89	177	82		
5.00	6.11	113	53		