


## Luminaire

Code AD11404  
Name PICTO 100 NEWTK New led Verticale ND Nero 4000K flood

## Measurem.

Code FTS1800077  
Name PICTO 100 NEWTK New led Verticale ND Nero 4000K flood

Luminaire Flux	2928.10 lm	Luminaire Power	35.00 W	Efficacy	83.66 lm/W	Efficiency	100.00%
Lamps Flux	2928.10 lm	Maximum value	1909.63 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	100 mm 80 mm	Height Height	100 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.005027 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.001216 m2	
Coordinate system Date Measurement Distance		CG 20-04-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 2928.10 lm	
LED Flux=3606lm LED Power=31W Eff=81% EfcLed=116lm/W EfcLum=84lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	87 95 99 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

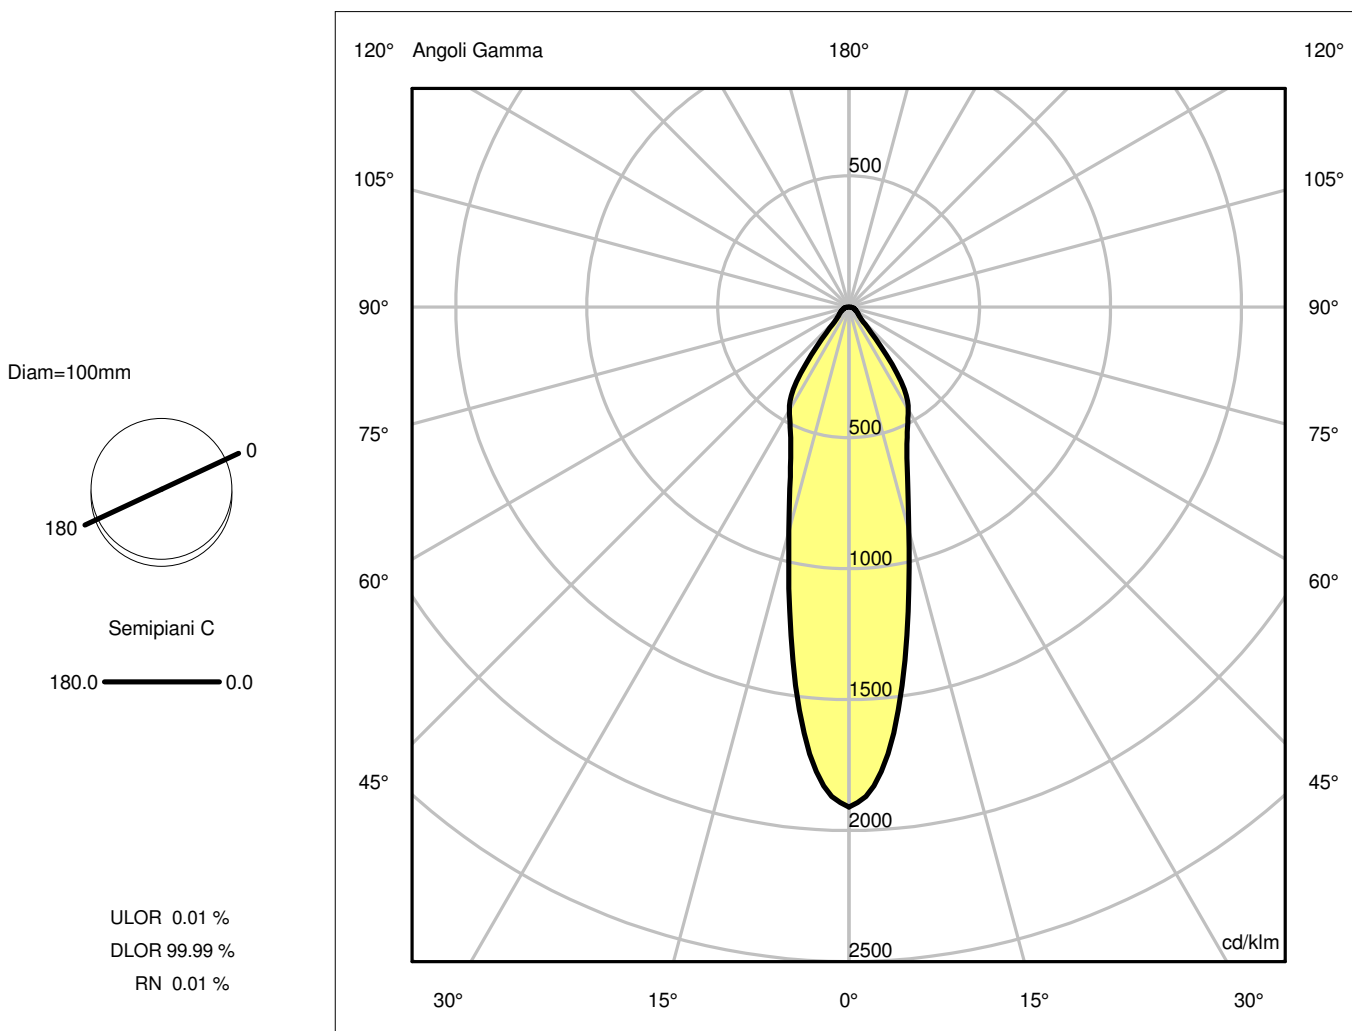

## Luminaire

Code AD11404  
Name PICTO 100 NEWTK New led Verticale ND Nero 4000K flood

## Measurerm.


Code FTS1800077  
Name PICTO 100 NEWTK New led Verticale ND Nero 4000K flood

Luminaire Flux	2928.10 lm	Luminaire Power	35.00 W	Efficacy	83.66 lm/W	Efficiency	100.00%
Lamps Flux	2928.10 lm	Maximum value	1909.63 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	100 mm 80 mm	Height Height	100 mm 0 mm		
Horizontal Luminous Area	0.005027 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.001216 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	20-04-2017			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	2928.10 lm		
LED Flux=3606lm LED Power=31W Eff=81% EfcLed=116lm/W EfcLum=84lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	87 95 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.50	0.74	0.99	1.24	OC	0.25	0.50	0.74	0.99	1.24
OB	0.25	0.50	0.74	0.99	1.24	OD	0.25	0.50	0.74	0.99	1.24

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	5591.60	5017.02	2593.96	1545.00	1022.06	205.04	121.02	79.91	55.05	15.88
OB	5591.60	5017.02	2593.96	1545.00	1022.06	205.04	121.02	79.91	55.05	15.88
OC	5591.60	5017.02	2593.96	1545.00	1022.06	205.04	121.02	79.91	55.05	15.88
OD	5591.60	5017.02	2593.96	1545.00	1022.06	205.04	121.02	79.91	55.05	15.88

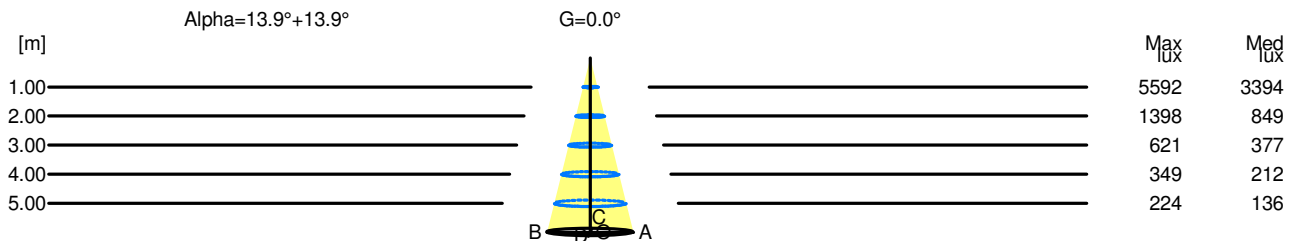

H[m]	D[m]	Max lux	Med lux	Alpha=13.9°+13.9°	G=0.0
1.00	0.50	5592	3394		
2.00	0.99	1398	849		
3.00	1.49	621	377		
4.00	1.98	349	212		
5.00	2.48	224	136		