


Luminaire

Code AD15404
Name PICTO 100 NEWTK New led Orizzontale ND Nero 4000K flood

Measurem.

Code FTS1800101
Name PICTO 100 NEWTK New led Orizzontale ND Nero 4000K flood

Luminaire Flux	2928.10 lm	Luminaire Power	35.00 W	Efficacy	83.66 lm/W	Efficiency	100.00%
Lamps Flux	2928.10 lm	Maximum value	1909.63 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	100 mm 80 mm	Height Height	100 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.005027 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.001216 m2	
Coordinate system Date Measurement Distance		CG 20-04-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 2928.10 lm	
LED Flux=3606lm LED Power=31W Eff=81% EfcLed=116lm/W EfcLum=84lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	87 95 99 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

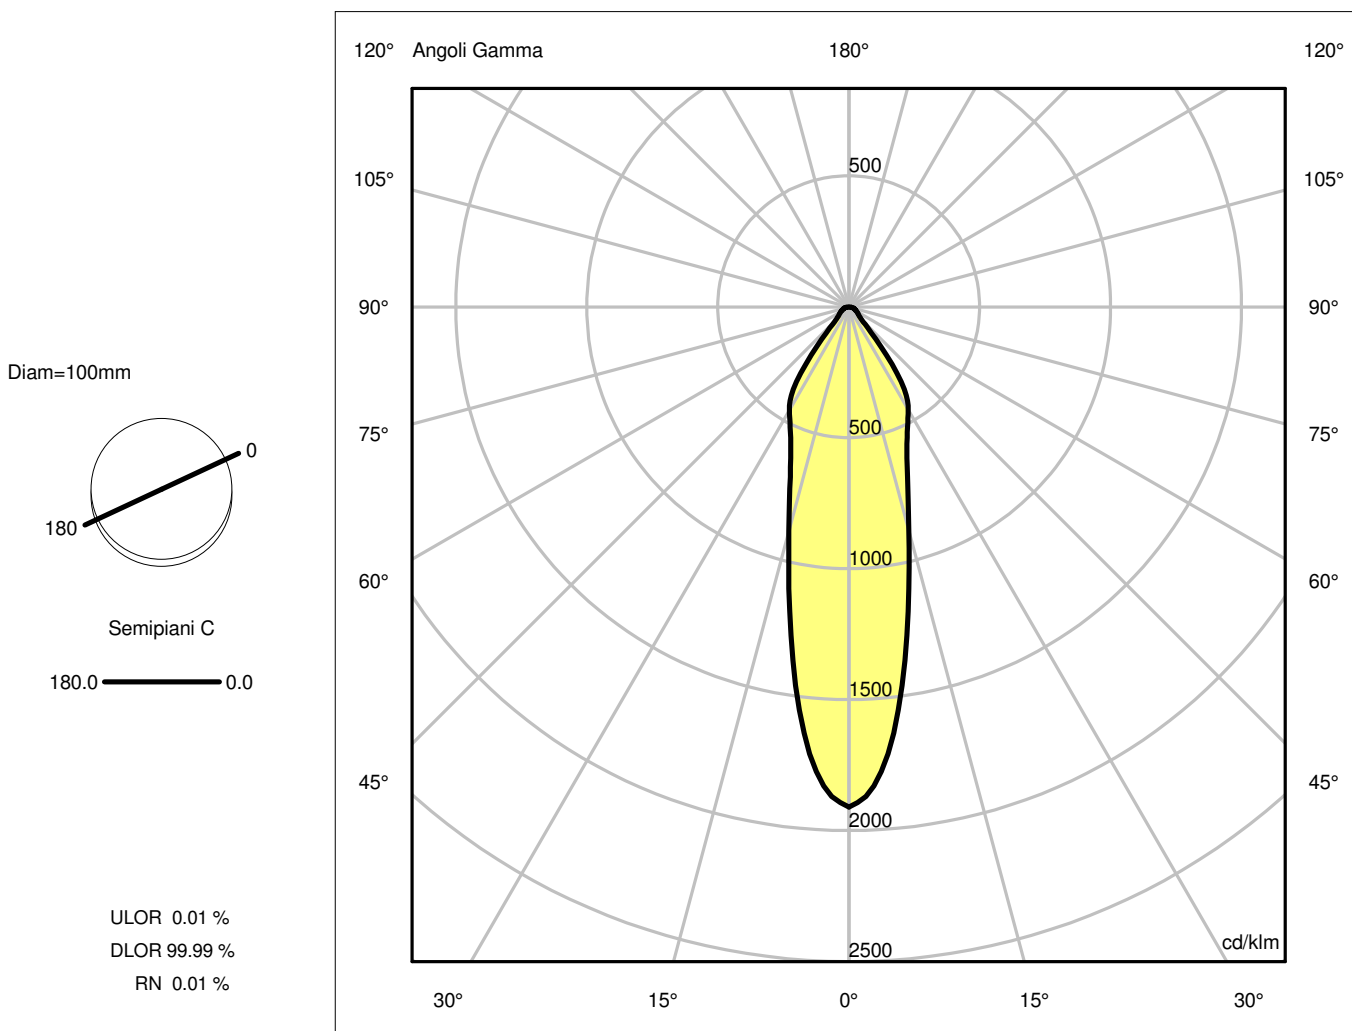

Luminaire

Code AD15404
Name PICTO 100 NEWTK New led Orizzontale ND Nero 4000K flood

Measurerm.


Code FTS1800101
Name PICTO 100 NEWTK New led Orizzontale ND Nero 4000K flood

Luminaire Flux	2928.10 lm	Luminaire Power	35.00 W	Efficacy	83.66 lm/W	Efficiency	100.00%
Lamps Flux	2928.10 lm	Maximum value	1909.63 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	100 mm 80 mm	Height Height	100 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.005027 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.001216 m2	
Coordinate system Date Measurement Distance		CG 20-04-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 2928.10 lm	
LED Flux=3606lm LED Power=31W Eff=81% EfcLed=116lm/W EfcLum=84lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	87 95 99 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.50	0.74	0.99	1.24	OC	0.25	0.50	0.74	0.99	1.24
OB	0.25	0.50	0.74	0.99	1.24	OD	0.25	0.50	0.74	0.99	1.24

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	5591.60	5017.02	2593.96	1545.00	1022.06	205.04	121.02	79.91	55.05	15.88
OB	5591.60	5017.02	2593.96	1545.00	1022.06	205.04	121.02	79.91	55.05	15.88
OC	5591.60	5017.02	2593.96	1545.00	1022.06	205.04	121.02	79.91	55.05	15.88
OD	5591.60	5017.02	2593.96	1545.00	1022.06	205.04	121.02	79.91	55.05	15.88

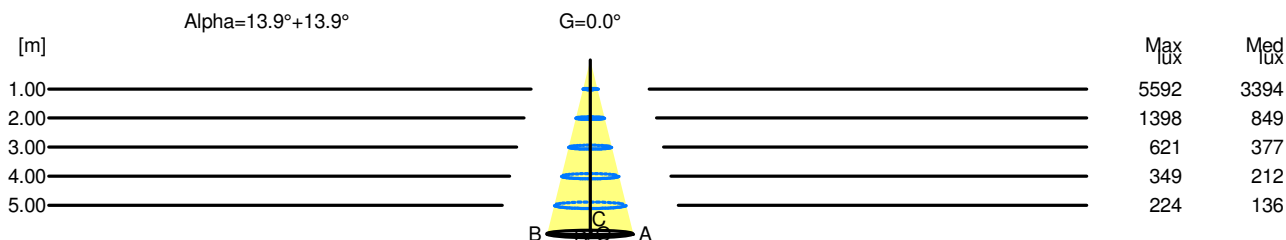

H[m]	D[m]	Max lux	Med lux	Alpha=13.9°+13.9°	G=0.0
1.00	0.50	5592	3394		
2.00	0.99	1398	849		
3.00	1.49	621	377		
4.00	1.98	349	212		
5.00	2.48	224	136		