

Luminaire

Code M2882W00+M196900
 Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K NON DIMMERABILE 1184MM+OTTICA PRISMOPTIC 1184MM PER LED

Measurem.

Code FTS1601401
 Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K NON DIMMERABILE 1184MM+OTTICA PRISMOPTIC 1184MM PER LED

Luminaire Flux	2527 lm	Luminaire Power	34.0 W	Efficacy	74.327 lm/W	Efficiency	100.00%
Source Flux	2527 lm	Maximum value	470.35 cd/klm	Position	C=90.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1185 mm	Width	45 mm	Height	110 mm
Rectangular Luminous Area		Length	1185 mm	Width	32 mm	Height	0 mm
Horizontal Luminous Area		0.037920 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.009174 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		24-06-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2527 lm	


LED Flux=4357,13lm LED Power=27W Eff=58% EfcLed=161lm/W EfcLum=74lm/W Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 57 86 97 99 100
 F UTE 0.99 D + 0.01 T

D DIN 5040
 B NBN

A41
 BZ 3


1185mm x 45mm



Semipiani C

180.0 ——— 0.0
 270.0 ——— 90.0

ULOR 0.65 %
 DLOR 99.35 %
 RN 0.65 %

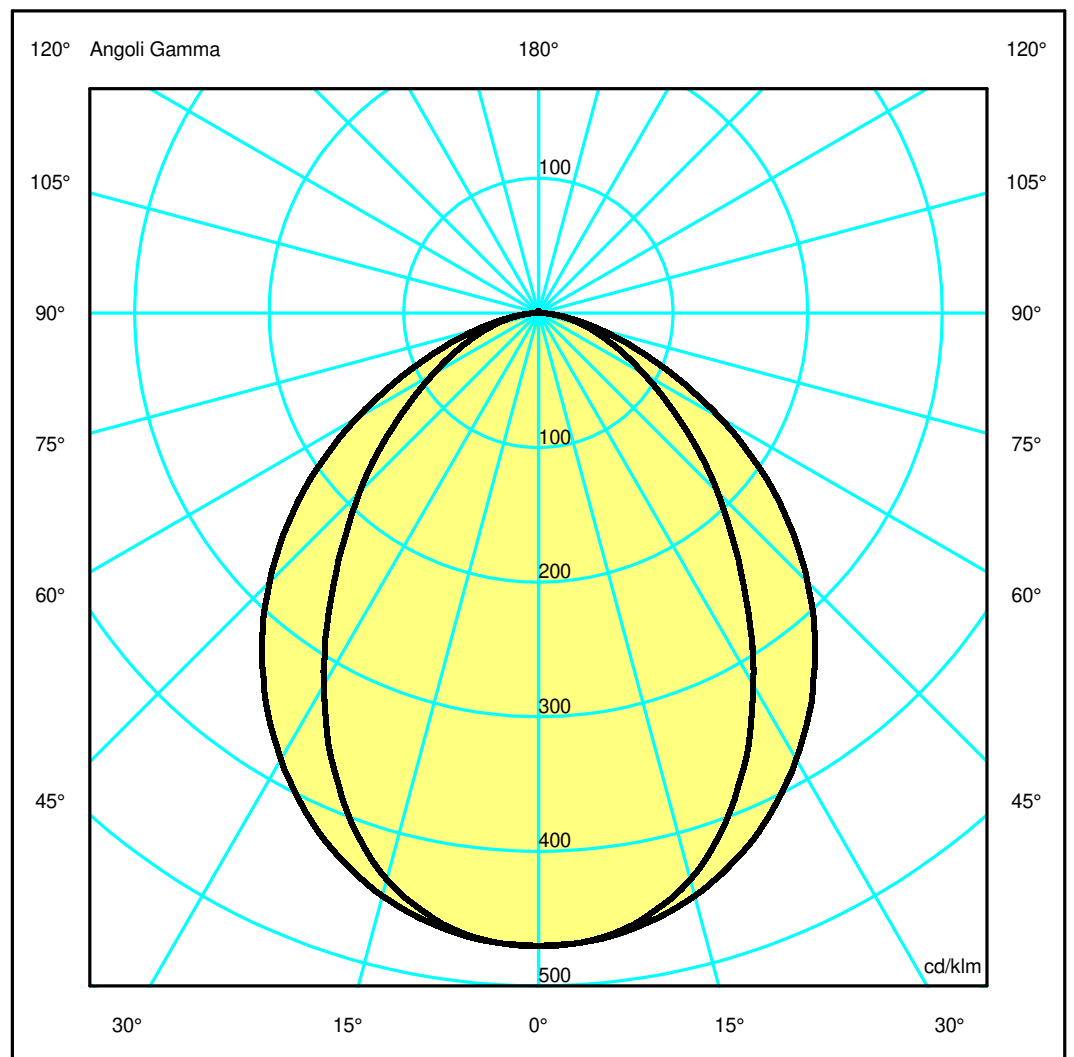

Luminaire

Code M2882W00+M196900
 Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K NON DIMMERABILE 1184MM+OTTICA PRISMOPTIC 1184MM PER LED

Measurement

Code FTS1601401
 Name ALGORITMO SYSTEM PIASTRA CABLATA DIRETTA LED 3000K NON DIMMERABILE 1184MM+OTTICA PRISMOPTIC 1184MM PER LED

Luminaire Flux	2527 lm	Luminaire Power	34.0 W	Efficacy	74.327 lm/W	Efficiency	100.00%
Source Flux	2527 lm	Maximum value	470.35 cd/klm	Position	C=90.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1185 mm	Width	45 mm	Height	110 mm
Rectangular Luminous Area		Length	1185 mm	Width	32 mm	Height	0 mm
Horizontal Luminous Area		0.037920 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.009174 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		24-06-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2527 lm	


LED Flux=4357,13lm LED Power=27W Eff=58% EfcLed=161lm/W EfcLum=74lm/W Ra=80 SDCM=3 L70(6K)=50000h

C.I.E.	57 86 97 99 100	D DIN 5040	A41
F UTE	0.99 D + 0.01 T	B NBN	BZ 3

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.81	1.63	2.44	3.25	4.07	OC	1.23	2.46	3.69	4.93	6.16
OB	0.81	1.63	2.44	3.25	4.07	OD	1.23	2.46	3.69	4.93	6.16

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1187.88	1181.44	1101.30	922.23	687.10	475.42	297.03	173.05	86.91	24.46
OB	1187.88	1181.44	1101.30	922.23	687.10	475.42	297.03	173.05	86.91	24.46
OC	1187.88	1182.67	1132.70	1034.38	893.21	714.26	505.23	286.44	121.65	27.42
OD	1187.88	1182.67	1132.70	1034.38	893.21	714.26	505.23	286.44	121.65	27.42

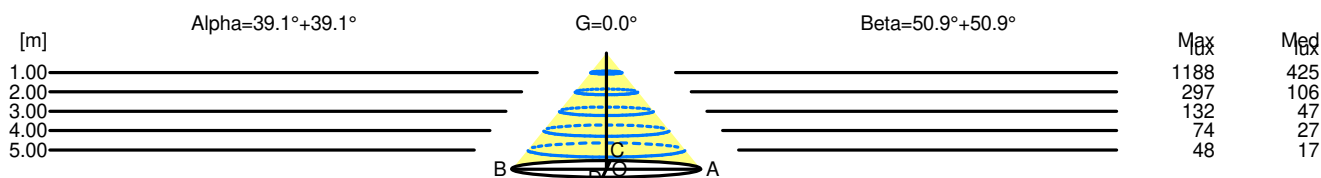

H[m]	D[m]	Max lux	Med lux	Alpha=39.1°+39.1°	G=0.0
1.00	1.63	1188	425		
2.00	3.25	297	106		
3.00	4.88	132	47		
4.00	6.51	74	27		
5.00	8.13	48	17		

H[m]	D[m]	Max lux	Med lux	Beta=50.9°+50.9°	G=0.0
1.00	2.46	1188	425		
2.00	4.93	297	106		
3.00	7.39	132	47		
4.00	9.85	74	27		
5.00	12.31	48	17		