

## Luminaire

Code 2001010APP  
 Name DISCOVERY SPACE 90X90 S RGBW APP COMP

## Measurerm.

Code FTS2000467-B  
 Name DISCOVERY SPACE 90X90 S RGBW APP COMP


Luminaire Flux	1708 lm	Luminaire Power	36.0 W	Efficacy	47.444 lm/W	Efficiency	100.00%
Source Flux	1708 lm	Maximum value	149.59 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	970 mm	Width	970 mm	Height	17 mm
Rectangular Luminous Area		Length	900 mm	Width	900 mm	Height	10 mm
Horizontal Luminous Area		0.810000 m2		Emitting area on Plane 180°	0.009000 m2		
Emitting area on Plane 0°		0.009000 m2		Emitting area on Plane 270°	0.009000 m2		
Emitting area on Plane 90°		0.009000 m2		Glare area at 76°	0.204689 m2		
Coordinate system		CG		Symmetry Type	Double Symmetrical		
Date		14-10-2022		Maximum Gamma Angle	180		
Measurement Distance		0.00		Measurement Flux	1708 lm		

LED Flux=3119lm LED Power=31W Eff=55% EfcLed=101lm/W EfcLum=47lm/W CCT=3880K Ra=80 SDCM=5 L70(6K)=60000h


C.I.E. 41 72 92 50 100  
 F UTE 0.50 G + 0.50 T

D DIN 5040  
 B NBN

C31  
 BZ 5

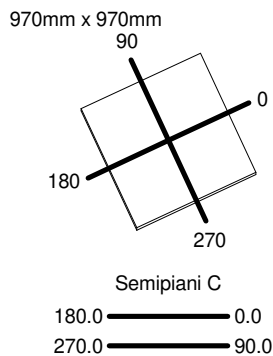

ULOR 50.05 %  
 DLOR 49.95 %  
 RN 50.05 %

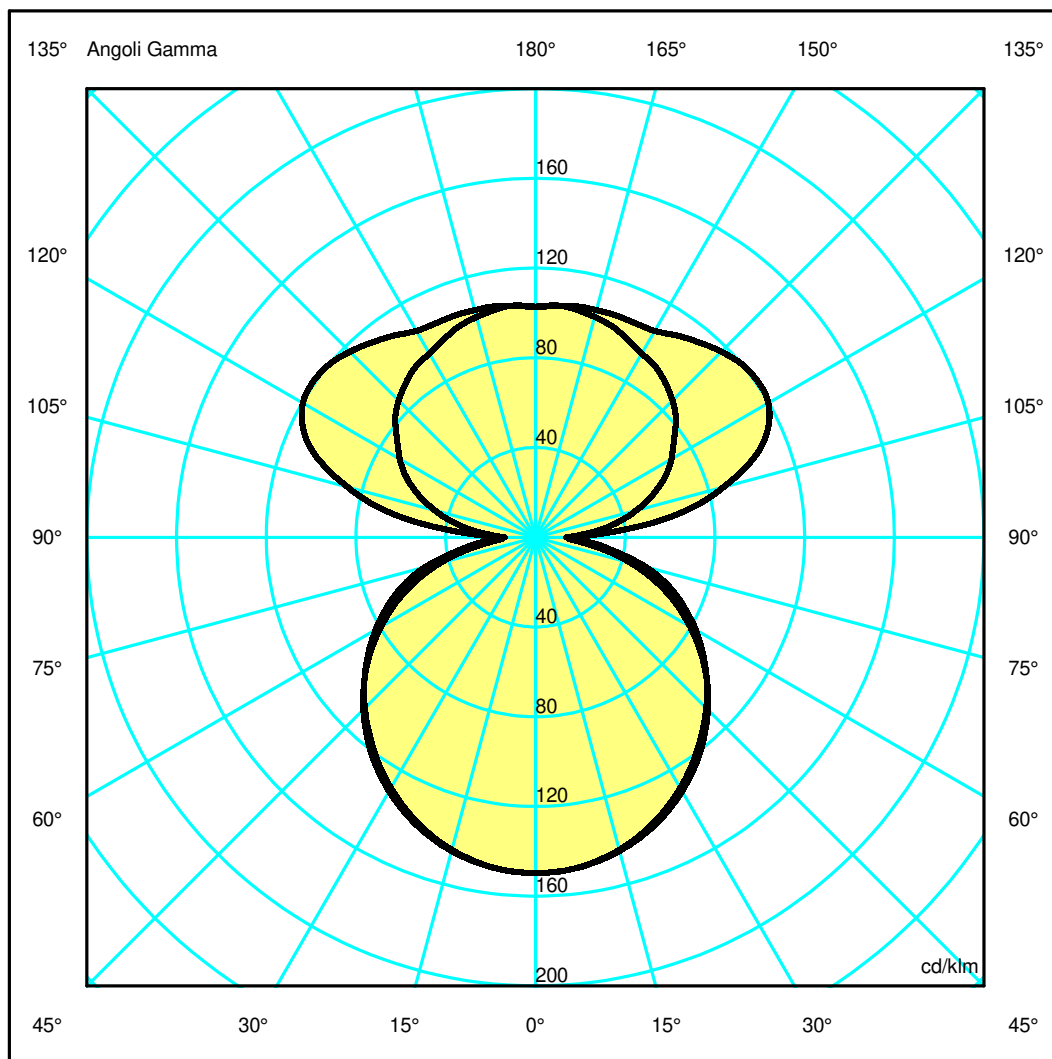

## Luminaire

Code 2001010APP  
Name DISCOVERY SPACE 90X90 S RGBW APP COMP

## Measurment

Code FTS2000467-B  
Name DISCOVERY SPACE 90X90 S RGBW APP COMP

Luminaire Flux	1708 lm	Luminaire Power	36.0 W	Efficacy	47.444 lm/W	Efficiency	100.00%
Source Flux	1708 lm	Maximum value	149.59 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	970 mm	Width	970 mm	Height	17 mm
Rectangular Luminous Area		Length	900 mm	Width	900 mm	Height	10 mm
Horizontal Luminous Area		0.810000 m2		Emitting area on Plane 180°		0.009000 m2	
Emitting area on Plane 0°		0.009000 m2		Emitting area on Plane 270°		0.009000 m2	
Emitting area on Plane 90°		0.009000 m2		Glare area at 76°		0.204689 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		14-10-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1708 lm	


LED Flux=3119lm LED Power=31W Eff=55% EfcLed=101lm/W EfcLum=47lm/W CCT=3880K Ra=80 SDCM=5 L70(6K)=60000h

C.I.E.	41 72 92 50 100	D DIN 5040	C31
F UTE	0.50 G + 0.50 T	B NBN	BZ 5

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	2.05	4.11	6.16	8.21	10.27	OC	1.90	3.79	5.69	7.58	9.48
OB	2.05	4.11	6.16	8.21	10.27	OD	1.90	3.79	5.69	7.58	9.48

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	255.49	254.60	246.28	230.43	208.91	183.82	155.74	124.58	86.90	40.97
OB	255.49	254.60	246.28	230.43	208.91	183.82	155.74	124.58	86.90	40.97
OC	255.49	254.69	247.20	232.83	212.10	185.50	153.80	117.14	75.12	31.50
OD	255.49	254.69	247.20	232.83	212.10	185.50	153.80	117.14	75.12	31.50

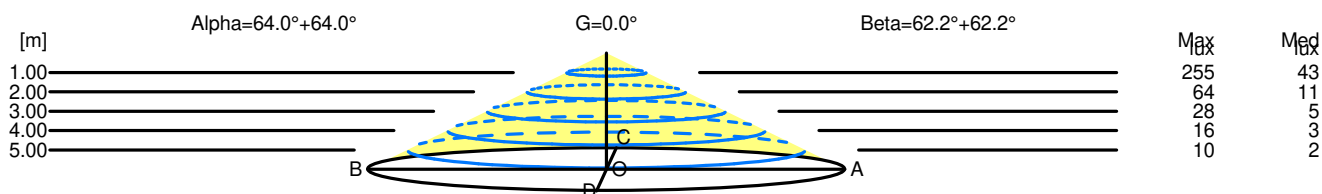

H[m]	D[m]	Max lux	Med lux	Alpha=64.0°+64.0°	G=0.0
1.00	4.11	255	43		
2.00	8.21	64	11		
3.00	12.32	28	5		
4.00	16.43	16	3		
5.00	20.53	10	2		

H[m]	D[m]	Max lux	Med lux	Beta=62.2°+62.2°	G=0.0
1.00	3.79	255	43		
2.00	7.58	64	11		
3.00	11.37	28	5		
4.00	15.16	16	3		
5.00	18.95	10	2		