


## Luminaire

Code 2001030APP\_W  
Name DISCOVERY SPACE 90X90 S RGBW APP COMP NR - WHITE


## Measurement

Code FTS2000465-B  
Name DISCOVERY SPACE 90X90 S RGBW APP COMP NR - WHITE

Luminaire Flux	1087 lm	Luminaire Power	17.0 W	Efficacy	63.941 lm/W	Efficiency	100.00%
Source Flux	1087 lm	Maximum value	149.04 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	970 mm	Width	970 mm	Height	17 mm
Rectangular Luminous Area		Length	900 mm	Width	900 mm	Height	10 mm
Horizontal Luminous Area		0.810000 m <sup>2</sup>		Emitting area on Plane 180°		0.009000 m <sup>2</sup>	
Emitting area on Plane 0°		0.009000 m <sup>2</sup>		Emitting area on Plane 270°		0.009000 m <sup>2</sup>	
Emitting area on Plane 90°		0.009000 m <sup>2</sup>		Glare area at 76°		0.204689 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		14-10-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1087 lm	
LED Flux=2015lm LED Power=13W Eff=54% EfcLed=159lm/W EfcLum=63lm/W CCT=3000K Ra=80 SDCM=5 L70(6K)=60000h							
C.I.E.	41 72 92 50 100			D DIN 5040		C31	
F UTE	0.50 G + 0.50 T			B NBN		BZ 5	

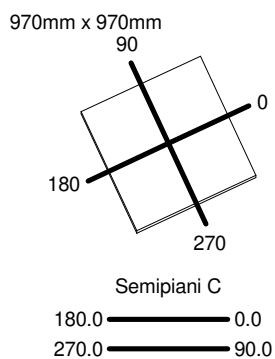

ULOR 50.14 %  
DLOR 49.86 %  
RN 50.14 %

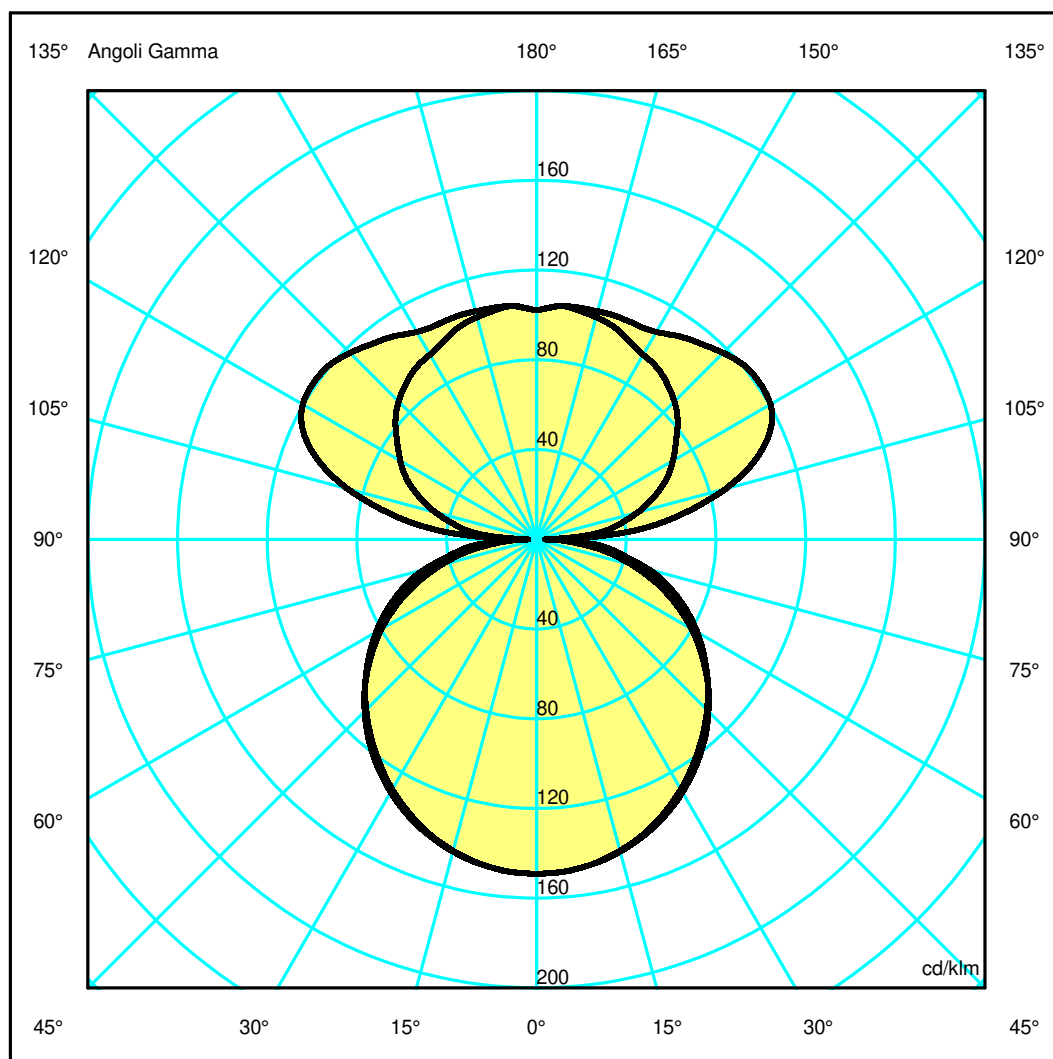

## Luminaire

Code 2001030APP\_W  
Name DISCOVERY SPACE 90X90 S RGBW APP COMP NR - WHITE

## Measurerm.

Code FTS2000465-B  
Name DISCOVERY SPACE 90X90 S RGBW APP COMP NR - WHITE

Luminaire Flux	1087 lm	Luminaire Power	17.0 W	Efficacy	63.941 lm/W	Efficiency	100.00%
Source Flux	1087 lm	Maximum value	149.04 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	970 mm	Width	970 mm	Height	17 mm
Rectangular Luminous Area		Length	900 mm	Width	900 mm	Height	10 mm
Horizontal Luminous Area		0.810000 m2		Emitting area on Plane 180°		0.009000 m2	
Emitting area on Plane 0°		0.009000 m2		Emitting area on Plane 270°		0.009000 m2	
Emitting area on Plane 90°		0.009000 m2		Glare area at 76°		0.204689 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		14-10-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1087 lm	


LED Flux=2015lm LED Power=13W Eff=54% EfcLed=159lm/W EfcLum=63lm/W CCT=3000K Ra=80 SDCM=5 L70(6K)=60000h

C.I.E.	41 72 92 50 100	D DIN 5040	C31
F UTE	0.50 G + 0.50 T	B NBN	BZ 5

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	2.08	4.17	6.25	8.33	10.42	OC	1.91	3.82	5.74	7.65	9.56
OB	2.08	4.17	6.25	8.33	10.42	OD	1.91	3.82	5.74	7.65	9.56

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	162.00	161.49	156.25	146.26	132.55	116.81	99.24	79.66	56.33	28.96
OB	162.00	161.49	156.25	146.26	132.55	116.81	99.24	79.66	56.33	28.96
OC	162.00	161.40	156.61	147.58	134.39	117.84	97.70	74.58	47.96	19.00
OD	162.00	161.40	156.61	147.58	134.39	117.84	97.70	74.58	47.96	19.00

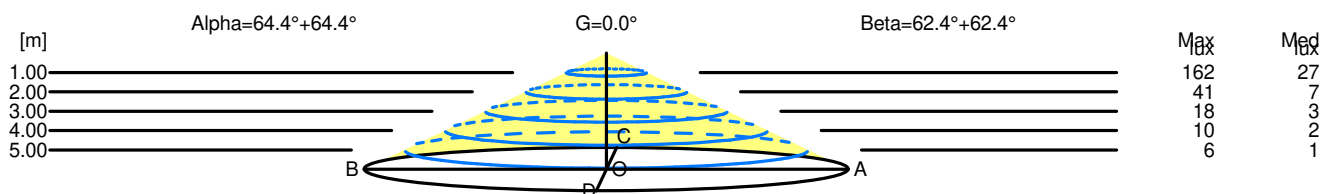

H[m]	D[m]	Max lux	Med lux	Alpha=64.4°+64.4°	G=0.0
1.00	4.17	162	27		
2.00	8.33	41	7		
3.00	12.50	18	3		
4.00	16.67	10	2		
5.00	20.84	6	1		

H[m]	D[m]	Max lux	Med lux	Beta=62.4°+62.4°	G=0.0
1.00	3.82	162	27		
2.00	7.65	41	7		
3.00	11.47	18	3		
4.00	15.30	10	2		
5.00	19.12	6	1		