

Luminaire

Code AZ11221
 Name EGG.BAFFLE 80x40 C/S SHARP D 30K B

Measurem.

Code FTS2000182
 Name EGG.BAFFLE 80x40 C/S SHARP D 30K B


Luminaire Flux	667.12 lm	Luminaire Power	11.00 W	Efficacy	60.65 lm/W	Efficiency	100.00%
Lamps Flux	667.12 lm	Maximum value	1120.76 cd/klm	Position	C=35.00 G=16.00	CG	Double Symmetrical
Rectangular Luminaire		Length	800 mm	Width	50 mm	Height	400 mm
Rectangular Luminous Area		Length	720 mm	Width	10 mm	Height	0 mm
Horizontal Luminous Area	0.007200 m2			Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°			0.001742 m2
Coordinate system	CG			Symmetry Type			Double Symmetrical
Date	07-05-2019			Maximum Gamma Angle			180
Measurement Distance	0.00			Measurement Flux			667.12 lm

LED Flux=940lm LED Power=7.5W Eff=71% EfcLed=125lm/W EfcLum=61lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=60000h

C.I.E. 94 100 100 100 100
 F UTE 1.00 A

D DIN 5040
 B NBN

A60
 BZ 1

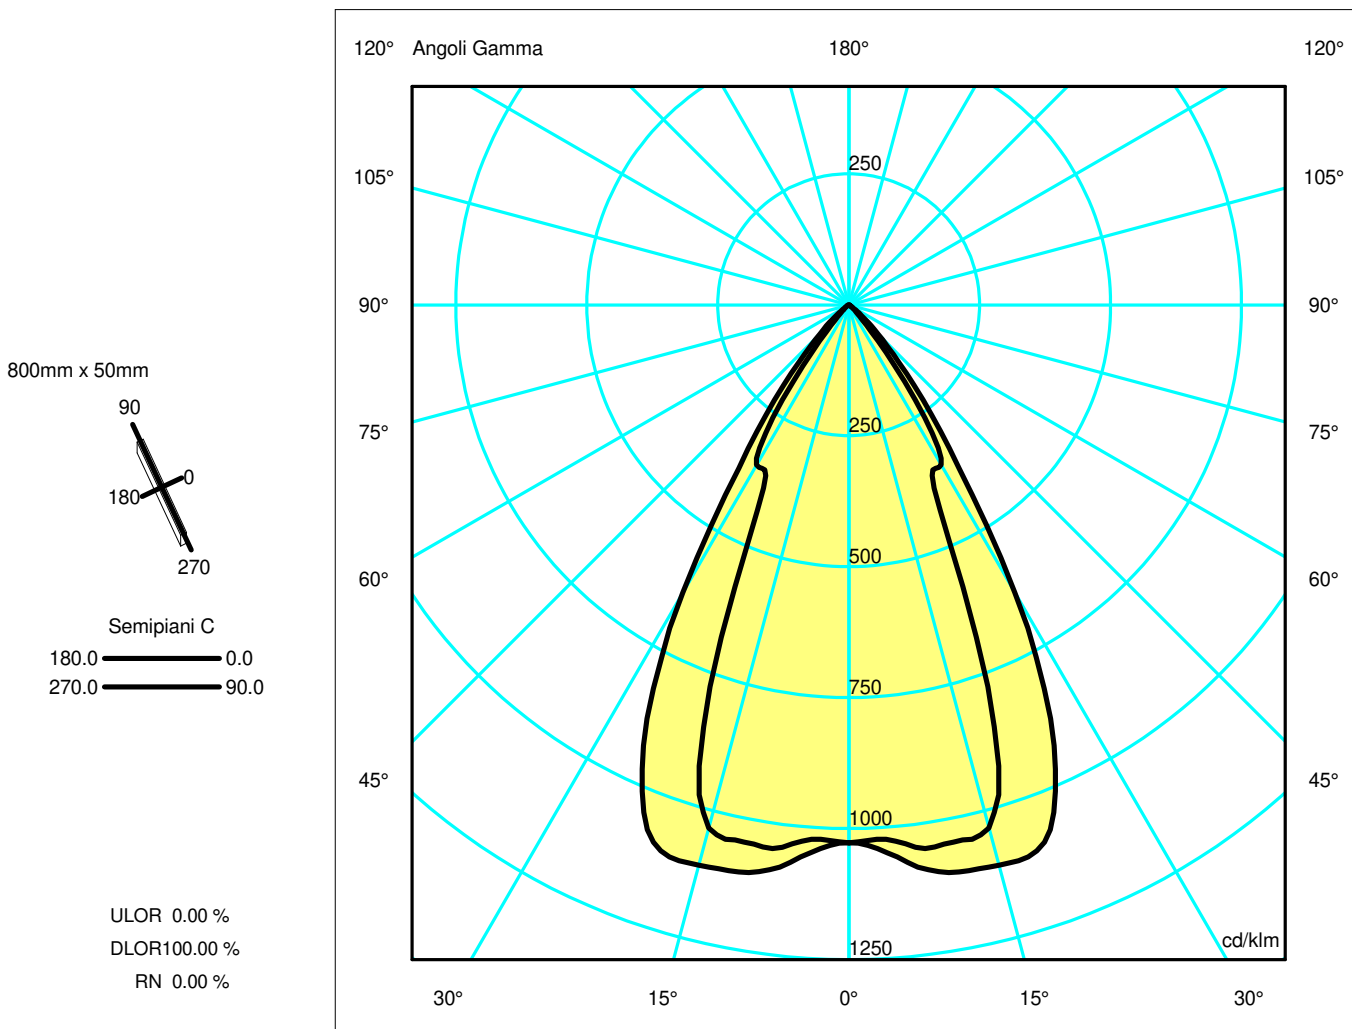

Luminaire

Code AZ11221
Name EGG.BAFFLE 80x40 C/S SHARP D 30K B

Measurerm.

Code FTS2000182
Name EGG.BAFFLE 80x40 C/S SHARP D 30K B

Luminaire Flux	667.12 lm	Luminaire Power	11.00 W	Efficacy	60.65 lm/W	Efficiency	100.00%
Lamps Flux	667.12 lm	Maximum value	1120.76 cd/klm	Position	C=35.00 G=16.00	CG	Double Symmetrical
Rectangular Luminaire		Length	800 mm	Width	50 mm	Height	400 mm
Rectangular Luminous Area		Length	720 mm	Width	10 mm	Height	0 mm
Horizontal Luminous Area		0.007200 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001742 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		07-05-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		667.12 lm	


LED Flux=940lm LED Power=7.5W Eff=71% EfcLed=125lm/W EfcLum=61lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=60000h

C.I.E.	94 100 100 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.60	1.21	1.81	2.42	3.02	OC	0.41	0.82	1.23	1.64	2.05
OB	0.60	1.21	1.81	2.42	3.02	OD	0.41	0.82	1.23	1.64	2.05

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	684.89	705.81	738.65	619.02	223.30	52.46	7.88	1.30	0.52	0.11
OB	684.89	705.81	738.65	619.02	223.30	52.46	7.88	1.30	0.52	0.11
OC	684.89	685.56	689.62	257.31	147.73	13.73	3.08	1.04	0.61	0.12
OD	684.89	685.56	689.62	257.31	147.73	13.73	3.08	1.04	0.61	0.12

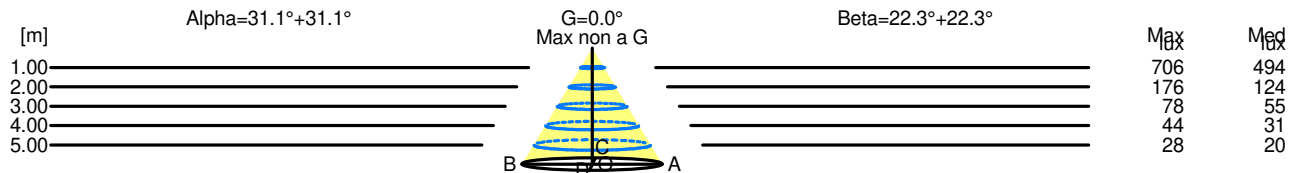

H[m]	D[m]	Max lux	Med lux	Alpha=31.1°+31.1°	G=0.0 Max non a G
1.00	1.21	706	494		
2.00	2.42	176	124		
3.00	3.62	78	55		
4.00	4.83	44	31		
5.00	6.04	28	20		

H[m]	D[m]	Max lux	Med lux	Beta=22.3°+22.3°	G=0.0 Max non a G
1.00	0.82	706	494		
2.00	1.64	176	124		
3.00	2.46	78	55		
4.00	3.28	44	31		
5.00	4.10	28	20		