

## Luminaire

Code M323540  
Name EVERY 150 RD TR FI LED 2700 2X30°NO/NE

## Measurum.

Code FTS1602590-A  
Name EVERY 150 RD TR FI LED 2700 2X30°NO/NE

Luminaire Flux	1626 lm	Luminaire Power	20.0 W	Efficacy	81.300 lm/W	Efficiency	100.00%
Source Flux	1626 lm	Maximum value	1109.04 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	136 mm	Height	138 mm		
Round Luminous Area		Diam.	121 mm	Height	0 mm		
Horizontal Luminous Area		0.011499 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002782 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1626 lm	
LED Flux=2979lm LED Power=20W Eff=55% EfcLed=149lm/W EfcLum=81lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	95 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Diam=136mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

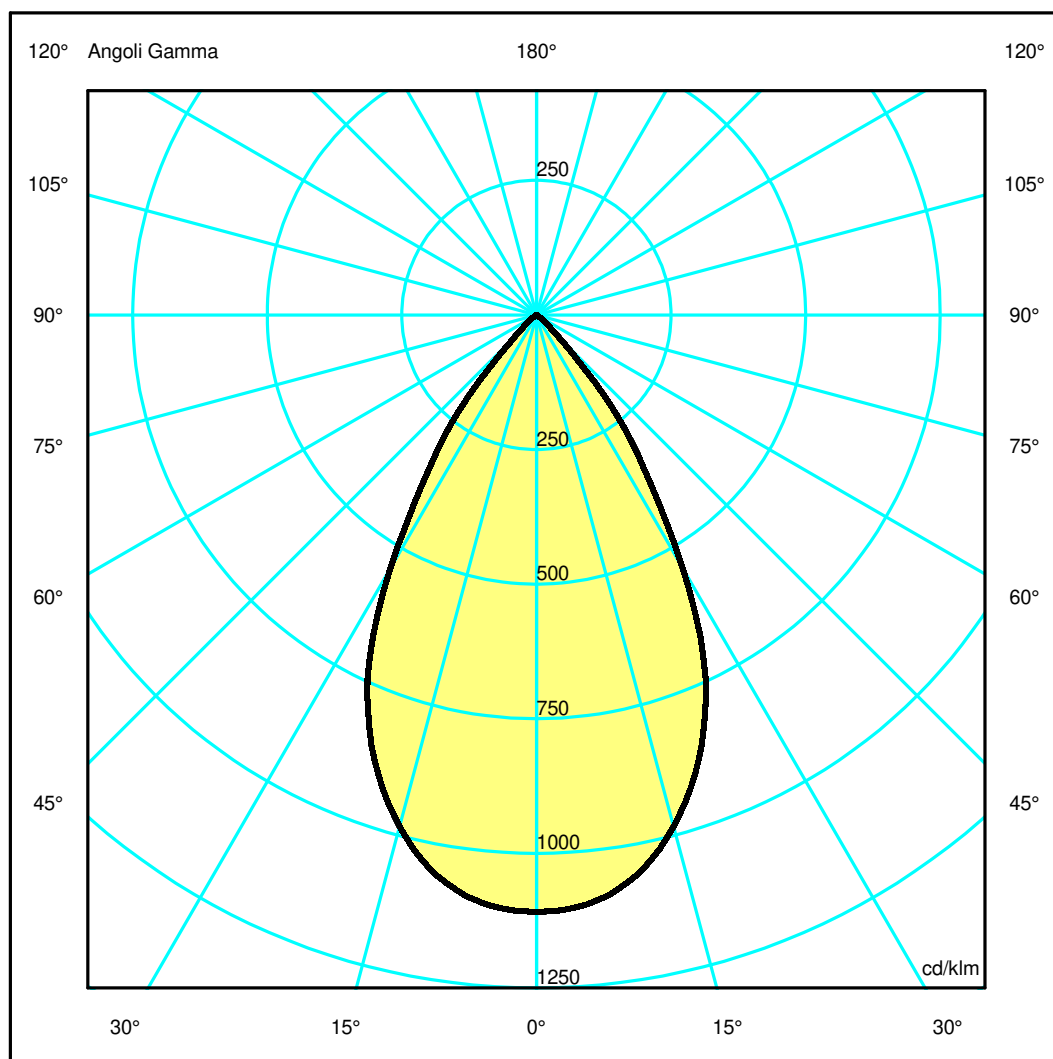

## Luminaire

Code M323540  
Name EVERY 150 RD TR FI LED 2700 2X30°NO/NE

## Measurerm.


Code FTS1602590-A  
Name EVERY 150 RD TR FI LED 2700 2X30°NO/NE

Luminaire Flux	1626 lm	Luminaire Power	20.0 W	Efficacy	81.300 lm/W	Efficiency	100.00%
Source Flux	1626 lm	Maximum value	1109.04 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	136 mm	Height	138 mm		
Round Luminous Area		Diam.	121 mm	Height	0 mm		
Horizontal Luminous Area		0.011499 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002782 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1626 lm	
LED Flux=2979lm LED Power=20W Eff=55% EfcLed=149lm/W EfcLum=81lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	95 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.57	1.14	1.71	2.29	2.86	OC	0.57	1.14	1.71	2.29	2.86
OB	0.57	1.14	1.71	2.29	2.86	OD	0.57	1.14	1.71	2.29	2.86

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1803.29	1785.30	1598.92	1208.69	566.97	95.98	11.50	2.14	0.90	0.46
OB	1803.29	1785.30	1598.92	1208.69	566.97	95.98	11.50	2.14	0.90	0.46
OC	1803.29	1785.30	1598.92	1208.69	566.97	95.98	11.50	2.14	0.90	0.46
OD	1803.29	1785.30	1598.92	1208.69	566.97	95.98	11.50	2.14	0.90	0.46

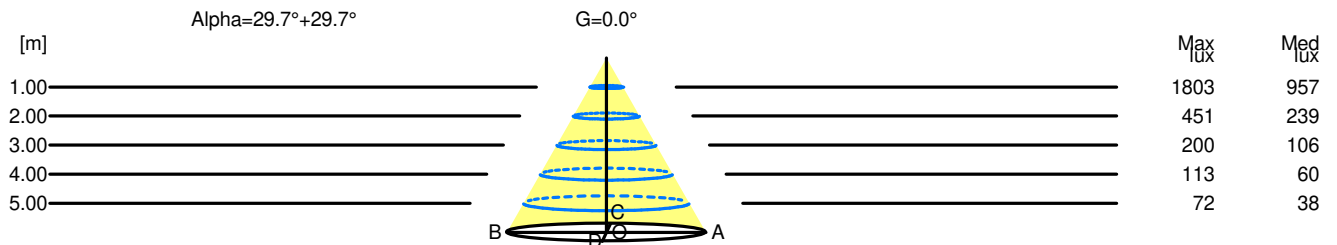

H[m]	D[m]	Max lux	Med lux	Alpha=29.7°+29.7°	G=0.0
1.00	1.14	1803	957		
2.00	2.29	451	239		
3.00	3.43	200	106		
4.00	4.57	113	60		
5.00	5.71	72	38		