


Luminaire

Code BM11104
Name HOY SPOT PLAF ORIENT 4000K FL DALI NRO

Measur.

Code FTS2000300
Name HOY SPOT PLAF ORIENT 4000K FL DALI NRO

Luminaire Flux	2036.94 lm	Luminaire Power	22.00 W	Efficacy	92.59 lm/W	Efficiency	100.00%
Lamps Flux	2036.94 lm	Maximum value	3096.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	90 mm 69 mm	Height Height	188 mm 0 mm		
Horizontal Luminous Area	0.003739 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.000905 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	22-11-2019			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	2036.94 lm		
LED Flux=2608.5lm LED Power=19W Eff=78% EfcLed=137lm/W EfcLum=93lm/W CCT=4000K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	98 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

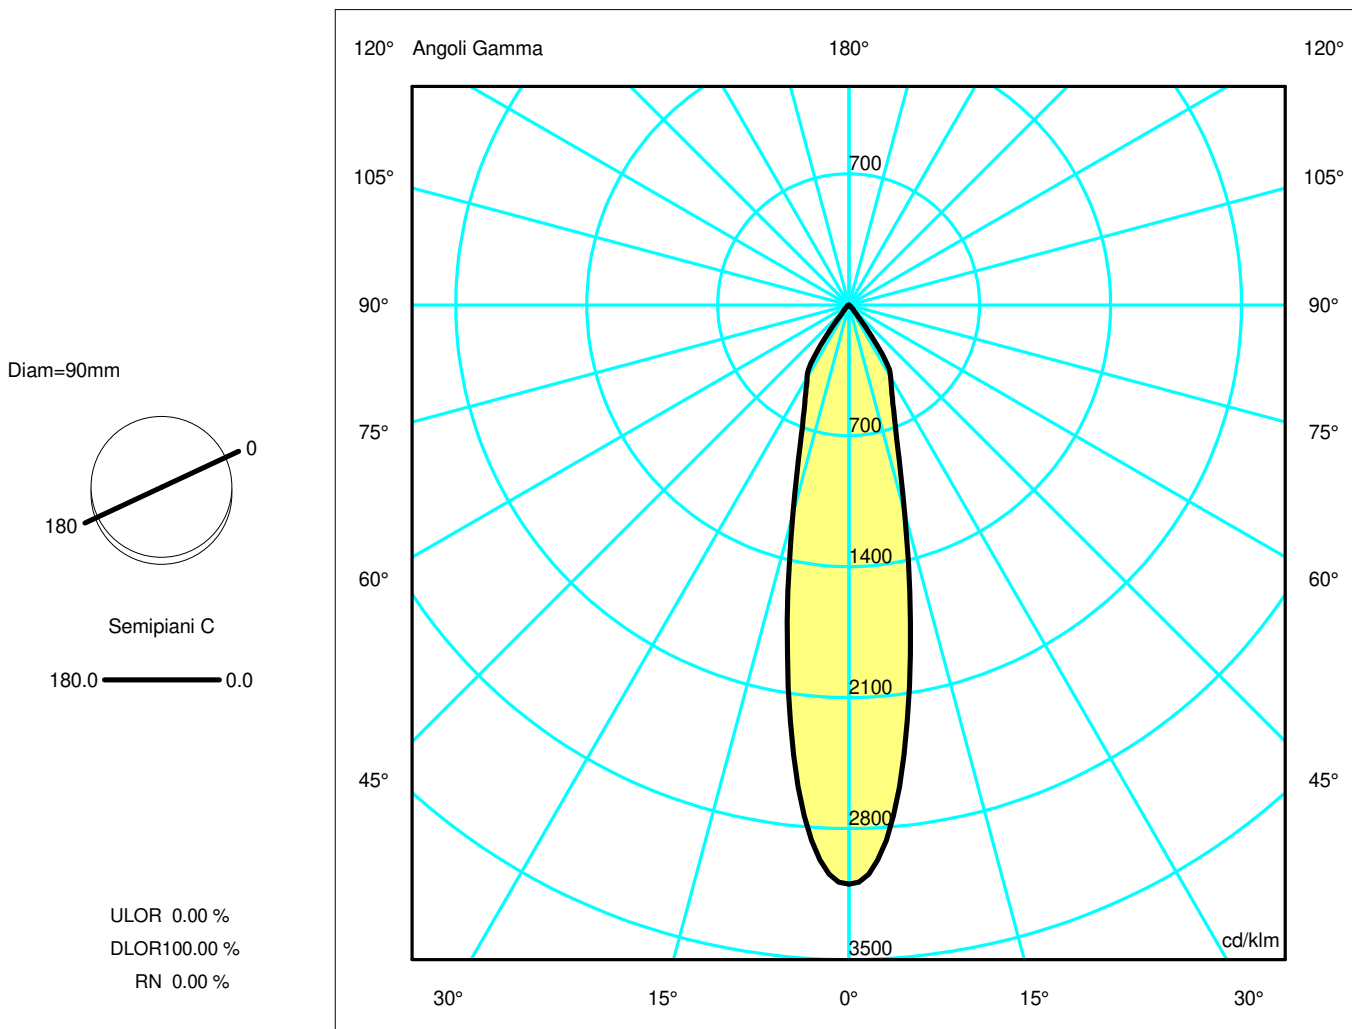

Luminaire

Code BM11104
Name HOY SPOT PLAF ORIENT 4000K FL DALI NRO

Measur.


Code FTS2000300
Name HOY SPOT PLAF ORIENT 4000K FL DALI NRO

Luminaire Flux	2036.94 lm	Luminaire Power	22.00 W	Efficacy	92.59 lm/W	Efficiency	100.00%
Lamps Flux	2036.94 lm	Maximum value	3096.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	90 mm 69 mm	Height Height	188 mm 0 mm		
Horizontal Luminous Area		0.003739 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000905 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		22-11-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2036.94 lm	
LED Flux=2608.5lm LED Power=19W Eff=78% EfcLed=137lm/W EfcLum=93lm/W CCT=4000K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.43	0.64	0.86	1.07	OC	0.21	0.43	0.64	0.86	1.07
OB	0.21	0.43	0.64	0.86	1.07	OD	0.21	0.43	0.64	0.86	1.07

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6306.66	5580.23	2351.30	1122.61	539.17	48.67	11.60	5.66	1.66	0.46
OB	6306.66	5580.23	2351.30	1122.61	539.17	48.67	11.60	5.66	1.66	0.46
OC	6306.66	5580.23	2351.30	1122.61	539.17	48.67	11.60	5.66	1.66	0.46
OD	6306.66	5580.23	2351.30	1122.61	539.17	48.67	11.60	5.66	1.66	0.46

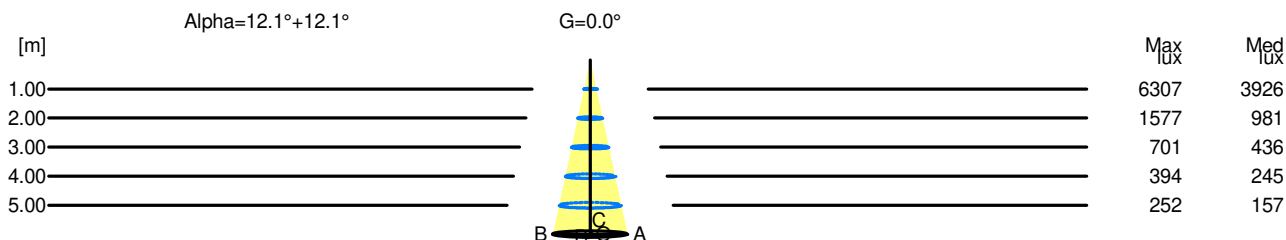

H[m]	D[m]	Max lux	Med lux	Alpha=12.1°+12.1°	G=0.0
1.00	0.43	6307	3926		
2.00	0.86	1577	981		
3.00	1.29	701	436		
4.00	1.72	394	245		
5.00	2.15	252	157		