


Luminaire

Code BM23004
Name HOY SPOT BIN 2700K XF DALI NRO OTK

Measurem.

Code FTS2000673
Name HOY SPOT BIN 2700K XF DALI NRO OTK

Luminaire Flux	1795.78 lm	Luminaire Power	22.00 W	Efficacy	81.63 lm/W	Efficiency	100.00%
Lamps Flux	1795.78 lm	Maximum value	891.23 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 90 mm Diam. 69 mm	Height	188 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.003739 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°			0.000000 m2 0.000000 m2 0.000905 m2		
Coordinate system Date Measurement Distance	CG 14-11-2019 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux			Rotosymmetrical 180 1795.78 lm		
LED Flux=2267.4lm LED Power=19W Eff=79% EfcLed=119lm/W EfcLum=82lm/W CCT=2700K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E. F UTE	79 95 100 100 100 1.00 B	D DIN 5040 B NBN			A60 BZ 1		

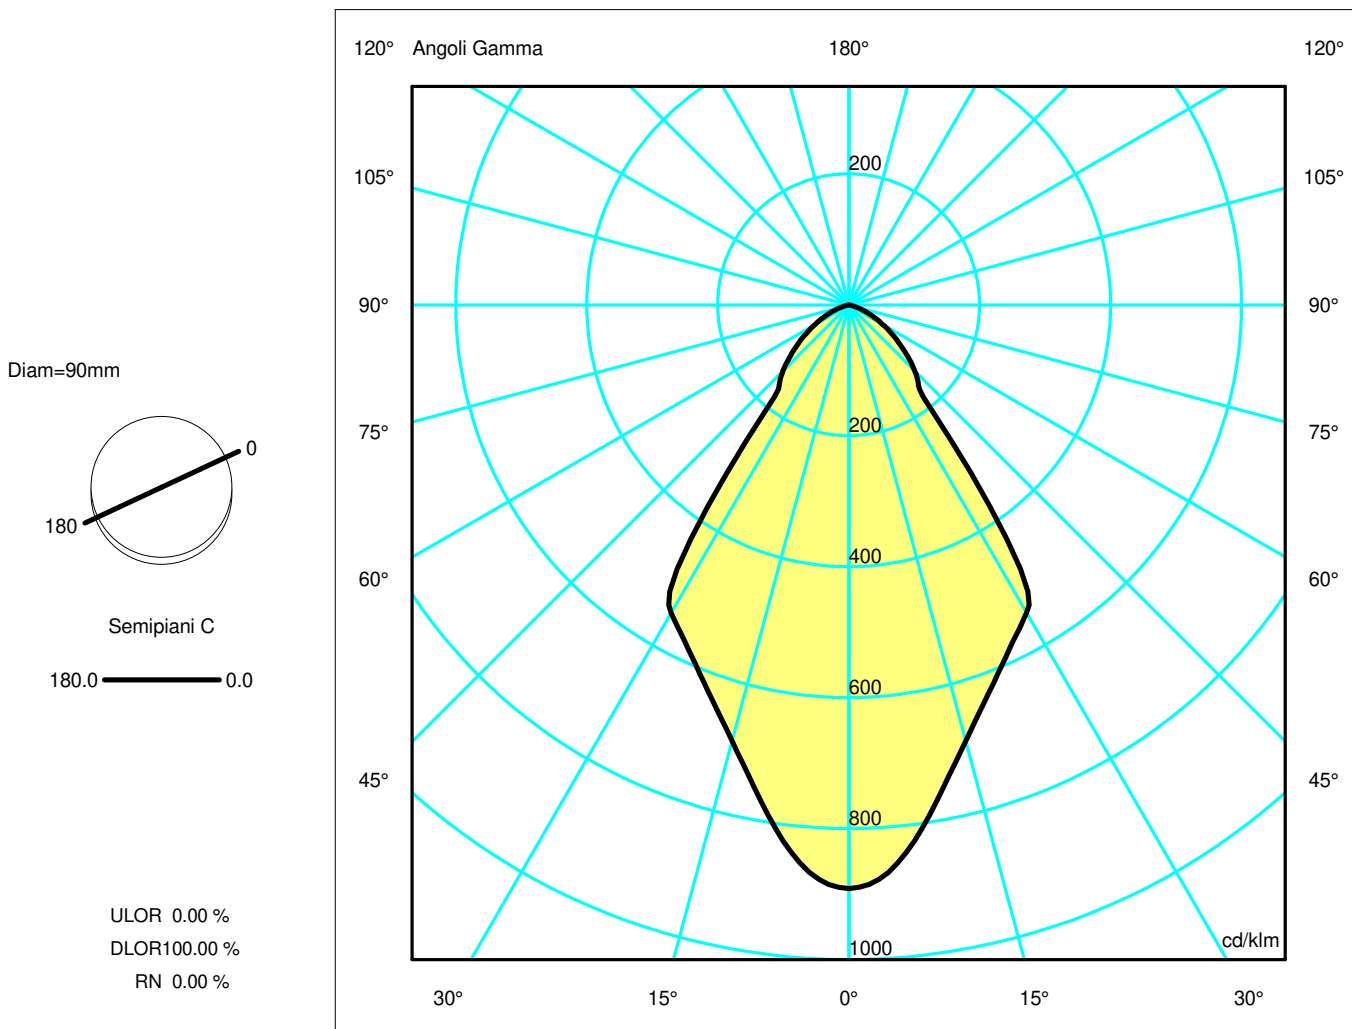

Luminaire

Code BM23004
Name HOY SPOT BIN 2700K XF DALI NRO OTK

Measur.


Code FTS2000673
Name HOY SPOT BIN 2700K XF DALI NRO OTK

Luminaire Flux	1795.78 lm	Luminaire Power	22.00 W	Efficacy	81.63 lm/W	Efficiency	100.00%
Lamps Flux	1795.78 lm	Maximum value	891.23 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. Diam.	90 mm 69 mm	Height Height	188 mm 0 mm			
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.003739 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000905 m2				
Coordinate system Date Measurement Distance	CG 14-11-2019 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 1795.78 lm				
LED Flux=2267.4lm LED Power=19W Eff=79% EfcLed=119lm/W EfcLum=82lm/W CCT=2700K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E. F UTE	79 95 100 100 100 1.00 B	D DIN 5040 B NBN	A60 BZ 1				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.67	1.33	2.00	2.67	3.34	OC	0.67	1.33	2.00	2.67	3.34
OB	0.67	1.33	2.00	2.67	3.34	OD	0.67	1.33	2.00	2.67	3.34

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1600.46	1536.78	1238.36	1041.79	672.87	255.30	151.30	69.63	16.01	0.72
OB	1600.46	1536.78	1238.36	1041.79	672.87	255.30	151.30	69.63	16.01	0.72
OC	1600.46	1536.78	1238.36	1041.79	672.87	255.30	151.30	69.63	16.01	0.72
OD	1600.46	1536.78	1238.36	1041.79	672.87	255.30	151.30	69.63	16.01	0.72

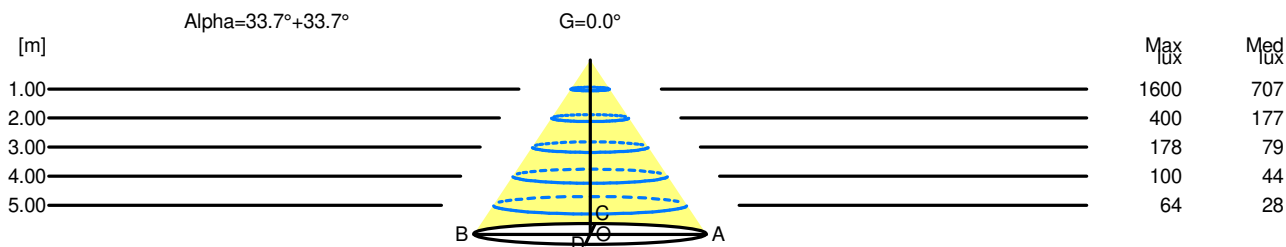

H[m]	D[m]	Max lux	Med lux	Alpha=33.7°+33.7°	G=0.0
1.00	1.33	1600	707		
2.00	2.67	400	177		
3.00	4.00	178	79		
4.00	5.34	100	44		
5.00	6.67	64	28		