

## Luminaire


Code AF41805+AF95201  
 Name SHARP SMD.4X 11W 940 XF EXD SIL+ SCREEN 4X WHITE

## Measurem.

Code FTS1902126  
 Name SHARP SMD.4X 11W 940 XF EXD SIL+ SCREEN 4X WHITE

Luminaire Flux	833.69 lm	Luminaire Power	12.00 W	Efficacy	69.47 lm/W	Efficiency	100.00%
Lamps Flux	833.69 lm	Maximum value	1406.35 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	152 mm	Width	45 mm	Height	90 mm
Rectangular Luminous Area		Length	148 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.005476 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001325 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-07-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		833.69 lm	
LED Flux=1135.98lm LED Power=12W Eff=73% EfcLed=95lm/W EfcLum=69lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	97 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		


152mm x 45mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

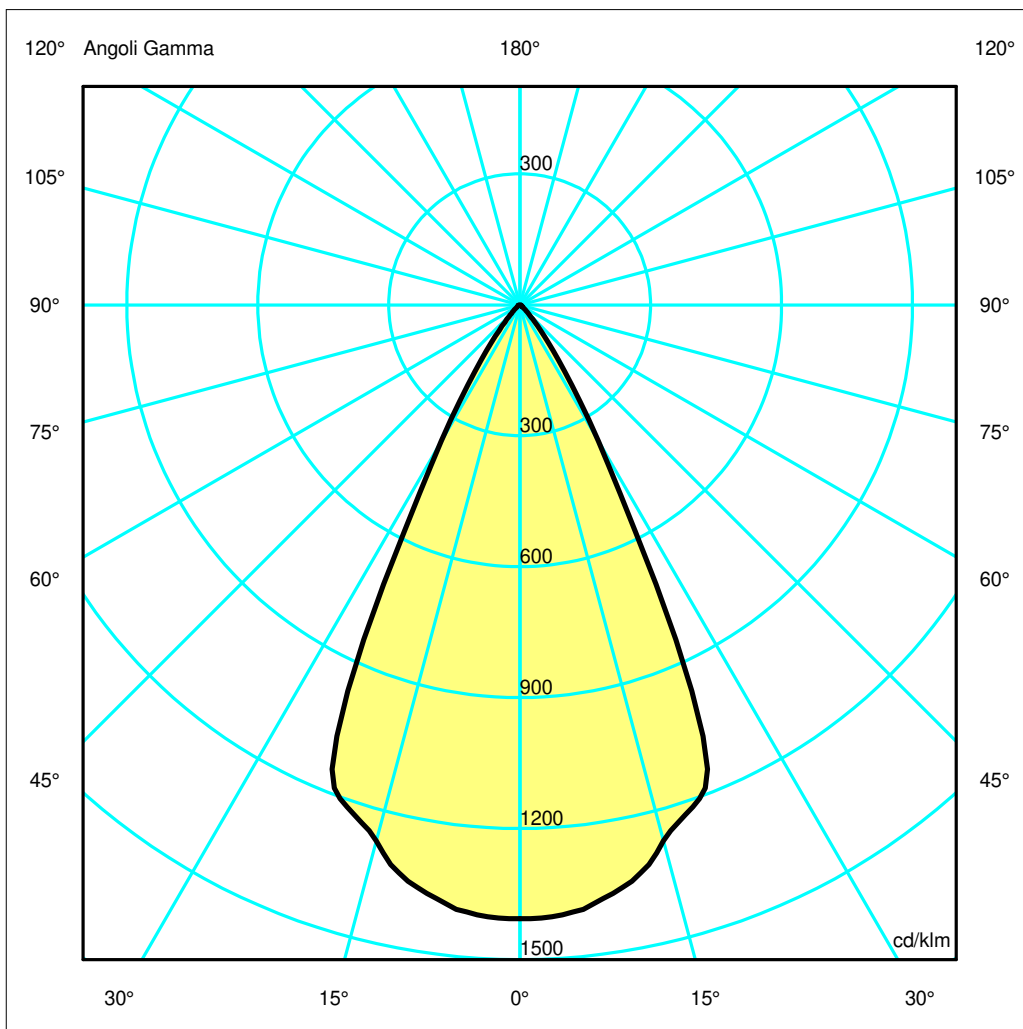

## Luminaire

Code AF41805+AF95201  
Name SHARP SMD.4X 11W 940 XF EXD SIL+ SCREEN 4X WHITE

## Measurement


Code FTS1902126  
Name SHARP SMD.4X 11W 940 XF EXD SIL+ SCREEN 4X WHITE

Luminaire Flux	833.69 lm	Luminaire Power	12.00 W	Efficacy	69.47 lm/W	Efficiency	100.00%
Lamps Flux	833.69 lm	Maximum value	1406.35 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	152 mm	Width	45 mm	Height	90 mm
Rectangular Luminous Area		Length	148 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.005476 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001325 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-07-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		833.69 lm	
LED Flux=1135.98lm LED Power=12W Eff=73% EfcLed=95lm/W EfcLum=69lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	97 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.49	0.98	1.47	1.96	2.45	OC	0.49	0.98	1.47	1.96	2.45
OB	0.49	0.98	1.47	1.96	2.45	OD	0.49	0.98	1.47	1.96	2.45

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1172.45	1164.09	1059.64	705.40	129.26	22.47	5.26	3.36	2.21	0.82
OB	1172.45	1164.09	1059.64	705.40	129.26	22.47	5.26	3.36	2.21	0.82
OC	1172.45	1164.09	1059.64	705.40	129.26	22.47	5.26	3.36	2.21	0.82
OD	1172.45	1164.09	1059.64	705.40	129.26	22.47	5.26	3.36	2.21	0.82

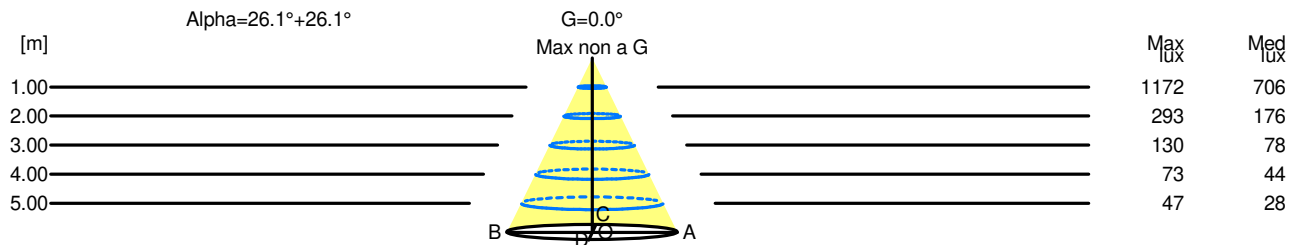

H[m]	D[m]	Max lux	Med lux	Alpha=26.1°+26.1°	G=0.0 Max non a G
1.00	0.98	1172	706		
2.00	1.96	293	176		
3.00	2.94	130	78		
4.00	3.91	73	44		
5.00	4.89	47	28		