

Luminaire


Code AF80901+AF95204
 Name SHARP SMD.12X 33W 927 XF ND BCO+ SCREEN 4X BLACK

Measurem.

Code FTS1902177-A
 Name SHARP SMD.12X 33W 927 XF ND BCO+ SCREEN 4X BLACK

Luminaire Flux	2279 lm	Luminaire Power	37.0 W	Efficacy	61.595 lm/W	Efficiency	100.00%
Source Flux	2279 lm	Maximum value	1430.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	448 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	444 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.016428 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003974 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		25-11-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2279 lm	
LED Flux=3181lm LED Power=33W Eff=72% EfcLed=96lm/W EfcLum=62lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=272160h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	


448mm x 45mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

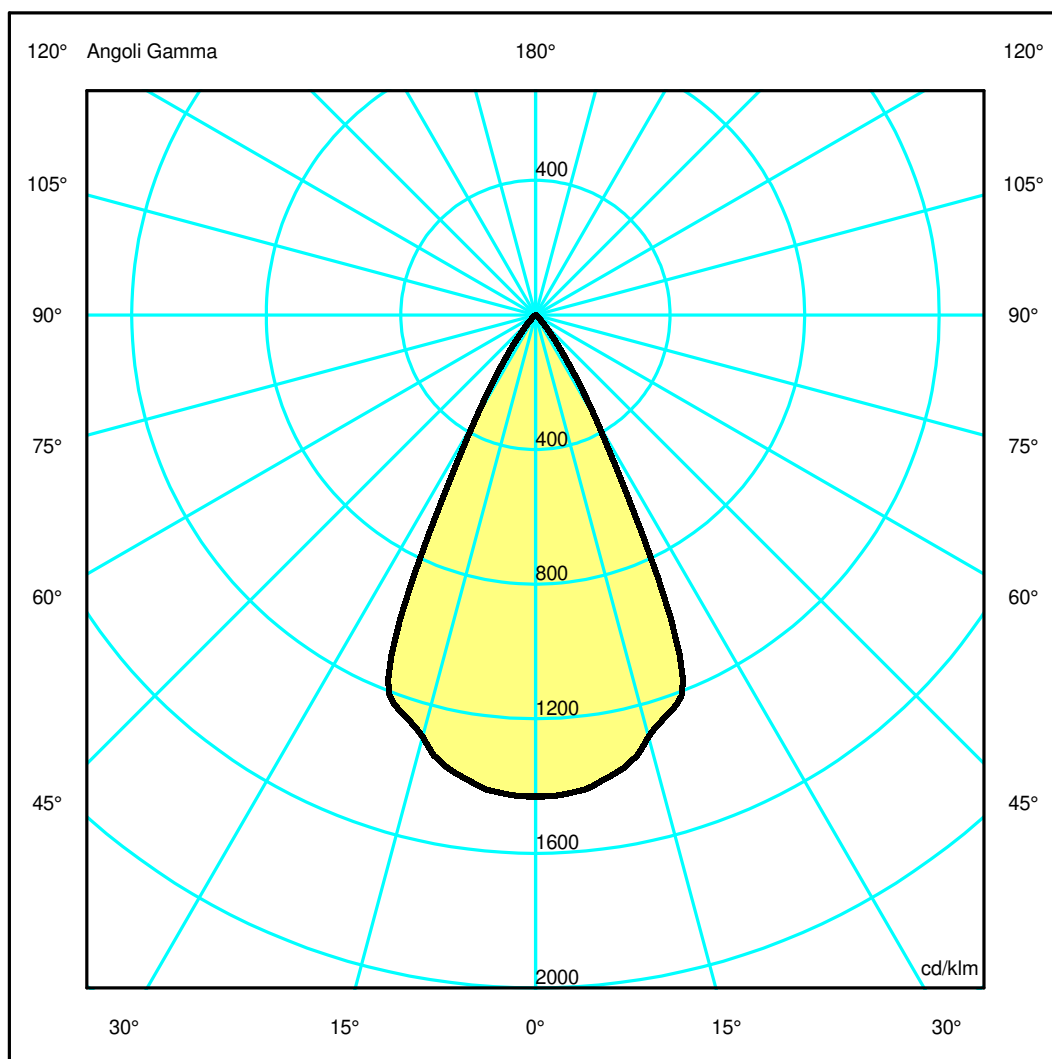

Luminaire

Code AF80901+AF95204
Name SHARP SMD.12X 33W 927 XF ND BCO+ SCREEN 4X BLACK

Measurem.


Code FTS1902177-A
Name SHARP SMD.12X 33W 927 XF ND BCO+ SCREEN 4X BLACK

Luminaire Flux	2279 lm	Luminaire Power	37.0 W	Efficacy	61.595 lm/W	Efficiency	100.00%
Source Flux	2279 lm	Maximum value	1430.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	448 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	444 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.016428 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003974 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		25-11-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2279 lm	
LED Flux=3181lm LED Power=33W Eff=72% EfcLed=96lm/W EfcLum=62lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=272160h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.49	0.98	1.47	1.96	2.44	OC	0.49	0.98	1.47	1.96	2.44
OB	0.49	0.98	1.47	1.96	2.44	OD	0.49	0.98	1.47	1.96	2.44

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3261.19	3237.74	2956.28	1966.42	348.18	50.79	3.96	0.00	0.00	0.00
OB	3261.19	3237.74	2956.28	1966.42	348.18	50.79	3.96	0.00	0.00	0.00
OC	3261.19	3237.74	2956.28	1966.42	348.18	50.79	3.96	0.00	0.00	0.00
OD	3261.19	3237.74	2956.28	1966.42	348.18	50.79	3.96	0.00	0.00	0.00

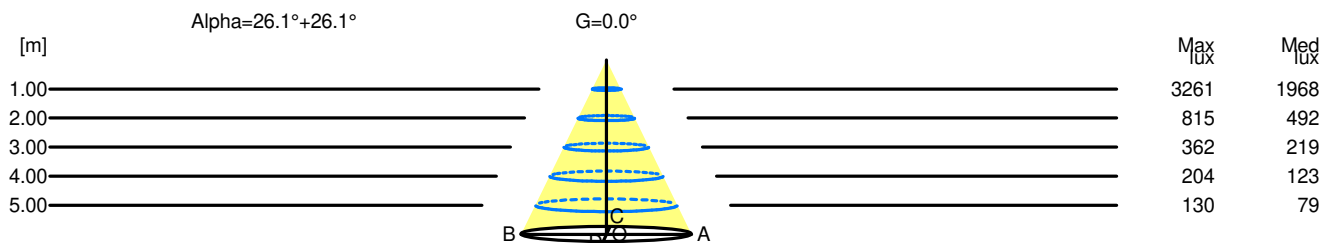

H[m]	D[m]	Max lux	Med lux	Alpha=26.1°+26.1°	G=0.0
1.00	0.98	3261	1968		
2.00	1.96	815	492		
3.00	2.93	362	219		
4.00	3.91	204	123		
5.00	4.89	130	79		