

## Luminaire

Code 1994260APP\_N  
Name DISCOVERY VERTICAL 140 TW APP COMP.BZO - COLD

## Measurement

Code FTS2000433  
Name DISCOVERY VERTICAL 140 TW APP COMP.BZO - COLD


Luminaire Flux	5650 lm	Luminaire Power	84.0 W	Efficacy	67.267 lm/W	Efficiency	100.00%
Source Flux	5650 lm	Maximum value	160.92 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical
Round Luminaire		Diam.	1400 mm	Height	17 mm		
Round Luminous Area		Diam.	1350 mm	Height	0 mm		
Horizontal Luminous Area			1.431388 m <sup>2</sup>	Emitting area on Plane 180°			0.000000 m <sup>2</sup>
Emitting area on Plane 0°			0.000000 m <sup>2</sup>	Emitting area on Plane 270°			0.000000 m <sup>2</sup>
Emitting area on Plane 90°			0.000000 m <sup>2</sup>	Glare area at 76°			0.346284 m <sup>2</sup>
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		11-11-2020		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5650 lm	

LED Flux=9347,86lm LED Power=71W Eff=60% EfcLed=132lm/W EfcLum=63lm/W CCT=6500K Ra=80 - L70(6K)=60000 h


C.I.E. 32 64 89 49 100  
F UTE 0.49 I + 0.51 T

D DIN 5040  
B NBN

C22  
BZ 6

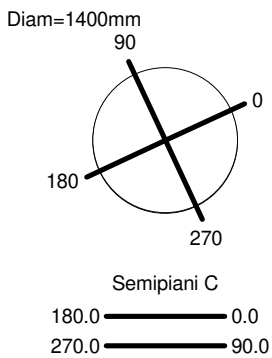

ULOR 51.23 %  
DLOR 48.77 %  
RN 51.23 %

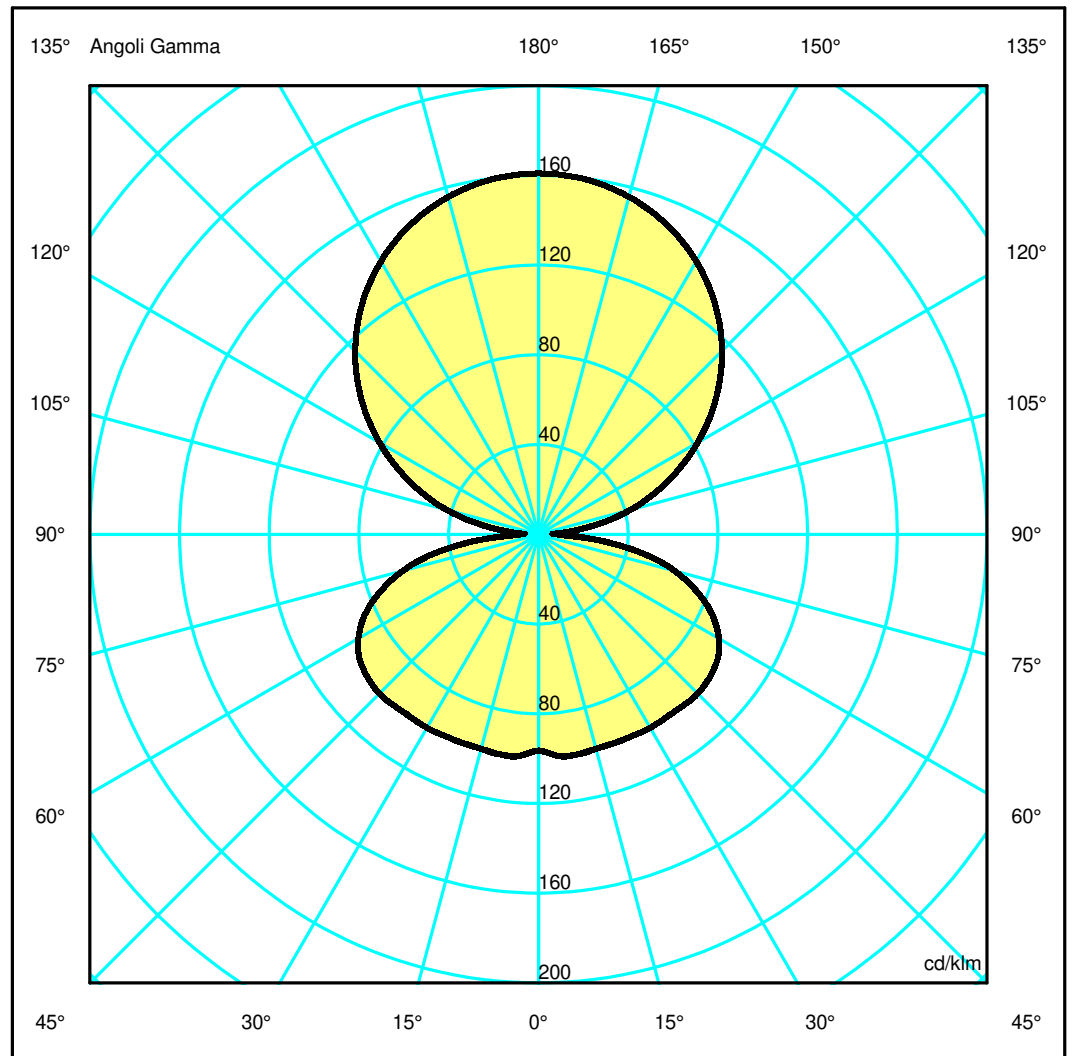

## Luminaire

Code 1994260APP\_N  
Name DISCOVERY VERTICAL 140 TW APP COMP.BZO - COLD

## Measurement


Code FTS2000433  
Name DISCOVERY VERTICAL 140 TW APP COMP.BZO - COLD

Luminaire Flux	5650 lm	Luminaire Power	84.0 W	Efficacy	67.267 lm/W	Efficiency	100.00%
Source Flux	5650 lm	Maximum value	160.92 cd/klm	Position	C=0.00 G=180.00	CG	Asymmetrical
Round Luminaire		Diam.	1400 mm	Height	17 mm		
Round Luminous Area		Diam.	1350 mm	Height	0 mm		
Horizontal Luminous Area			1.431388 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.346284 m2
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		11-11-2020		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5650 lm	
LED Flux=9347,86lm LED Power=71W Eff=60% EfcLed=132lm/W EfcLum=63lm/W CCT=6500K Ra=80 - L70(6K)=60000 h							
C.I.E.	32 64 89 49 100			D DIN 5040	C22		
F UTE	0.49 I + 0.51 T			B NBN	BZ 6		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.77	3.55	5.32	7.09	8.86	OC	1.77	3.55	5.32	7.09	8.86
OB	1.77	3.55	5.32	7.09	8.86	OD	1.77	3.55	5.32	7.09	8.86

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	909.24	905.99	880.06	829.15	753.23	653.48	531.18	390.92	239.59	73.49
OB	909.24	905.99	880.06	829.15	753.23	653.48	531.18	390.92	239.59	73.49
OC	909.24	905.99	880.06	829.15	753.23	653.48	531.18	390.92	239.59	73.49
OD	909.24	905.99	880.06	829.15	753.23	653.48	531.18	390.92	239.59	73.49

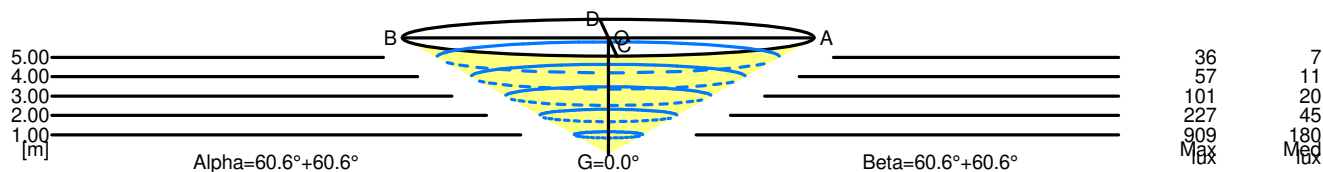

5.00	17.73	36	7	
4.00	14.18	57	11	
3.00	10.64	101	20	
2.00	7.09	227	45	
1.00	3.55	909	180	
H[m]	D[m]	Max lux	Med lux	Alpha=60.6°+60.6° G=0.0

5.00	17.73	36	7	
4.00	14.18	57	11	
3.00	10.64	101	20	
2.00	7.09	227	45	
1.00	3.55	909	180	
H[m]	D[m]	Max lux	Med lux	Beta=60.6°+60.6° G=0.0