

Luminaire


Code 2041030APP_R
Name DISCOVERY F RGBW APP COMP NRO - RED

Measurem.

Code FTS2102813-A
Name DISCOVERY F RGBW APP COMP NRO - RED

Luminaire Flux	294 lm	Luminaire Power	18.0 W	Efficacy	16.344 lm/W	Efficiency	100.00%
Source Flux	294 lm	Maximum value	151.67 cd/klm	Position	C=90.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1570 mm	Width	400 mm	Height	17 mm
Rectangular Luminous Area		Length	1500 mm	Width	330 mm	Height	10 mm
Horizontal Luminous Area		0.495000 m ²		Emitting area on Plane 180°		0.015000 m ²	
Emitting area on Plane 0°		0.015000 m ²		Emitting area on Plane 270°		0.003300 m ²	
Emitting area on Plane 90°		0.003300 m ²		Glare area at 76°		0.134306 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		28-09-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		294 lm	
LED Flux=490lm LED Power=12W Eff=60% EfcLed=41lm/W EfcLum=16lm/W L70(6K)=60000 h							
C.I.E.	42 72 92 50 100			D DIN 5040	C31		
F UTE	0.50 G + 0.50 T			B NBN	BZ 5		

1570mm x 400mm




Semipiani C

180.0 ——— 0.0
270.0 ——— 90.0

ULOR 49.85 %

DLOR 50.15 %

RN 49.85 %

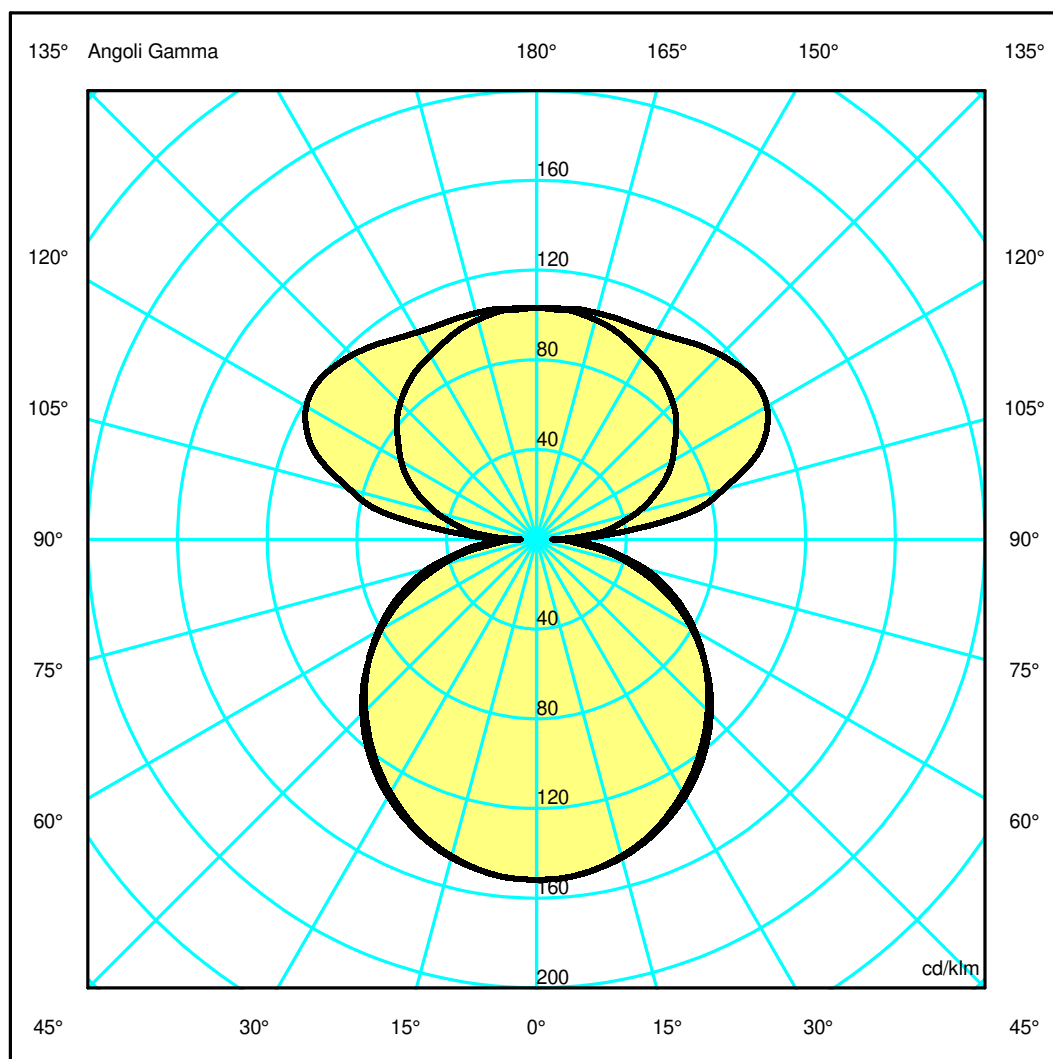

Luminaire

Code 2041030APP_R
Name DISCOVERY F RGBW APP COMP NRO - RED

Measurment

Code FTS2102813-A
Name DISCOVERY F RGBW APP COMP NRO - RED

Luminaire Flux	294 lm	Luminaire Power	18.0 W	Efficacy	16.344 lm/W	Efficiency	100.00%
Source Flux	294 lm	Maximum value	151.67 cd/klm	Position	C=90.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1570 mm	Width	400 mm	Height	17 mm
Rectangular Luminous Area		Length	1500 mm	Width	330 mm	Height	10 mm
Horizontal Luminous Area		0.495000 m2		Emitting area on Plane 180°		0.015000 m2	
Emitting area on Plane 0°		0.015000 m2		Emitting area on Plane 270°		0.003300 m2	
Emitting area on Plane 90°		0.003300 m2		Glare area at 76°		0.134306 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		28-09-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		294 lm	


LED Flux=490lm LED Power=12W Eff=60% EfcLed=41lm/W EfcLum=16lm/W L70(6K)=60000 h

C.I.E.	42 72 92 50 100	D DIN 5040	C31
F UTE	0.50 G + 0.50 T	B NBN	BZ 5

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.96	3.91	5.87	7.83	9.78	OC	1.88	3.75	5.63	7.51	9.38
OB	1.96	3.91	5.87	7.83	9.78	OD	1.88	3.75	5.63	7.51	9.38

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	44.62	44.51	43.03	40.22	36.33	31.74	26.73	21.09	14.60	7.08
OB	44.62	44.51	43.03	40.22	36.33	31.74	26.73	21.09	14.60	7.08
OC	44.62	44.53	43.20	40.60	36.98	32.33	26.65	20.23	12.94	5.03
OD	44.62	44.53	43.20	40.60	36.98	32.33	26.65	20.23	12.94	5.03

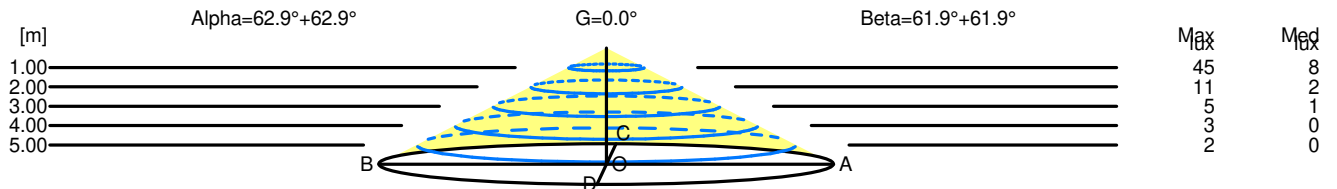

H[m]	D[m]	Max lux	Med lux	Alpha=62.9°+62.9°	G=0.0
1.00	3.91	45	8		
2.00	7.83	11	2		
3.00	11.74	5	1		
4.00	15.65	3	0		
5.00	19.56	2	0		

H[m]	D[m]	Max lux	Med lux	Beta=61.9°+61.9°	G=0.0
1.00	3.75	45	8		
2.00	7.51	11	2		
3.00	11.26	5	1		
4.00	15.01	3	0		
5.00	18.77	2	0		