

Luminaire

Code 1202i00A
Name Alphabet of light - i

Measurement

Code FTS1700170-A
Name Alphabet of light - i


Luminaire Flux	684 lm	Luminaire Power	8.0 W	Efficacy	85.503 lm/W	Efficiency	100.00%
Source Flux	684 lm	Maximum value	114.34 cd/klm	Position	C=90.00 G=89.00	CG	Double Symmetrical
Rectangular Luminaire		Length	50 mm	Width	50 mm	Height	650 mm
Rectangular Luminous Area		Length	50 mm	Width	50 mm	Height	650 mm
Horizontal Luminous Area		0.002500 m ²		Emitting area on Plane 180°		0.032500 m ²	
Emitting area on Plane 0°		0.032500 m ²		Emitting area on Plane 270°		0.032500 m ²	
Emitting area on Plane 90°		0.032500 m ²		Glare area at 76°		0.032139 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		10-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		684 lm	

LED Flux=780lm LED Power=8W Eff=88% EfcLed=97lm/W EfcLum=86lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=36000h

C.I.E. 14 38 68 50 100
F UTE --

D DIN 5040
B NBN

C11
BZ 10

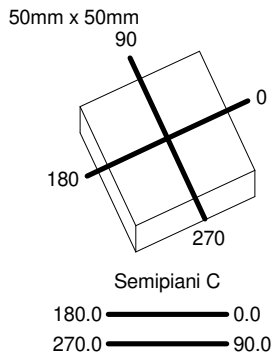

ULOR 50.00 %
DLOR 50.00 %
RN 50.00 %

