


## Luminaire

Code BB01000+DV1018 + M239200  
 Name LUCERI TLESS CUT.EDGE max46W 930 MIRROR + Driver 35W DIM + schermo trasparente

## Measurement

Code FTS1801241  
 Name LUCERI TLESS CUT.EDGE max46W 930 MIRROR + Driver 35W DIM + schermo trasparente

Luminaire Flux	2463.94 lm	Luminaire Power	27.00 W	Efficacy	91.26 lm/W	Efficiency	100.00%
Sources Flux	2463.94 lm	Maximum value	757.51 cd/klm	Position	C=0.00 G=12.00	CG	Rotosymmetrical
Round Luminaire		Diam.	250 mm	Height	185 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area		0.030172 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.007299 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		18-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2463.94 lm	
LED Flux=3130lm LED Power=25W Eff=79% EfcLed=125lm/W EfcLum=91lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	90 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

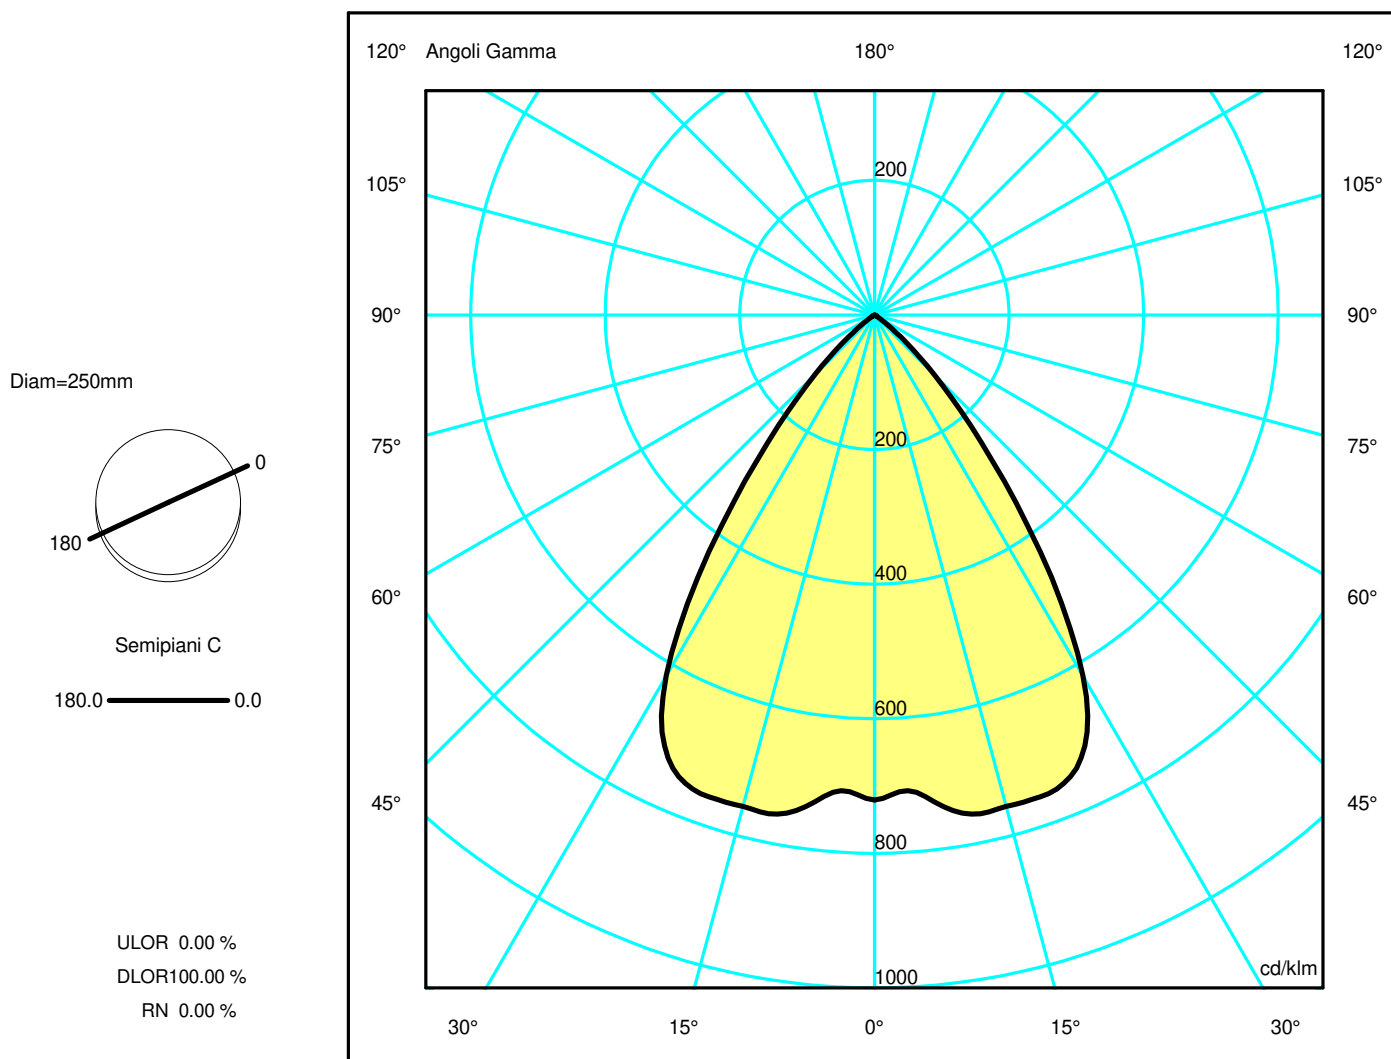

## Luminaire

Code BB01000+DV1018 + M239200  
 Name LUCERI TLESS CUT.EDGE max46W 930 MIRROR + Driver 35W DIM + schermo trasparente

## Measurement


Code FTS1801241  
 Name LUCERI TLESS CUT.EDGE max46W 930 MIRROR + Driver 35W DIM + schermo trasparente

Luminaire Flux	2463.94 lm	Luminaire Power	27.00 W	Efficacy	91.26 lm/W	Efficiency	100.00%
Sources Flux	2463.94 lm	Maximum value	757.51 cd/klm	Position	C=0.00 G=12.00	CG	Rotosymmetrical
Round Luminaire		Diam.	250 mm	Height	185 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area		0.030172 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.007299 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		18-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2463.94 lm	
LED Flux=3130lm LED Power=25W Eff=79% EfcLed=125lm/W EfcLum=91lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	90 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.73	1.47	2.20	2.93	3.66	OC	0.73	1.47	2.20	2.93	3.66
OB	0.73	1.47	2.20	2.93	3.66	OD	0.73	1.47	2.20	2.93	3.66

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1774.95	1754.25	1862.86	1788.98	1055.67	311.90	34.67	5.54	2.67	1.59
OB	1774.95	1754.25	1862.86	1788.98	1055.67	311.90	34.67	5.54	2.67	1.59
OC	1774.95	1754.25	1862.86	1788.98	1055.67	311.90	34.67	5.54	2.67	1.59
OD	1774.95	1754.25	1862.86	1788.98	1055.67	311.90	34.67	5.54	2.67	1.59

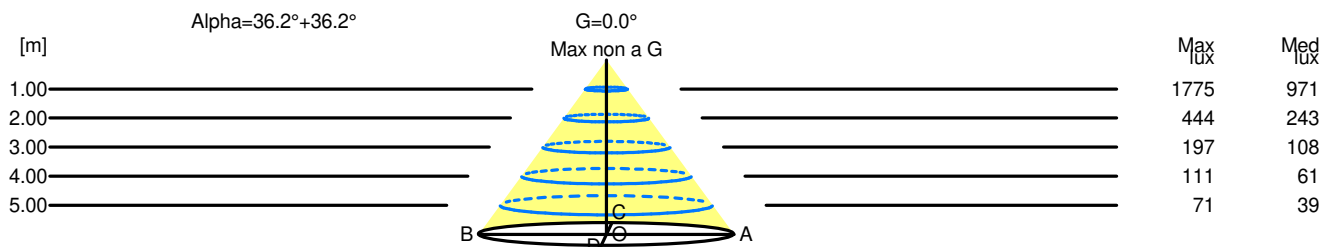

H[m]	D[m]	Max lux	Med lux	Alpha=36.2°+36.2°	G=0.0 Max non a G
1.00	1.47	1775	971		
2.00	2.93	444	243		
3.00	4.40	197	108		
4.00	5.86	111	61		
5.00	7.33	71	39		