


## Luminaire

Code BB02101+DV1018 + M239200  
 Name LUCERI TRIM max46W 940 MIRROR WHITE + Driver 35W DIM + schermo trasparente

## Measurement

Code FTS1801242  
 Name LUCERI TRIM max46W 940 MIRROR WHITE + Driver 35W DIM + schermo trasparente

Luminaire Flux	2635.55 lm	Luminaire Power	27.00 W	Efficacy	97.61 lm/W	Efficiency	100.00%
Sources Flux	2635.55 lm	Maximum value	757.51 cd/klm	Position	C=0.00 G=12.00	CG	Rotosymmetrical
Round Luminaire		Diam.	250 mm	Height	185 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area			0.030172 m <sup>2</sup>	Emitting area on Plane 180°			0.000000 m <sup>2</sup>
Emitting area on Plane 0°			0.000000 m <sup>2</sup>	Emitting area on Plane 270°			0.000000 m <sup>2</sup>
Emitting area on Plane 90°			0.000000 m <sup>2</sup>	Glare area at 76°			0.007299 m <sup>2</sup>
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		18-06-2018		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			2635.55 lm
LED Flux=3348lm LED Power=25W Eff=79% EfcLed=134lm/W EfcLum=98lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	90 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

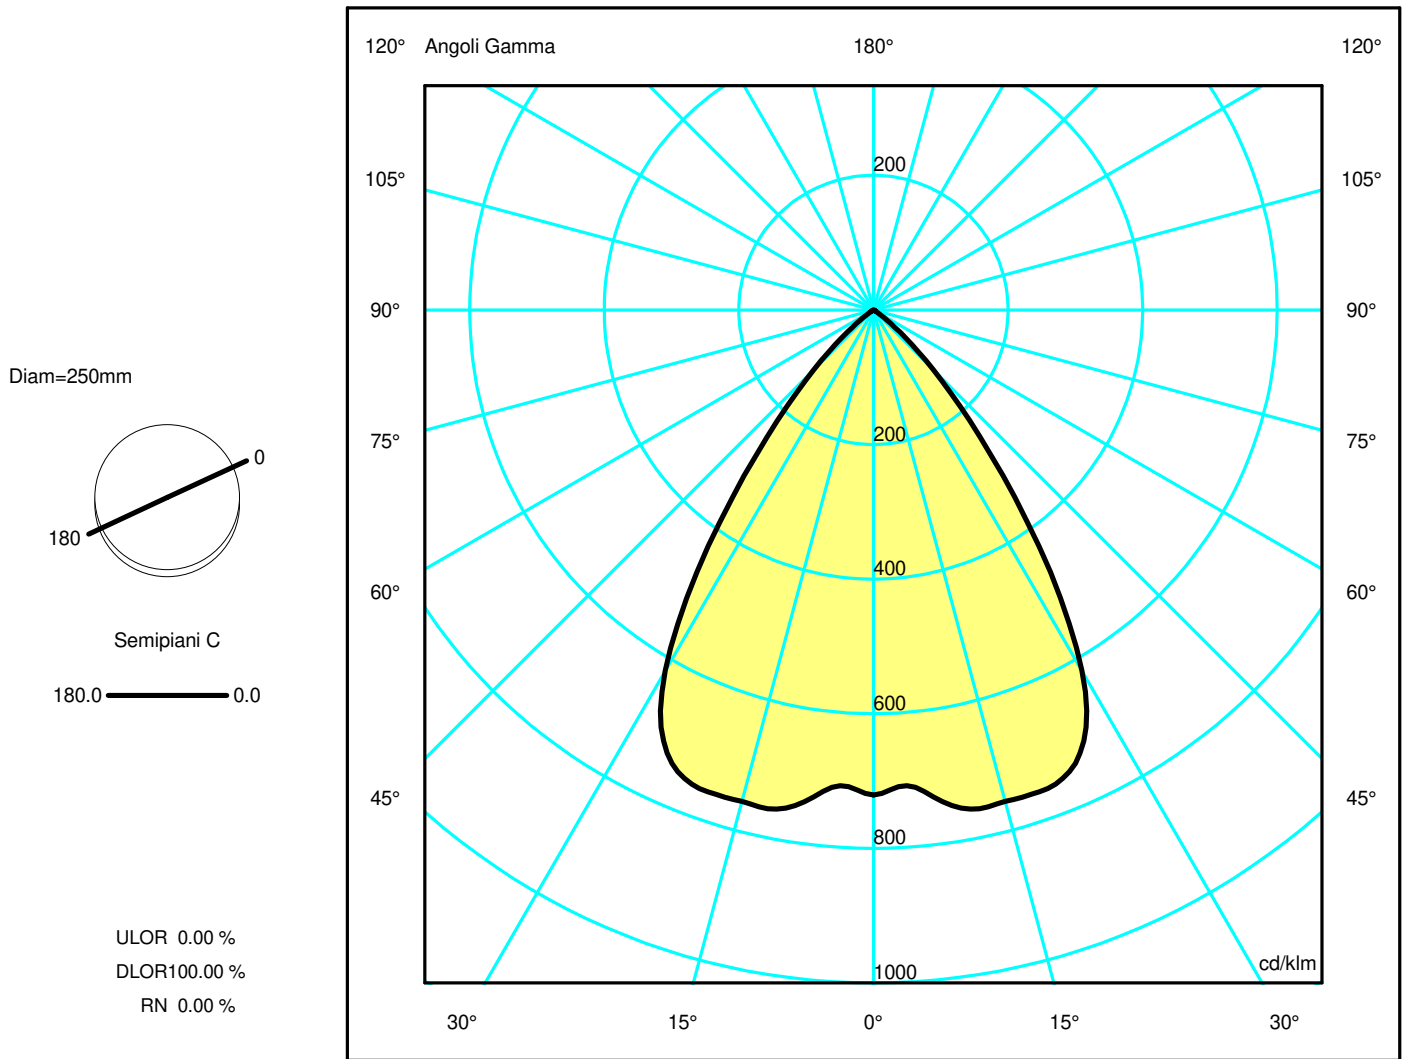

## Luminaire

Code BB02101+DV1018 + M239200  
 Name LUCERI TRIM max46W 940 MIRROR WHITE + Driver 35W DIM + schermo trasparente

## Measurement


Code FTS1801242  
 Name LUCERI TRIM max46W 940 MIRROR WHITE + Driver 35W DIM + schermo trasparente

Luminaire Flux	2635.55 lm	Luminaire Power	27.00 W	Efficacy	97.61 lm/W	Efficiency	100.00%
Sources Flux	2635.55 lm	Maximum value	757.51 cd/klm	Position	C=0.00 G=12.00	CG	Rotosymmetrical
Round Luminaire		Diam.	250 mm	Height	185 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area		0.030172 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007299 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		18-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2635.55 lm	
LED Flux=3348lm LED Power=25W Eff=79% EfcLed=134lm/W EfcLum=98lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	90 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.73	1.47	2.20	2.93	3.66	OC	0.73	1.47	2.20	2.93	3.66
OB	0.73	1.47	2.20	2.93	3.66	OD	0.73	1.47	2.20	2.93	3.66

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1898.57	1876.43	1992.60	1913.58	1129.19	333.63	37.09	5.93	2.85	1.70
OB	1898.57	1876.43	1992.60	1913.58	1129.19	333.63	37.09	5.93	2.85	1.70
OC	1898.57	1876.43	1992.60	1913.58	1129.19	333.63	37.09	5.93	2.85	1.70
OD	1898.57	1876.43	1992.60	1913.58	1129.19	333.63	37.09	5.93	2.85	1.70

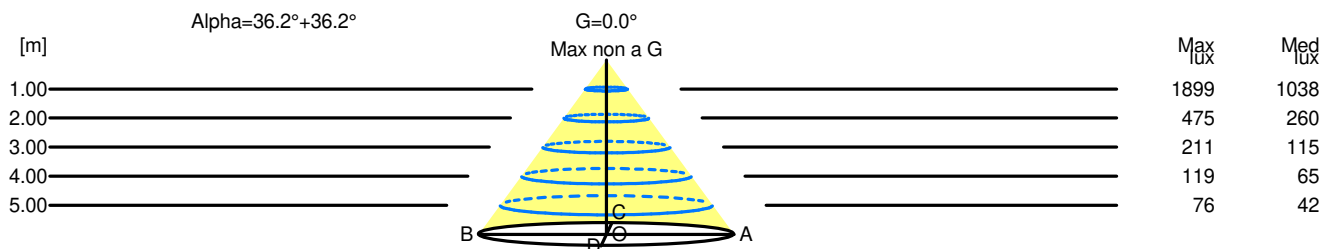

H[m]	D[m]	Max lux	Med lux	Alpha=36.2°+36.2°	G=0.0 Max non a G
1.00	1.47	1899	1038		
2.00	2.93	475	260		
3.00	4.40	211	115		
4.00	5.86	119	65		
5.00	7.33	76	42		