


Luminaire

Code BB02001+DV1017 + M239700
 Name LUCERI TRIM max46W 930 MIRROR WHITE + Driver 35W ND + schermo opalino

Measurement

Code FTS1801305
 Name LUCERI TRIM max46W 930 MIRROR WHITE + Driver 35W ND + schermo opalino

Luminaire Flux	2293.04 lm	Luminaire Power	27.00 W	Efficacy	84.93 lm/W	Efficiency	100.00%
Sources Flux	2293.04 lm	Maximum value	440.98 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	250 mm	Height	185 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area			0.030172 m ²	Emitting area on Plane 180°			0.000000 m ²
Emitting area on Plane 0°			0.000000 m ²	Emitting area on Plane 270°			0.000000 m ²
Emitting area on Plane 90°			0.000000 m ²	Glare area at 76°			0.007299 m ²
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		18-06-2018		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			2293.04 lm
LED Flux=3130lm LED Power=25W Eff=73% EfcLed=125lm/W EfcLum=85lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	53 82 97 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 4		

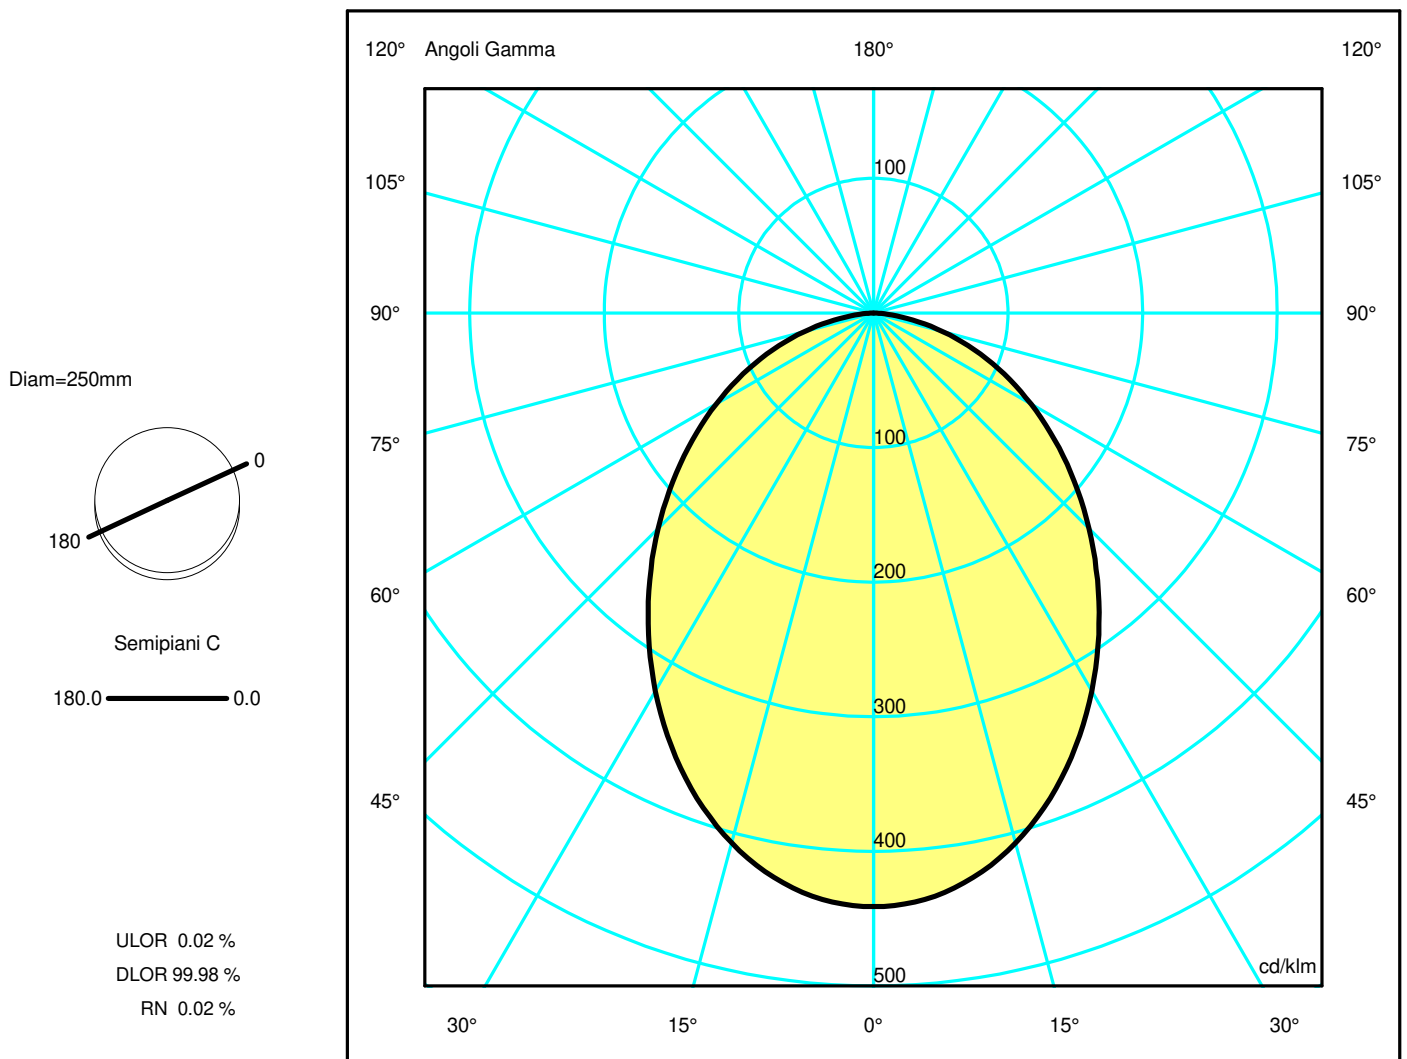

Luminaire

Code BB02001+DV1017 + M239700
 Name LUCERI TRIM max46W 930 MIRROR WHITE + Driver 35W ND + schermo opalino

Measurem.


Code FTS1801305
 Name LUCERI TRIM max46W 930 MIRROR WHITE + Driver 35W ND + schermo opalino

Luminaire Flux	2293.04 lm	Luminaire Power	27.00 W	Efficacy	84.93 lm/W	Efficiency	100.00%
Sources Flux	2293.04 lm	Maximum value	440.98 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	250 mm	Height	185 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area		0.030172 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007299 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		18-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2293.04 lm	
LED Flux=3130lm LED Power=25W Eff=73% EfcLed=125lm/W EfcLum=85lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	53 82 97 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.03	2.06	3.10	4.13	5.16	OC	1.03	2.06	3.10	4.13	5.16
OB	1.03	2.06	3.10	4.13	5.16	OD	1.03	2.06	3.10	4.13	5.16

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1011.18	1002.55	934.59	814.61	668.86	519.06	376.86	245.30	123.26	24.25
OB	1011.18	1002.55	934.59	814.61	668.86	519.06	376.86	245.30	123.26	24.25
OC	1011.18	1002.55	934.59	814.61	668.86	519.06	376.86	245.30	123.26	24.25
OD	1011.18	1002.55	934.59	814.61	668.86	519.06	376.86	245.30	123.26	24.25

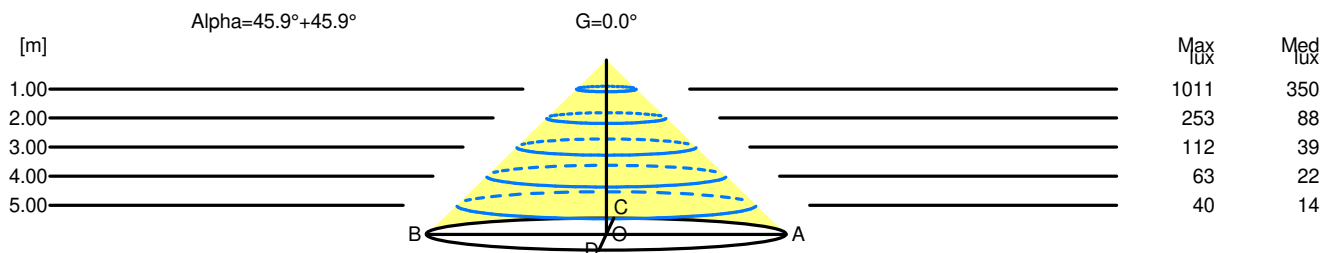

H[m]	D[m]	Max lux	Med lux	Alpha=45.9°+45.9°	G=0.0
1.00	2.06	1011	350		
2.00	4.13	253	88		
3.00	6.19	112	39		
4.00	8.26	63	22		
5.00	10.32	40	14		