


## Luminaire

Code BB10300+DV1016  
 Name LUCERI Q TLESS ROUND.max 46W 930 COMFORT + Driver 50W DIM


## Measurem.

Code FTS1801147  
 Name LUCERI Q TLESS ROUND.max 46W 930 COMFORT + Driver 50W DIM

Luminaire Flux	3969.42 lm	Luminaire Power	54.00 W	Efficacy	73.51 lm/W	Efficiency	100.00%
Sources Flux	3969.42 lm	Maximum value	887.71 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	188 mm	Width	188 mm	Height	238 mm
Rectangular Luminous Area		Length	177 mm	Width	177 mm	Height	0 mm
Horizontal Luminous Area		0.031329 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007579 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3969.42 lm	
LED Flux=5451lm LED Power=50W Eff=73% EfcLed=109lm/W EfcLum=74lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	81 94 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

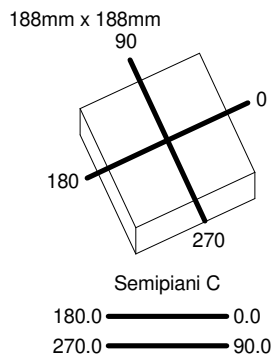

ULOR 0.01 %  
 DLOR 99.99 %  
 RN 0.01 %

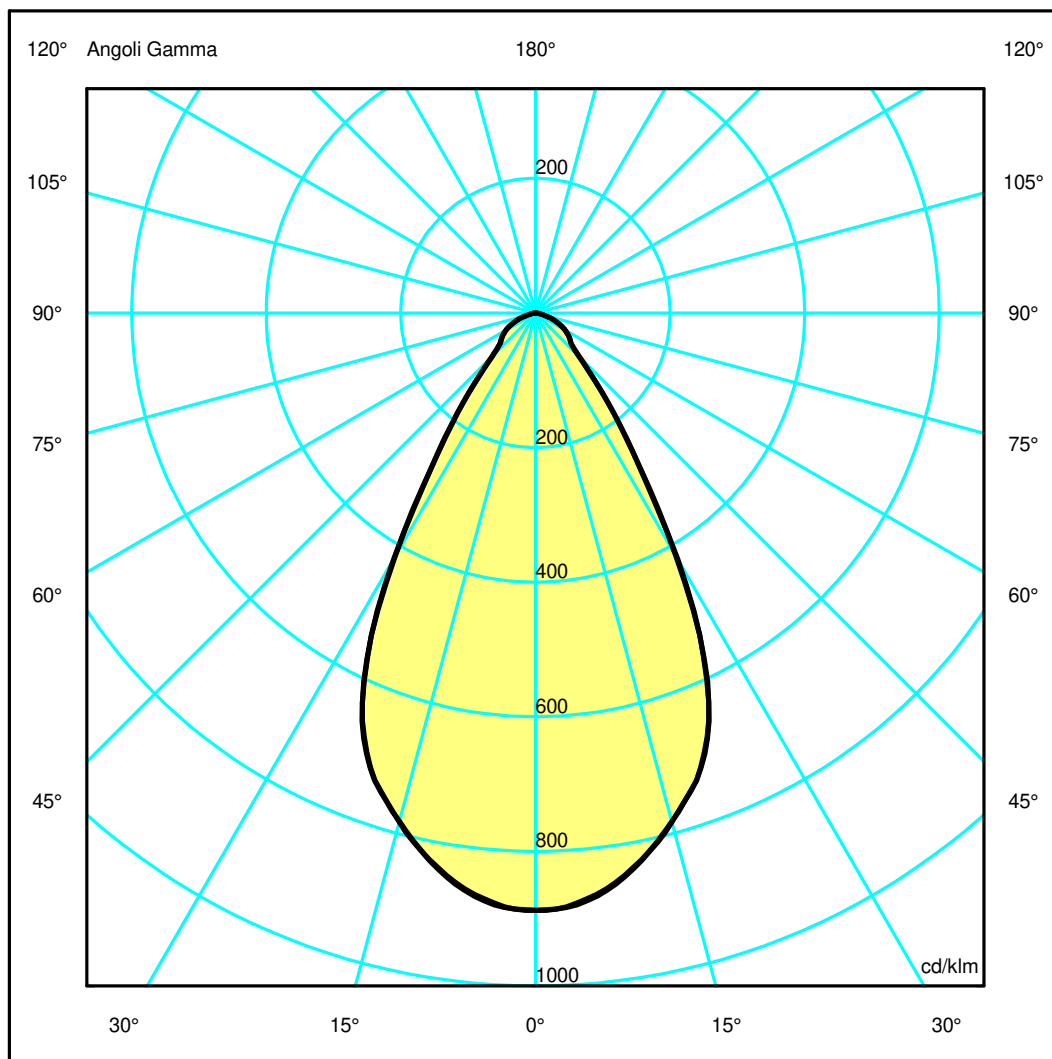

## Luminaire

Code BB10300+DV1016  
Name LUCERI Q TLESS ROUND.max 46W 930 COMFORT + Driver 50W DIM

## Measurerm.


Code FTS1801147  
Name LUCERI Q TLESS ROUND.max 46W 930 COMFORT + Driver 50W DIM

Luminaire Flux	3969.42 lm	Luminaire Power	54.00 W	Efficacy	73.51 lm/W	Efficiency	100.00%
Sources Flux	3969.42 lm	Maximum value	887.71 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	188 mm	Width	188 mm	Height	238 mm
Rectangular Luminous Area		Length	177 mm	Width	177 mm	Height	0 mm
Horizontal Luminous Area		0.031329 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007579 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3969.42 lm	
LED Flux=5451lm LED Power=50W Eff=73% EfcLed=109lm/W EfcLum=74lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	81 94 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.56	1.12	1.69	2.25	2.81	OC	0.56	1.13	1.69	2.26	2.82
OB	0.56	1.12	1.69	2.25	2.81	OD	0.56	1.13	1.69	2.26	2.82

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	3523.69	3479.99	3107.51	2389.72	995.76	366.95	238.99	156.06	62.44	12.70
OB	3523.69	3479.99	3107.51	2389.72	995.76	366.95	238.99	156.06	62.44	12.70
OC	3523.69	3467.85	3104.16	2400.98	1004.12	362.90	239.37	156.22	61.56	12.27
OD	3523.69	3467.85	3104.16	2400.98	1004.12	362.90	239.37	156.22	61.56	12.27

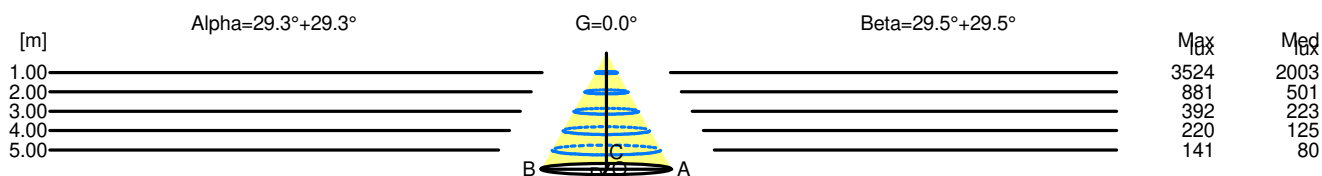

H[m]	D[m]	Max lux	Med lux	Alpha=29.3°+29.3°	G=0.0
1.00	1.12	3524	2003		
2.00	2.25	881	501		
3.00	3.37	392	223		
4.00	4.50	220	125		
5.00	5.62	141	80		

H[m]	D[m]	Max lux	Med lux	Beta=29.5°+29.5°	G=0.0
1.00	1.13	3524	2003		
2.00	2.26	881	501		
3.00	3.39	392	223		
4.00	4.52	220	125		
5.00	5.65	141	80		