


Luminaire

Code BB10400+DV1016
 Name LUCERI Q TLESS ROUND.max 46W 940 COMFORT + Driver 50W DIM

Measurem.

Code FTS1801148
 Name LUCERI Q TLESS ROUND.max 46W 940 COMFORT + Driver 50W DIM

Luminaire Flux	4232.30 lm	Luminaire Power	54.00 W	Efficacy	78.38 lm/W	Efficiency	100.00%
Sources Flux	4232.30 lm	Maximum value	887.71 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	188 mm	Width	188 mm	Height	238 mm
Rectangular Luminous Area		Length	177 mm	Width	177 mm	Height	0 mm
Horizontal Luminous Area	0.031329 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.007579 m2		
Coordinate system	CG			Symmetry Type	Double Symmetrical		
Date	20-06-2018			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	4232.30 lm		
LED Flux=5812lm LED Power=50W Eff=73% EfcLed=116lm/W EfcLum=78lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	81 94 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

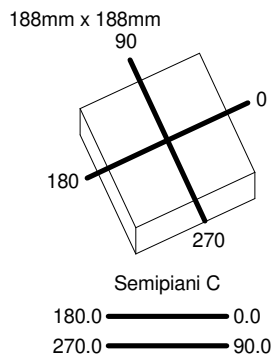

ULOR 0.01 %
 DLOR 99.99 %
 RN 0.01 %

