


Luminaire

Code BB12105+DV1017 + M239700
 Name LUCERI Q TRIM max46W 940 MIRROR SILV. + Driver 35W ND + schermo opalino


Measurement

Code FTS1801310
 Name LUCERI Q TRIM max46W 940 MIRROR SILV. + Driver 35W ND + schermo opalino

Luminaire Flux	2266.93 lm	Luminaire Power	27.00 W	Efficacy	83.96 lm/W	Efficiency	100.00%
Sources Flux	2266.93 lm	Maximum value	431.21 cd/klm	Position	C=45.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	236 mm	Width	236 mm	Height	185 mm
Rectangular Luminous Area		Length	170 mm	Width	170 mm	Height	0 mm
Horizontal Luminous Area		0.028900 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006992 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		29-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2266.93 lm	
LED Flux=3348lm LED Power=25W Eff=68% EfcLed=134lm/W EfcLum=84lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	52 82 96 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 4		

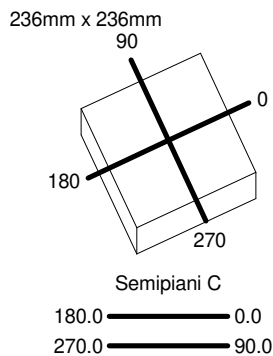

ULOR 0.04 %
 DLOR 99.96 %
 RN 0.04 %

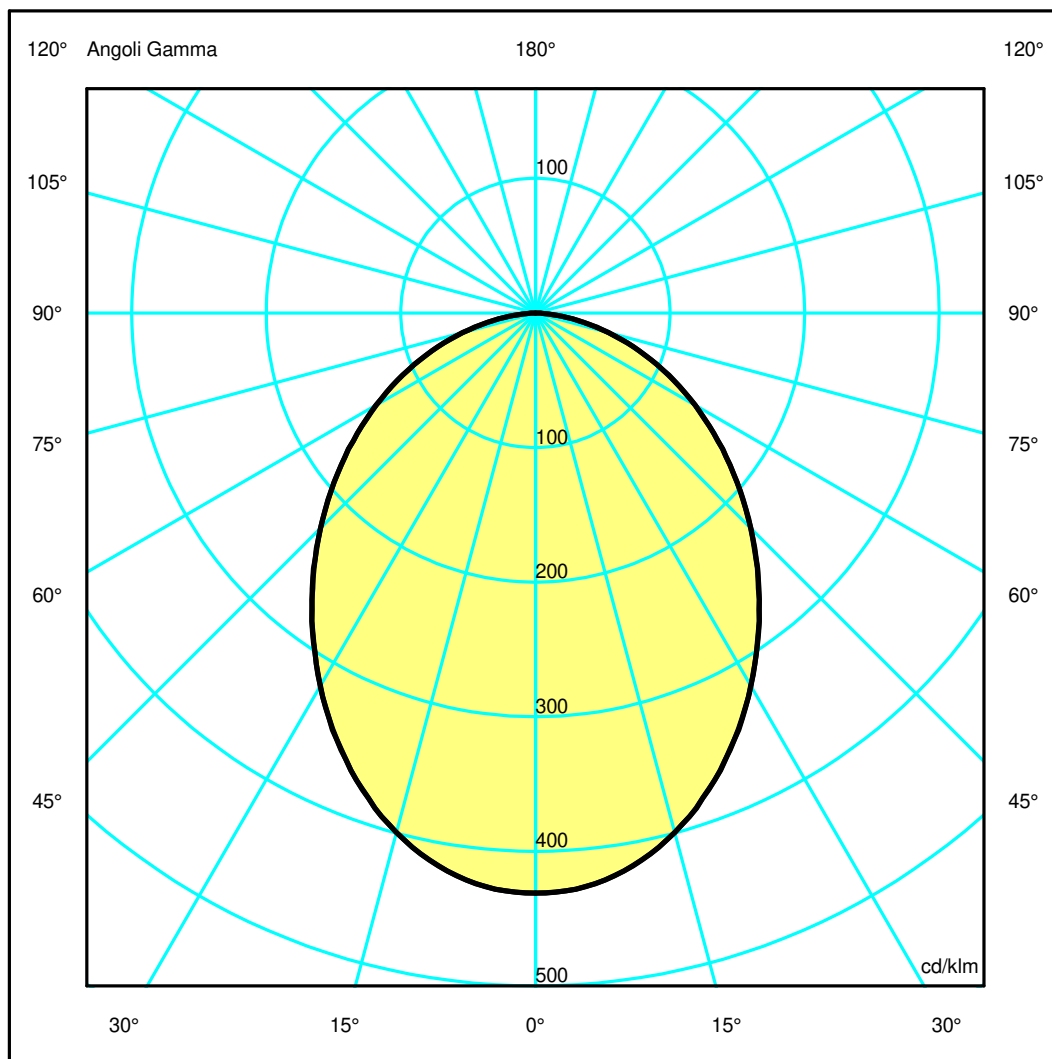

Luminaire

Code BB12105+DV1017 + M239700
 Name LUCERI Q TRIM max46W 940 MIRROR SILV. + Driver 35W ND + schermo opalino

Measurerm.


Code FTS1801310
 Name LUCERI Q TRIM max46W 940 MIRROR SILV. + Driver 35W ND + schermo opalino

Luminaire Flux	2266.93 lm	Luminaire Power	27.00 W	Efficacy	83.96 lm/W	Efficiency	100.00%
Sources Flux	2266.93 lm	Maximum value	431.21 cd/klm	Position	C=45.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	236 mm	Width	236 mm	Height	185 mm
Rectangular Luminous Area		Length	170 mm	Width	170 mm	Height	0 mm
Horizontal Luminous Area		0.028900 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006992 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		29-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2266.93 lm	
LED Flux=3348lm LED Power=25W Eff=68% EfcLed=134lm/W EfcLum=84lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	52 82 96 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.06	2.12	3.18	4.24	5.30	OC	1.06	2.12	3.18	4.24	5.30
OB	1.06	2.12	3.18	4.24	5.30	OD	1.06	2.12	3.18	4.24	5.30

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	977.10	969.37	905.32	792.72	655.52	512.79	374.56	246.92	127.31	28.73
OB	977.10	969.37	905.32	792.72	655.52	512.79	374.56	246.92	127.31	28.73
OC	977.10	969.68	905.77	792.08	654.48	512.09	374.85	247.78	127.37	27.88
OD	977.10	969.68	905.77	792.08	654.48	512.09	374.85	247.78	127.37	27.88

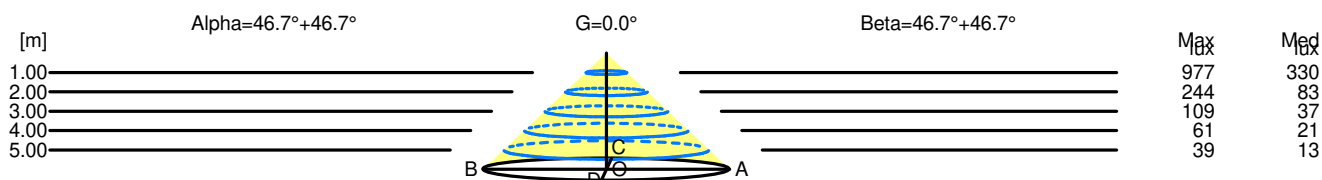

H[m]	D[m]	Max lux	Med lux	Alpha=46.7°+46.7°	G=0.0
1.00	2.12	977	330		
2.00	4.24	244	83		
3.00	6.36	109	37		
4.00	8.48	61	21		
5.00	10.60	39	13		

H[m]	D[m]	Max lux	Med lux	Beta=46.7°+46.7°	G=0.0
1.00	2.12	977	330		
2.00	4.24	244	83		
3.00	6.36	109	37		
4.00	8.49	61	21		
5.00	10.61	39	13		