


## Luminaire

Code BB12105+DV1018 + M239201  
 Name LUCERI Q TRIM max46W 940 MIRROR SILV. + Driver 35W DIM + schermo trasparente


## Measurem.

Code FTS1801246  
 Name LUCERI Q TRIM max46W 940 MIRROR SILV. + Driver 35W DIM + schermo trasparente

Luminaire Flux	2513.34 lm	Luminaire Power	27.00 W	Efficacy	93.09 lm/W	Efficiency	100.00%
Sources Flux	2513.34 lm	Maximum value	1073.64 cd/klm	Position	C=0.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	236 mm	Width	236 mm	Height	185 mm
Rectangular Luminous Area		Length	170 mm	Width	170 mm	Height	0 mm
Horizontal Luminous Area		0.028900 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006992 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2513.34 lm	
LED Flux=3348lm LED Power=25W Eff=75% EfcLed=134lm/W EfcLum=93lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	93 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

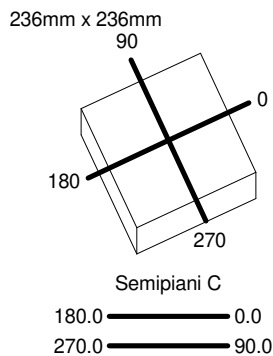

ULOR 0.00 %  
 DLOR100.00 %  
 RN 0.00 %

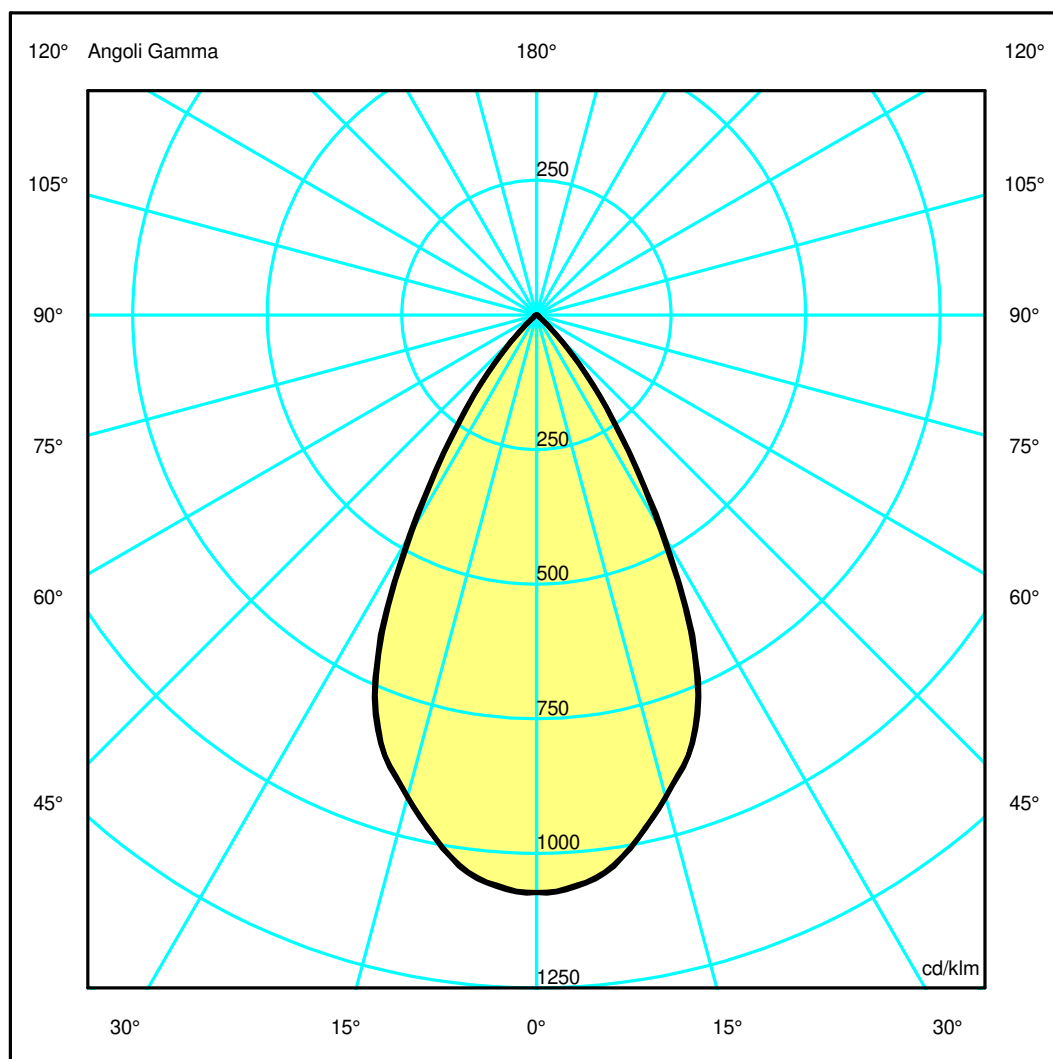

## Luminaire

Code BB12105+DV1018 + M239201  
 Name LUCERI Q TRIM max46W 940 MIRROR SILV. + Driver 35W DIM + schermo trasparente

## Measurem.


Code FTS1801246  
 Name LUCERI Q TRIM max46W 940 MIRROR SILV. + Driver 35W DIM + schermo trasparente

Luminaire Flux	2513.34 lm	Luminaire Power	27.00 W	Efficacy	93.09 lm/W	Efficiency	100.00%
Sources Flux	2513.34 lm	Maximum value	1073.64 cd/klm	Position	C=0.00 G=1.00	CG Double Symmetrical	
Rectangular Luminaire Rectangular Luminous Area		Length Length	236 mm 170 mm	Width Width	236 mm 170 mm	Height Height	185 mm 0 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.028900 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.006992 m2	
Coordinate system Date Measurement Distance		CG 21-06-2018 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Double Symmetrical 180 2513.34 lm	
LED Flux=3348lm LED Power=25W Eff=75% EfcLed=134lm/W EfcLum=93lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E. F UTE	93 99 100 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.54	1.08	1.62	2.17	2.71	OC	0.54	1.09	1.63	2.18	2.72
OB	0.54	1.08	1.62	2.17	2.71	OD	0.54	1.09	1.63	2.18	2.72

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2696.04	2660.56	2329.12	1744.02	675.64	134.12	15.61	9.74	6.88	3.59
OB	2696.04	2660.56	2329.12	1744.02	675.64	134.12	15.61	9.74	6.88	3.59
OC	2696.04	2657.40	2329.93	1754.09	692.68	142.40	16.87	10.34	7.08	3.46
OD	2696.04	2657.40	2329.93	1754.09	692.68	142.40	16.87	10.34	7.08	3.46

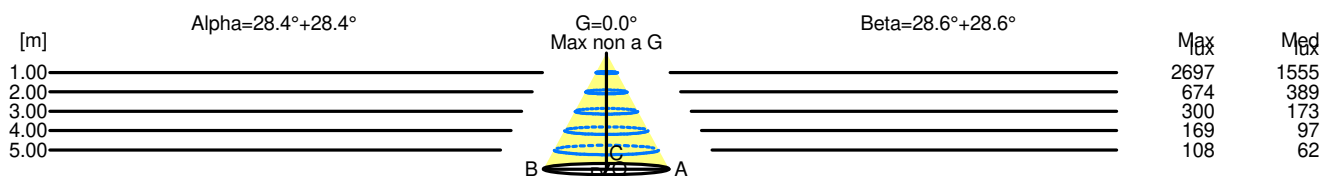

H[m]	D[m]	Max lux	Med lux	Alpha=28.4°+28.4°	G=0.0 Max non a G
1.00	1.08	2697	1555		
2.00	2.17	674	389		
3.00	3.25	300	173		
4.00	4.33	169	97		
5.00	5.41	108	62		

H[m]	D[m]	Max lux	Med lux	Beta=28.6°+28.6°	G=0.0 Max non a G
1.00	1.09	2697	1555		
2.00	2.18	674	389		
3.00	3.27	300	173		
4.00	4.36	169	97		
5.00	5.45	108	62		