

Luminaire


Code BZ02701IN0+BZ06004
 Name A.39 S/C SHARP REFR.DIR 1482 WIN DALIBCO+ A.39 S/C SHARP REFR KIT LOUVRES 1482 NRO

Measurement

Code FTS2103031
 Name A.39 S/C SHARP REFR.DIR 1482 WIN DALIBCO+ A.39 S/C SHARP REFR KIT LOUVRES 1482 NRO

Luminaire Flux	5232 lm	Luminaire Power	43.0 W	Efficacy	121.669 lm/W	Efficiency	100.00%
Source Flux	5232 lm	Maximum value	1168.42 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1480 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	1475 mm	Width	35 mm	Height	0 mm
Horizontal Luminous Area		0.051625 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.012489 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		14-12-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5232 lm	
LED Flux=6425lm LED Power=39W Eff=81% EfcLed=165lm/W EfcLum=122lm/W CCT=5000 Ra=90 SDCM=3 L70(9K)=50000h							
C.I.E.	98	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	


1480mm x 45mm



Semipiani C

180.0 — 0.0
 270.0 — 90.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

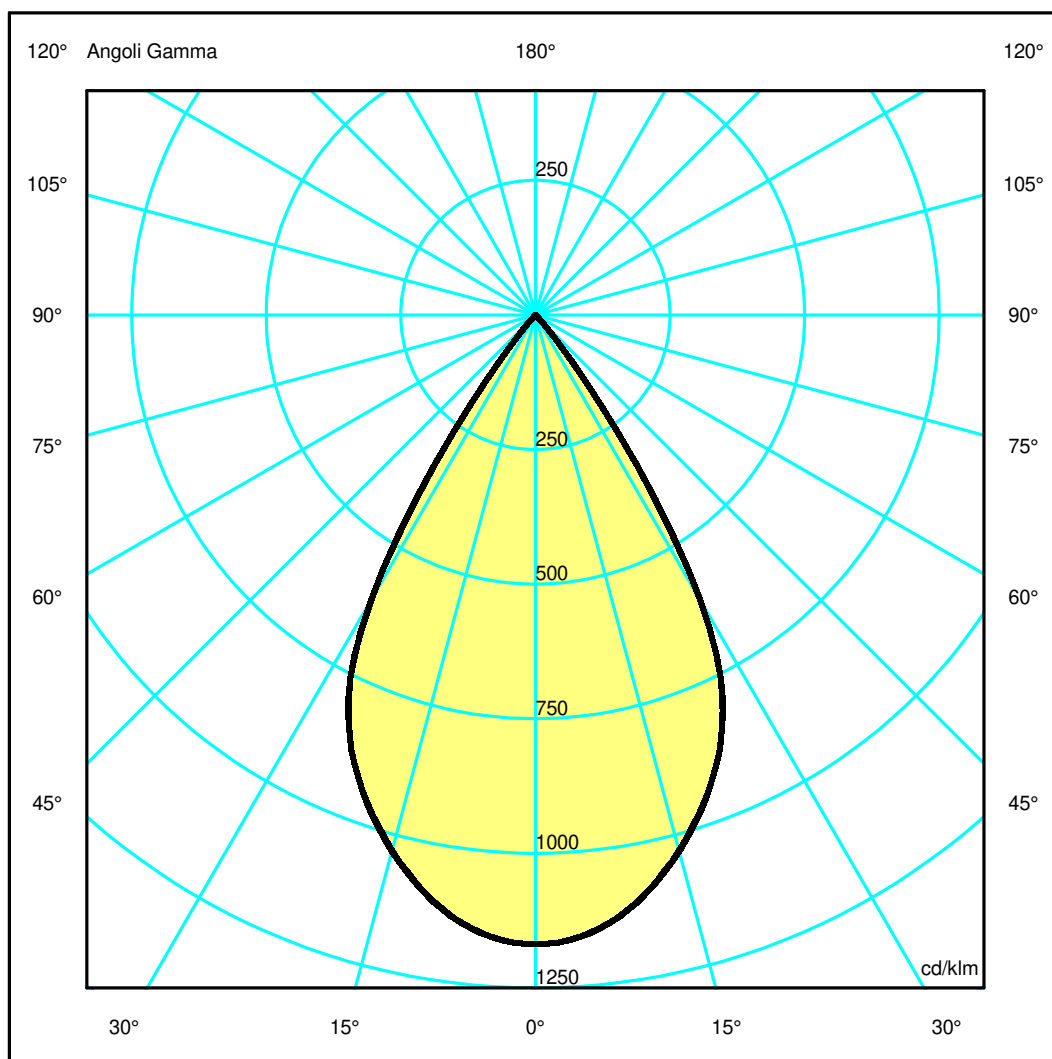

Luminaire

Code BZ02701IN0+BZ06004
 Name A.39 S/C SHARP REFR.DIR 1482 WIN DALIBCO+ A.39 S/C SHARP REFR KIT LOUVRES 1482 NRO

Measurement

Code FTS2103031
 Name A.39 S/C SHARP REFR.DIR 1482 WIN DALIBCO+ A.39 S/C SHARP REFR KIT LOUVRES 1482 NRO

Luminaire Flux	5232 lm	Luminaire Power	43.0 W	Efficacy	121.669 lm/W	Efficiency	100.00%
Source Flux	5232 lm	Maximum value	1168.42 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1480 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	1475 mm	Width	35 mm	Height	0 mm
Horizontal Luminous Area	0.051625 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.012489 m2	
Coordinate system	CG			Symmetry Type		Double Symmetrical	
Date	14-12-2021			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		5232 lm	


LED Flux=6425lm LED Power=39W Eff=81% EfcLed=165lm/W EfcLum=122lm/W CCT=5000 Ra=90 SDCM=3 L70(9K)=50000h

C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.59	1.17	1.76	2.35	2.94	OC	0.59	1.18	1.76	2.35	2.94
OB	0.59	1.17	1.76	2.35	2.94	OD	0.59	1.18	1.76	2.35	2.94

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6112.87	6026.63	5398.44	4300.36	1394.87	47.07	9.68	2.12	1.35	1.01
OB	6112.87	6026.63	5398.44	4300.36	1394.87	47.07	9.68	2.12	1.35	1.01
OC	6112.87	6032.64	5386.59	4303.00	1387.38	45.73	10.26	2.26	1.41	1.03
OD	6112.87	6032.64	5386.59	4303.00	1387.38	45.73	10.26	2.26	1.41	1.03

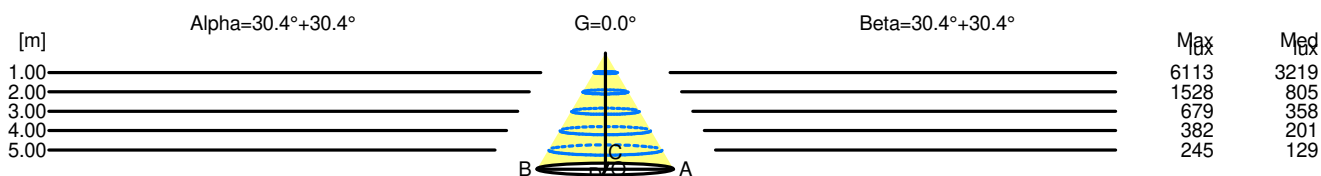

H[m]	D[m]	Max lux	Med lux	Alpha=30.4°+30.4°	G=0.0
1.00	1.17	6113	3219		
2.00	2.35	1528	805		
3.00	3.52	679	358		
4.00	4.70	382	201		
5.00	5.87	245	129		

H[m]	D[m]	Max lux	Med lux	Beta=30.4°+30.4°	G=0.0
1.00	1.18	6113	3219		
2.00	2.35	1528	805		
3.00	3.53	679	358		
4.00	4.70	382	201		
5.00	5.88	245	129		