

Luminaire

Code CA01004
Name GOPLE 60 SPOT TRK16 48V SP 3000K NRO

Measurement

Code FTS2200089
Name GOPLE 60 SPOT TRK16 48V SP 3000K NRO

Luminaire Flux	557 lm	Luminaire Power	9.0 W	Efficacy	61.943 lm/W	Efficiency	100.00%
Source Flux	557 lm	Maximum value	12591.81 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		557 lm	
LED Flux=688lm LED Power=8.4W Eff=81% EfcLed=82lm/W EfcLum=62lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	99 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Diam=55mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

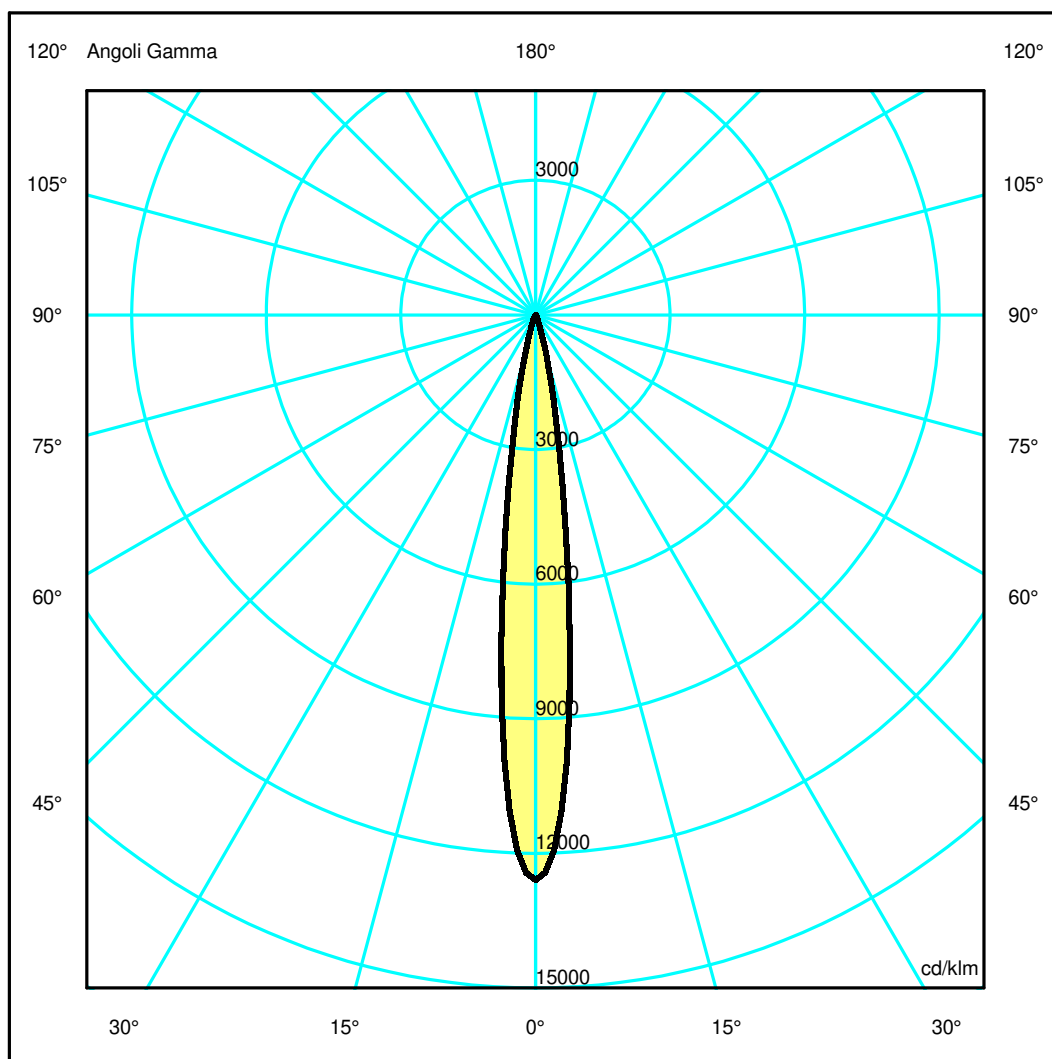

Luminaire

Code CA01004
Name GOPLE 60 SPOT TRK16 48V SP 3000K NRO

Measurerm.


Code FTS2200089
Name GOPLE 60 SPOT TRK16 48V SP 3000K NRO

Luminaire Flux	557 lm	Luminaire Power	9.0 W	Efficacy	61.943 lm/W	Efficiency	100.00%
Source Flux	557 lm	Maximum value	12591.81 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		557 lm	
LED Flux=688lm LED Power=8.4W Eff=81% EfcLed=82lm/W EfcLum=62lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100		D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.12	0.24	0.36	0.48	0.59	OC	0.12	0.24	0.36	0.48	0.59
OB	0.12	0.24	0.36	0.48	0.59	OD	0.12	0.24	0.36	0.48	0.59

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	7019.81	4840.26	515.40	62.06	16.99	4.70	1.54	0.24	0.00	0.00
OB	7019.81	4840.26	515.40	62.06	16.99	4.70	1.54	0.24	0.00	0.00
OC	7019.81	4840.26	515.40	62.06	16.99	4.70	1.54	0.24	0.00	0.00
OD	7019.81	4840.26	515.40	62.06	16.99	4.70	1.54	0.24	0.00	0.00

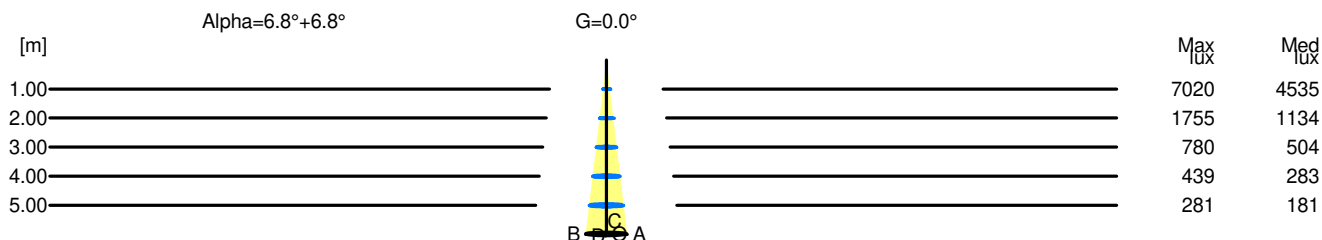

H[m]	D[m]	Max lux	Med lux	Alpha=6.8°+6.8°	G=0.0
1.00	0.24	7020	4535		
2.00	0.48	1755	1134		
3.00	0.71	780	504		
4.00	0.95	439	283		
5.00	1.19	281	181		