

## Luminaire

Code CA01204+AP90200  
 Name GOPLE 60 SPOT TRK16 48V WF 3000K NRO + VECTOR 40 - LENS FOR ELLIPTICAL EMISSION

## Measurement

Code FTS2200096  
 Name GOPLE 60 SPOT TRK16 48V WF 3000K NRO + VECTOR 40 - LENS FOR ELLIPTICAL EMISSION

Luminaire Flux	331 lm	Luminaire Power	9.0 W	Efficacy	36.761 lm/W	Efficiency	100.00%
Source Flux	331 lm	Maximum value	2688.01 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.000233 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		07-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		331 lm	

LED Flux=867lm LED Power=7.9W Eff=38% EfcLed=110lm/W EfcLum=37lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h

C.I.E. 95 99 100 100 100  
 F UTE 1.00 A

D DIN 5040  
 B NBN  
 A60  
 BZ 1



ULOR 0.00 %  
 DLOR100.00 %  
 RN 0.00 %



## Luminaire

Code CA01204+AP90200  
 Name GOPLE 60 SPOT TRK16 48V WF 3000K NRO + VECTOR 40 - LENS FOR ELLIPTICAL EMISSION

## Measurement

Code FTS2200096  
 Name GOPLE 60 SPOT TRK16 48V WF 3000K NRO + VECTOR 40 - LENS FOR ELLIPTICAL EMISSION

Luminaire Flux	331 lm	Luminaire Power	9.0 W	Efficacy	36.761 lm/W	Efficiency	100.00%
Source Flux	331 lm	Maximum value	2688.01 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		07-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		331 lm	


LED Flux=867lm LED Power=7.9W Eff=38% EfcLed=110lm/W EfcLum=37lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h

C.I.E.	95 99 100 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.23	0.47	0.70	0.93	1.17	OC	0.34	0.68	1.02	1.36	1.70
OB	0.23	0.47	0.70	0.93	1.17	OD	0.34	0.68	1.02	1.36	1.70

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	889.33	804.09	359.76	94.03	22.11	5.91	1.89	1.11	0.69	0.23
OB	889.33	804.09	359.76	94.03	22.11	5.91	1.89	1.11	0.69	0.23
OC	889.33	844.04	564.87	276.63	102.82	27.60	12.74	6.89	1.45	0.25
OD	889.33	844.04	564.87	276.63	102.82	27.60	12.74	6.89	1.45	0.25

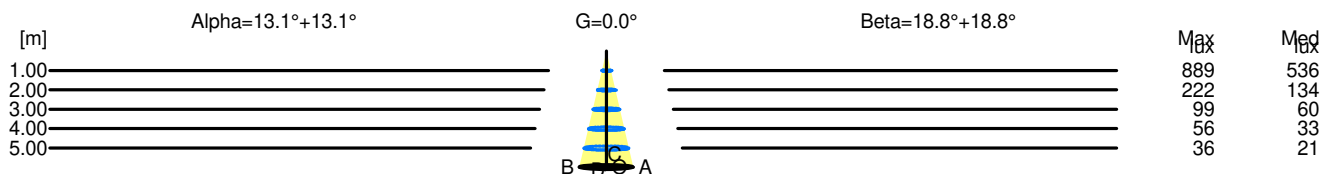

H[m]	D[m]	Max lux	Med lux	Alpha=13.1°+13.1°	G=0.0
1.00	0.47	889	536		
2.00	0.93	222	134		
3.00	1.40	99	60		
4.00	1.86	56	33		
5.00	2.33	36	21		

H[m]	D[m]	Max lux	Med lux	Beta=18.8°+18.8°	G=0.0
1.00	0.68	889	536		
2.00	1.36	222	134		
3.00	2.04	99	60		
4.00	2.72	56	33		
5.00	3.40	36	21		