

## Luminaire

Code CA12101+AP91400  
 Name GOPLE 80 SPOT TRK16 48V FL 4000K BCO + VECTOR 55 - ANTI-DUZZLE LOUVRE

## Measurement

Code FTS2200067  
 Name GOPLE 80 SPOT TRK16 48V FL 4000K BCO + VECTOR 55 - ANTI-DUZZLE LOUVRE

Luminaire Flux	1015 lm	Luminaire Power	23.0 W	Efficacy	44.148 lm/W	Efficiency	100.00%
Source Flux	1015 lm	Maximum value	6688.13 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	77 mm	Height	150 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area			0.001662 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.000402 m2
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		01-03-2022		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			1015 lm
LED Flux=2473lm LED Power=22W Eff=41% EfcLed=114lm/W EfcLum=44lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	100	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	


Diam=77mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

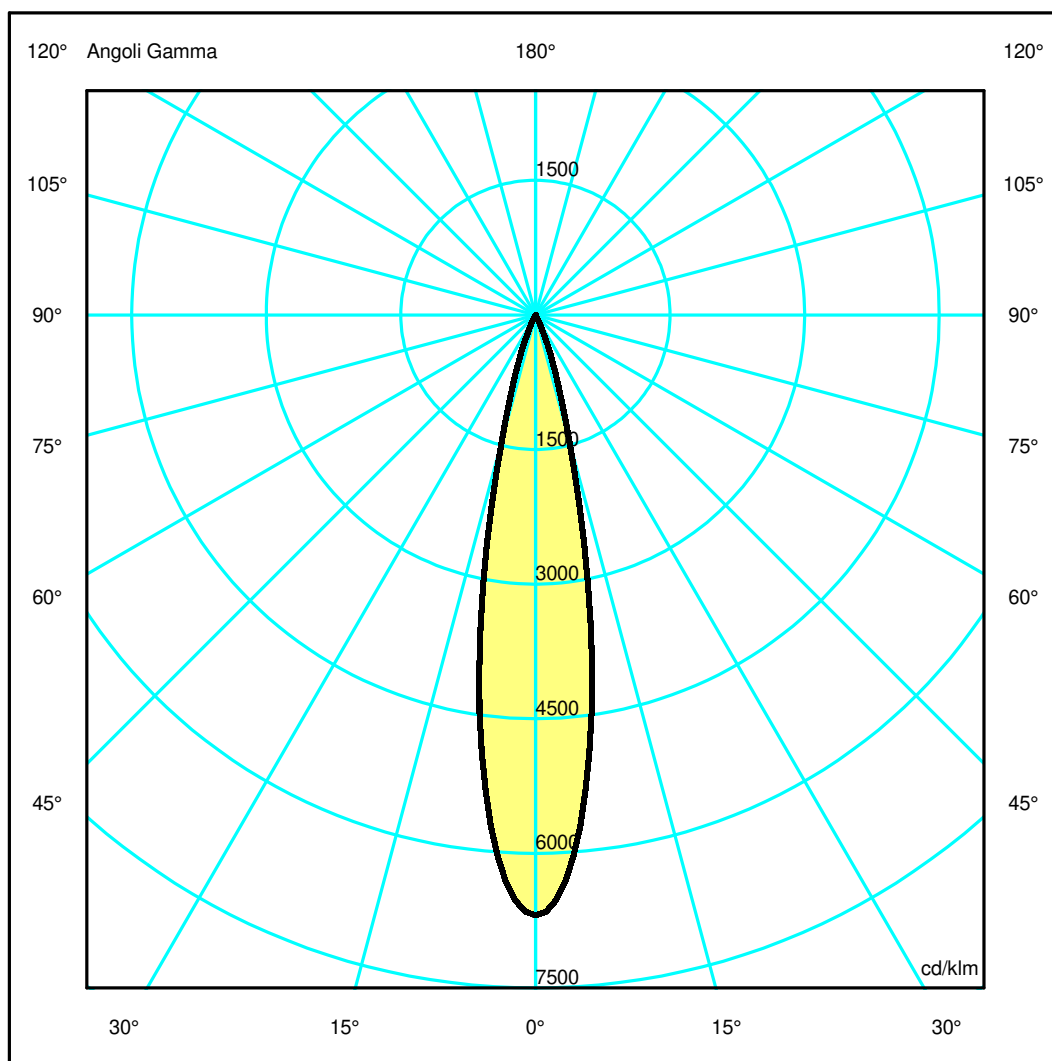

## Luminaire

Code CA12101+AP91400  
 Name GOPLE 80 SPOT TRK16 48V FL 4000K BCO + VECTOR 55 - ANTI-DUZZLE LOUVRE

## Measurerm.

Code FTS2200067  
 Name GOPLE 80 SPOT TRK16 48V FL 4000K BCO + VECTOR 55 - ANTI-DUZZLE LOUVRE

Luminaire Flux	1015 lm	Luminaire Power	23.0 W	Efficacy	44.148 lm/W	Efficiency	100.00%
Source Flux	1015 lm	Maximum value	6688.13 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	77 mm	Height	150 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000402 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		01-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1015 lm	


LED Flux=2473lm LED Power=22W Eff=41% EfcLed=114lm/W EfcLum=44lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h

C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.37	0.55	0.74	0.92	OC	0.18	0.37	0.55	0.74	0.92
OB	0.18	0.37	0.55	0.74	0.92	OD	0.18	0.37	0.55	0.74	0.92

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	6791.20	5801.80	1486.82	136.29	13.18	3.62	1.27	0.40	0.30	0.23
OB	6791.20	5801.80	1486.82	136.29	13.18	3.62	1.27	0.40	0.30	0.23
OC	6791.20	5801.80	1486.82	136.29	13.18	3.62	1.27	0.40	0.30	0.23
OD	6791.20	5801.80	1486.82	136.29	13.18	3.62	1.27	0.40	0.30	0.23

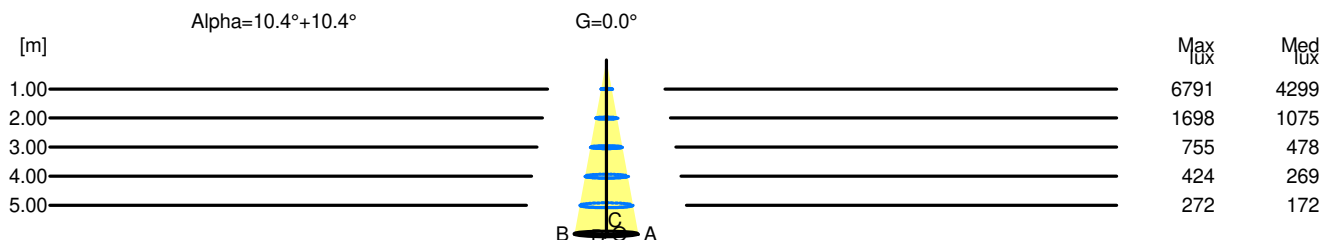

H[m]	D[m]	Max lux	Med lux	Alpha=10.4°+10.4°	G=0.0
1.00	0.37	6791	4299		
2.00	0.74	1698	1075		
3.00	1.10	755	478		
4.00	1.47	424	269		
5.00	1.84	272	172		