


Luminaire

Code TC53304+AP90200
 Name GOPLE 60 PENDANT TRK12 940 WF BLACK + LENS FOR ELLIPTICAL EMISSION


Measurement

Code FTS2200215
 Name GOPLE 60 PENDANT TRK12 940 WF BLACK + LENS FOR ELLIPTICAL EMISSION

Luminaire Flux	355 lm	Luminaire Power	10.0 W	Efficacy	35.451 lm/W	Efficiency	100.00%
Source Flux	355 lm	Maximum value	2688.01 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area			0.000962 m ²	Emitting area on Plane 180°			0.000000 m ²
Emitting area on Plane 0°			0.000000 m ²	Emitting area on Plane 270°			0.000000 m ²
Emitting area on Plane 90°			0.000000 m ²	Glare area at 76°			0.000233 m ²
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-09-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		355 lm	
LED Flux=929lm LED Power=7.9W Eff=38% EfcLed=117lm/W EfcLum=35lm/W CCT=4000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h							
C.I.E.	95 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

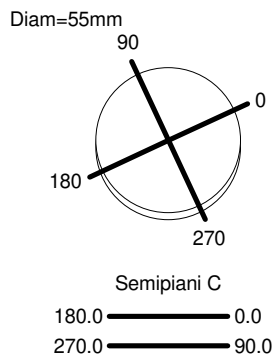

ULOR 0.00 %
 DLOR100.00 %
 RN 0.00 %

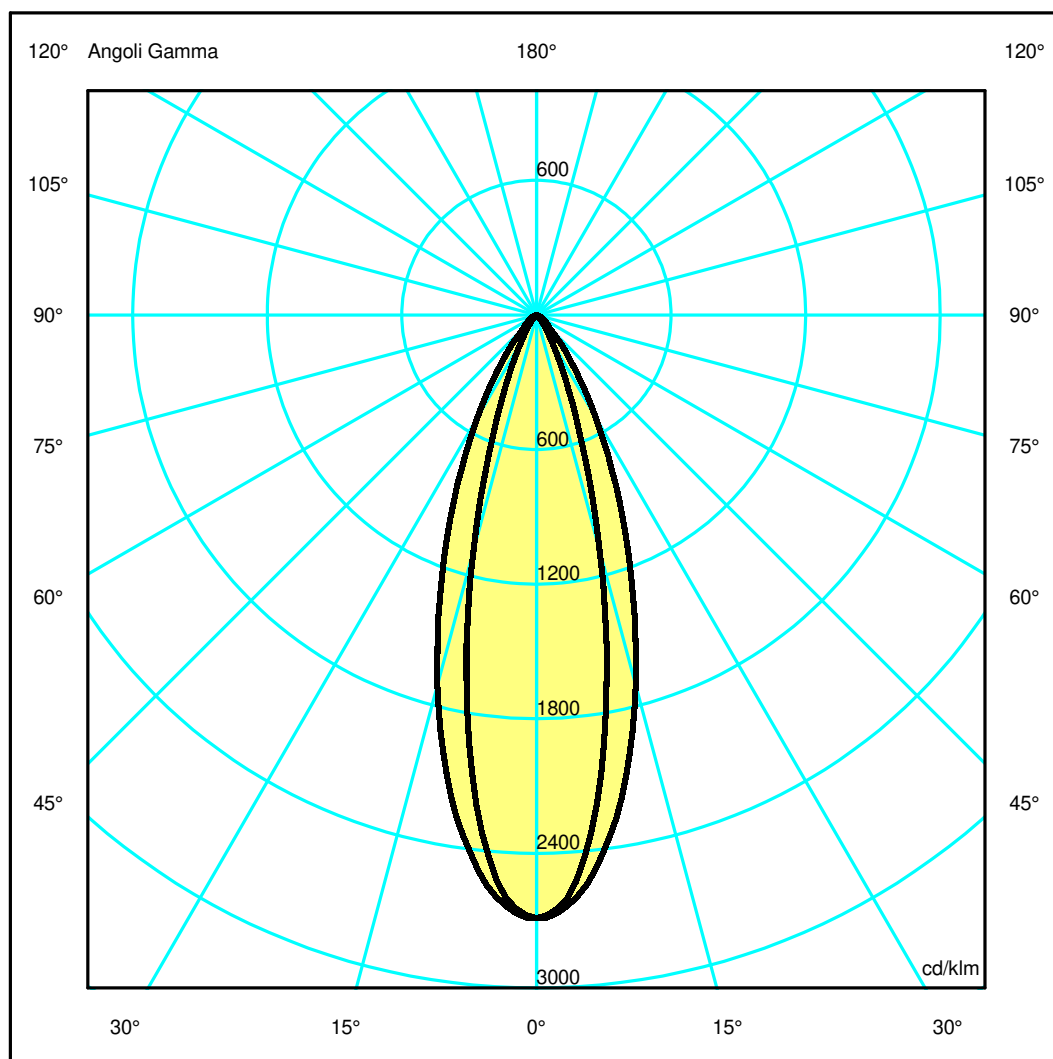

Luminaire

Code TC53304+AP90200
Name GOPLE 60 PENDANT TRK12 940 WF BLACK + LENS FOR ELLIPTICAL EMISSION

Measurerm.

Code FTS2200215
Name GOPLE 60 PENDANT TRK12 940 WF BLACK + LENS FOR ELLIPTICAL EMISSION

Luminaire Flux	355 lm	Luminaire Power	10.0 W	Efficacy	35.451 lm/W	Efficiency	100.00%
Source Flux	355 lm	Maximum value	2688.01 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-09-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		355 lm	


LED Flux=929lm LED Power=7.9W Eff=38% EfcLed=117lm/W EfcLum=35lm/W CCT=4000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h

C.I.E.	95 99 100 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.23	0.47	0.70	0.93	1.17	OC	0.34	0.68	1.02	1.36	1.70
OB	0.23	0.47	0.70	0.93	1.17	OD	0.34	0.68	1.02	1.36	1.70

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	952.93	861.59	385.48	100.75	23.69	6.33	2.03	1.19	0.74	0.25
OB	952.93	861.59	385.48	100.75	23.69	6.33	2.03	1.19	0.74	0.25
OC	952.93	904.40	605.27	296.42	110.18	29.57	13.65	7.39	1.55	0.27
OD	952.93	904.40	605.27	296.42	110.18	29.57	13.65	7.39	1.55	0.27

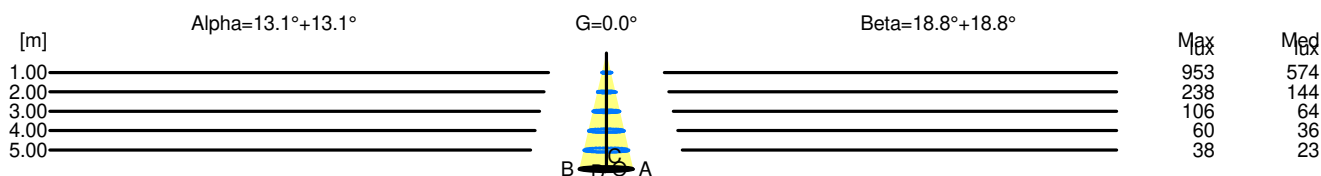

H[m]	D[m]	Max lux	Med lux	Alpha=13.1°+13.1°	G=0.0
1.00	0.47	953	574		
2.00	0.93	238	144		
3.00	1.40	106	64		
4.00	1.86	60	36		
5.00	2.33	38	23		

H[m]	D[m]	Max lux	Med lux	Beta=18.8°+18.8°	G=0.0
1.00	0.68	953	574		
2.00	1.36	238	144		
3.00	2.04	106	64		
4.00	2.72	60	36		
5.00	3.40	38	23		