

## Luminaire

Code CD100104+BZ06304  
 Name A.39 SHARP REFR SMD 3K 600X600 DALI NRO + A.39 SHARP REFR KIT LOUVRES NRO 600x600

## Measurement

Code FTS2200012-A  
 Name A.39 SHARP REFR SMD 3K 600X600 DALI NRO + A.39 SHARP REFR KIT LOUVRES NRO 600x600


Luminaire Flux	3363 lm	Luminaire Power	28.0 W	Efficacy	120.108 lm/W	Efficiency	100.00%
Source Flux	3363 lm	Maximum value	1178.66 cd/klm	Position	C=40.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	600 mm	Width	600 mm	Height	30 mm
Rectangular Luminous Area		Length	280 mm	Width	105 mm	Height	0 mm
Horizontal Luminous Area		0.029400 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.007113 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		01-12-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3363 lm	

LED Flux=4180lm LED Power=23W Eff=80% EfcLed=179lm/W EfcLum=120lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h

C.I.E. 99 100 100 100 100  
 F UTE --

D DIN 5040  
 B NBN

A60  
 BZ 1

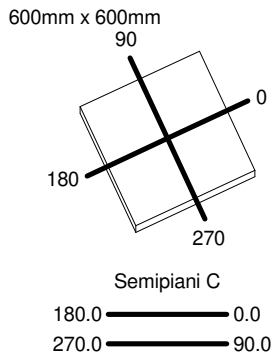

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

