

## Luminaire

Code 1215J00A  
Name AOL MINI W J UPPERCASE

## Measurement

Code FTS2400016  
Name AOL MINI W J UPPERCASE

Luminaire Flux	781 lm	Luminaire Power	8.0 W	Efficacy	97.625 lm/W	Efficiency	100.00%
Source Flux	781 lm	Maximum value	186.86 cd/klm	Position	C=110.00 G=2.00	CG	Asymmetrical
Rectangular Luminaire		Length	355 mm	Width	245 mm	Height	42 mm
Rectangular Luminous Area		Length	355 mm	Width	50 mm	Height	25 mm
Horizontal Luminous Area		0.017750 m <sup>2</sup>		Emitting area on Plane 180°		0.008875 m <sup>2</sup>	
Emitting area on Plane 0°		0.008875 m <sup>2</sup>		Emitting area on Plane 270°		0.001250 m <sup>2</sup>	
Emitting area on Plane 90°		0.001250 m <sup>2</sup>		Glare area at 76°		0.012905 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		19-12-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		781 lm	


LED Flux=986lm LED Power=8W Eff=79% EfcLed=123lm/W EfcLum=98lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E. 36 65 86 72 100  
F UTE 0.72 H + 0.28 T

D DIN 5040  
B NBN

B21  
BZ 6


355mm x 245mm



Semipiani C

180.0 — 0.0  
270.0 — 90.0

ULOR 27.80 %  
DLOR 72.20 %  
RN 27.80 %

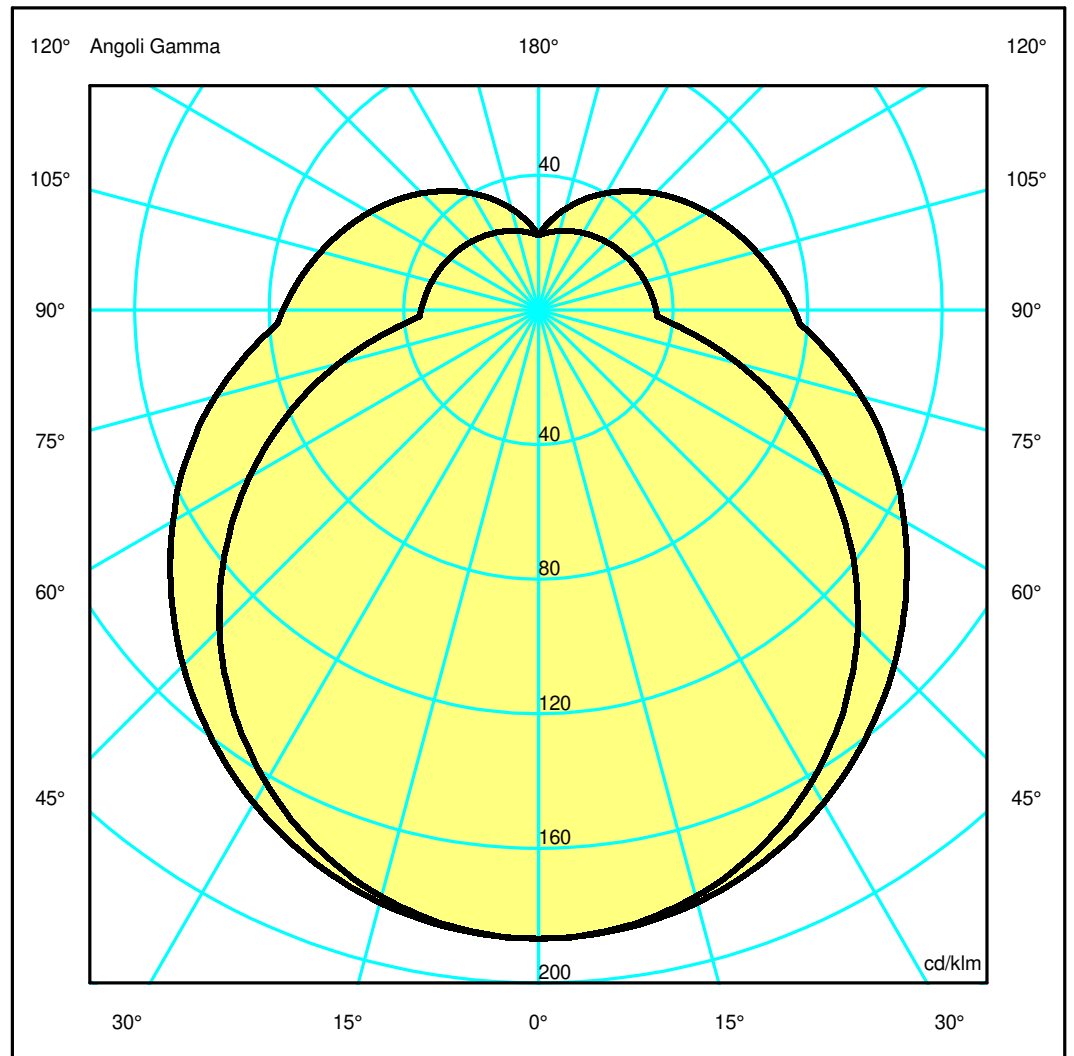

## Luminaire

Code 1215J00A  
Name AOL MINI W J UPPERCASE

## Measurment

Code FTS2400016  
Name AOL MINI W J UPPERCASE

Luminaire Flux	781 lm	Luminaire Power	8.0 W	Efficacy	97.625 lm/W	Efficiency	100.00%
Source Flux	781 lm	Maximum value	186.86 cd/klm	Position	C=110.00 G=2.00	CG	Asymmetrical
Rectangular Luminaire		Length	355 mm	Width	245 mm	Height	42 mm
Rectangular Luminous Area		Length	355 mm	Width	50 mm	Height	25 mm
Horizontal Luminous Area		0.017750 m <sup>2</sup>		Emitting area on Plane 180°		0.008875 m <sup>2</sup>	
Emitting area on Plane 0°		0.008875 m <sup>2</sup>		Emitting area on Plane 270°		0.001250 m <sup>2</sup>	
Emitting area on Plane 90°		0.001250 m <sup>2</sup>		Glare area at 76°		0.012905 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		19-12-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		781 lm	


LED Flux=986lm LED Power=8W Eff=79% EfcLed=123lm/W EfcLum=98lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E.	36 65 86 72 100	D DIN 5040	B21
F UTE	0.72 H + 0.28 T	B NBN	BZ 6

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	4.80	9.60	14.40	19.21	24.01	OC	1.91	3.81	5.72	7.62	9.53
OB	4.80	9.60	14.40	19.21	24.01	OD	1.91	3.81	5.72	7.62	9.53

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	145.91	145.47	142.42	136.35	127.51	116.68	104.45	91.65	77.66	63.36
OB	145.91	145.47	142.42	136.35	127.51	116.68	104.45	91.65	77.66	63.36
OC	145.91	145.25	140.93	132.35	120.21	104.80	87.09	67.76	47.97	30.21
OD	145.91	145.25	140.93	132.35	120.21	104.80	87.09	67.76	47.97	30.21

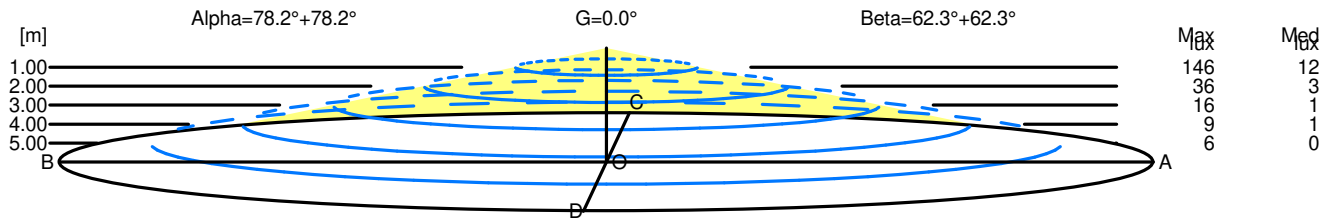

H[m]	D[m]	Max lux	Med lux	Alpha=78.2°+78.2°	G=0.0
1.00	9.60	146	12		
2.00	19.21	36	3		
3.00	28.81	16	1		
4.00	38.41	9	1		
5.00	48.01	6	0		

H[m]	D[m]	Max lux	Med lux	Beta=62.3°+62.3°	G=0.0
1.00	3.81	146	12		
2.00	7.62	36	3		
3.00	11.43	16	1		
4.00	15.25	9	1		
5.00	19.06	6	0		