


Luminaire

Code FU90104
Name SHARPING 12 PENDANT FUNIVIA 927 XF NRO

Measurement

Code FTS2200030
Name SHARPING 12 PENDANT FUNIVIA 927 XF NRO

| | | | | | | | |
|--|---------|-----------------|----------------|-----------------------------|---------------|--------------------|--------------------|
| Luminaire Flux | 2232 lm | Luminaire Power | 25.0 W | Efficacy | 89.299 lm/W | Efficiency | 100.00% |
| Source Flux | 2232 lm | Maximum value | 1052.56 cd/klm | Position | C=0.00 G=0.00 | CG | Double Symmetrical |
| Rectangular Luminaire | | Length | 465 mm | Width | 28 mm | Height | 20 mm |
| Rectangular Luminous Area | | Length | 240 mm | Width | 20 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.004800 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.001161 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 15-02-2022 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 2232 lm | |
| LED Flux=2580lm LED Power=24W Eff=87% EfcLed=109lm/W EfcLum=89lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=36000h | | | | | | | |
| C.I.E. | 98 | 100 | 100 | 100 | D DIN 5040 | A60 | |
| F UTE | -- | | | | B NBN | BZ 1 | |

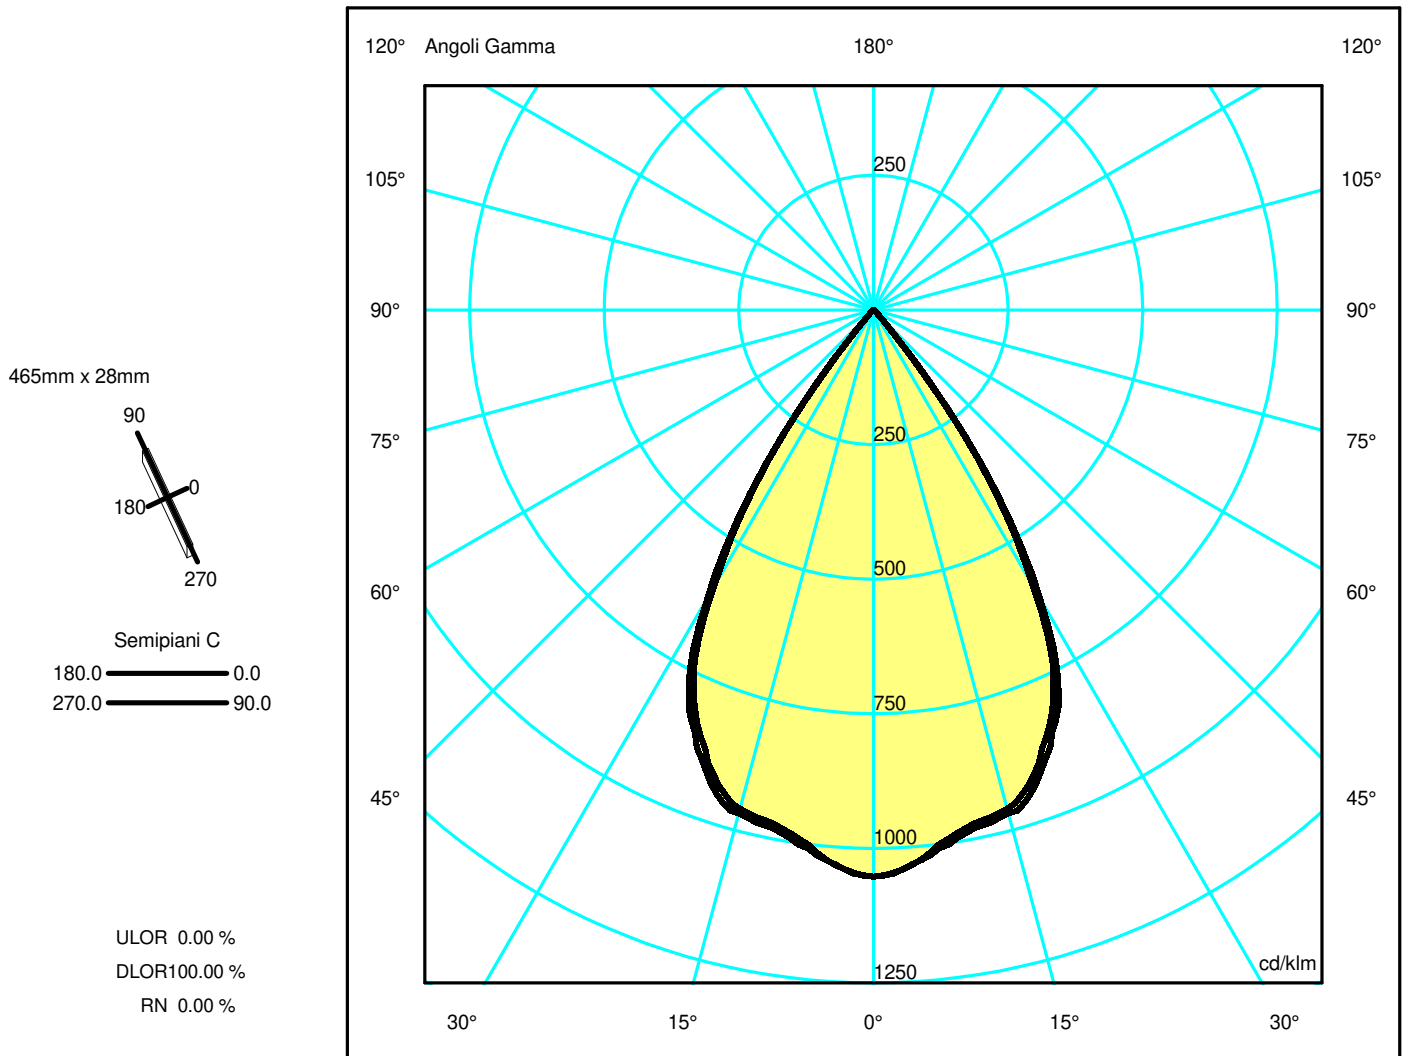

Luminaire

Code FU90104
Name SHARPING 12 PENDANT FUNIVIA 927 XF NRO

Measurerm.


Code FTS2200030
Name SHARPING 12 PENDANT FUNIVIA 927 XF NRO

| | | | | | | | |
|--|--------------------|-----------------|----------------|-----------------------------|--------------------|------------|--------------------|
| Luminaire Flux | 2232 lm | Luminaire Power | 25.0 W | Efficacy | 89.299 lm/W | Efficiency | 100.00% |
| Source Flux | 2232 lm | Maximum value | 1052.56 cd/klm | Position | C=0.00 G=0.00 | CG | Double Symmetrical |
| Rectangular Luminaire | | Length | 465 mm | Width | 28 mm | Height | 20 mm |
| Rectangular Luminous Area | | Length | 240 mm | Width | 20 mm | Height | 0 mm |
| Horizontal Luminous Area | 0.004800 m2 | | | Emitting area on Plane 180° | 0.000000 m2 | | |
| Emitting area on Plane 0° | 0.000000 m2 | | | Emitting area on Plane 270° | 0.000000 m2 | | |
| Emitting area on Plane 90° | 0.000000 m2 | | | Glare area at 76° | 0.001161 m2 | | |
| Coordinate system | CG | | | Symmetry Type | Double Symmetrical | | |
| Date | 15-02-2022 | | | Maximum Gamma Angle | 180 | | |
| Measurement Distance | 0.00 | | | Measurement Flux | 2232 lm | | |
| LED Flux=2580lm LED Power=24W Eff=87% EfcLed=109lm/W EfcLum=89lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=36000h | | | | | | | |
| C.I.E. | 98 100 100 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | -- | | | B NBN | BZ 1 | | |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 0.61 | 1.22 | 1.83 | 2.44 | 3.05 | OC | 0.62 | 1.24 | 1.87 | 2.49 | 3.11 |
| OB | 0.61 | 1.22 | 1.83 | 2.44 | 3.05 | OD | 0.62 | 1.24 | 1.87 | 2.49 | 3.11 |

| | | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|---------|---------------------------------|---------|---------|--------|-------|------|------|------|------|------|
| | | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 2349.80 | 2285.80 | 2140.16 | 1766.11 | 756.98 | 28.86 | 6.08 | 1.62 | 0.00 | 0.00 | 0.00 |
| OB | 2349.80 | 2285.80 | 2140.16 | 1766.11 | 756.98 | 28.86 | 6.08 | 1.62 | 0.00 | 0.00 | 0.00 |
| OC | 2349.80 | 2288.59 | 2160.14 | 1815.56 | 787.08 | 28.02 | 6.02 | 1.72 | 0.00 | 0.00 | 0.00 |
| OD | 2349.80 | 2288.59 | 2160.14 | 1815.56 | 787.08 | 28.02 | 6.02 | 1.72 | 0.00 | 0.00 | 0.00 |

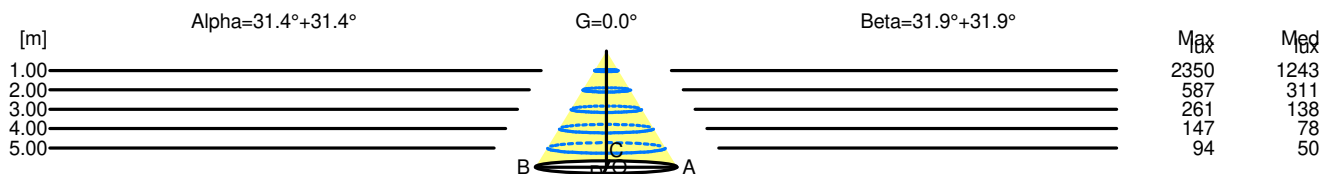

| H[m] | D[m] | Max lux | Med lux | Alpha=31.4°+31.4° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 1.22 | 2350 | 1243 | | |
| 2.00 | 2.44 | 587 | 311 | | |
| 3.00 | 3.66 | 261 | 138 | | |
| 4.00 | 4.88 | 147 | 78 | | |
| 5.00 | 6.10 | 94 | 50 | | |

| H[m] | D[m] | Max lux | Med lux | Beta=31.9°+31.9° | G=0.0 |
|------|------|---------|---------|------------------|-------|
| 1.00 | 1.24 | 2350 | 1243 | | |
| 2.00 | 2.49 | 587 | 311 | | |
| 3.00 | 3.73 | 261 | 138 | | |
| 4.00 | 4.98 | 147 | 78 | | |
| 5.00 | 6.22 | 94 | 50 | | |