

Luminaire


Code AQ14618+AQ16XXX
 Name A.24 GIUNTO X SOSP. DIFF. DIR. 4000K BCP + A.24 SCHERMO DIFF. OPALINO

Measurement

Code FTS2300209
 Name A.24 GIUNTO X SOSP. DIFF. DIR. 4000K BCP + A.24 SCHERMO DIFF. OPALINO

Luminaire Flux	2648 lm	Luminaire Power	29.0 W	Efficacy	91.310 lm/W	Efficiency	100.00%
Source Flux	2648 lm	Maximum value	348.02 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	605 mm	Width	605 mm	Height	55 mm
Rectangular Luminous Area		Length	605 mm	Width	48 mm	Height	0 mm
Horizontal Luminous Area		0.029040 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.007025 m ²	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2648 lm	
LED Flux=4976lm LED Power=27W Eff=53% EfcLed=187lm/W EfcLum=91lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=102000h							
C.I.E.	47 78 96 100 100			D DIN 5040	A30		
F UTE	1.00 E			B NBN	BZ 5 / 4 / BZ 4		

605mm x 605mm




Semipiani C

180.0 ——— 0.0

ULOR 0.01 %

DLOR 99.99 %

RN 0.01 %

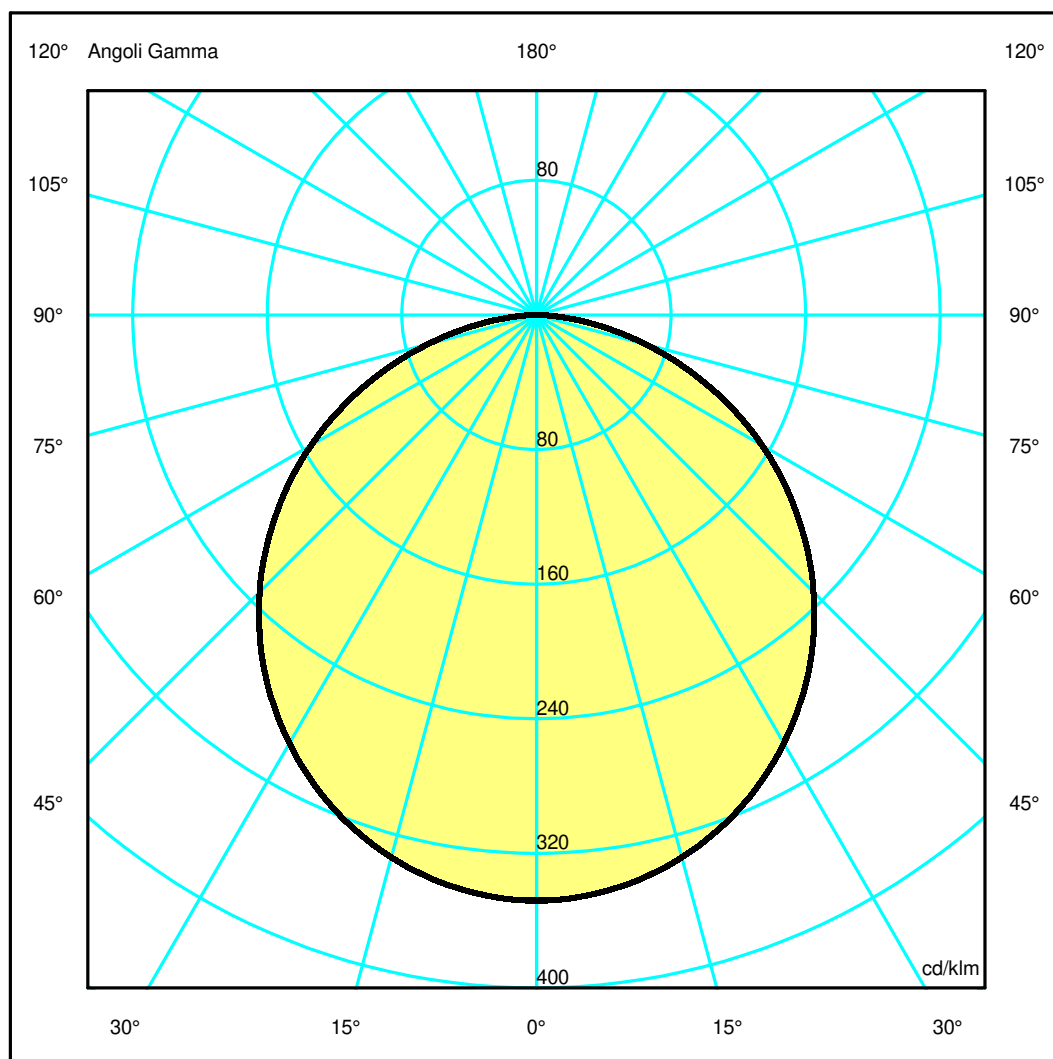

Luminaire

Code AQ14618+AQ16XXX
 Name A.24 GIUNTO X SOSP. DIFF. DIR. 4000K BCP + A.24 SCHERMO DIFF. OPALINO

Measurerm.

Code FTS2300209
 Name A.24 GIUNTO X SOSP. DIFF. DIR. 4000K BCP + A.24 SCHERMO DIFF. OPALINO

Luminaire Flux	2648 lm	Luminaire Power	29.0 W	Efficacy	91.310 lm/W	Efficiency	100.00%
Source Flux	2648 lm	Maximum value	348.02 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	605 mm	Width	605 mm	Height	55 mm
Rectangular Luminous Area		Length	605 mm	Width	48 mm	Height	0 mm
Horizontal Luminous Area		0.029040 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.007025 m ²	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2648 lm	


LED Flux=4976lm LED Power=27W Eff=53% EfcLed=187lm/W EfcLum=91lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=102000h

C.I.E.	47 78 96 100 100	D DIN 5040	A30
F UTE	1.00 E	B NBN	BZ 5 / 4 / BZ 4

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.51	3.03	4.54	6.05	7.56	OC	1.51	3.03	4.54	6.05	7.56
OB	1.51	3.03	4.54	6.05	7.56	OD	1.51	3.03	4.54	6.05	7.56

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	921.55	916.99	883.52	820.22	730.58	616.53	482.57	333.76	177.40	44.50
OB	921.55	916.99	883.52	820.22	730.58	616.53	482.57	333.76	177.40	44.50
OC	921.55	916.99	883.52	820.22	730.58	616.53	482.57	333.76	177.40	44.50
OD	921.55	916.99	883.52	820.22	730.58	616.53	482.57	333.76	177.40	44.50

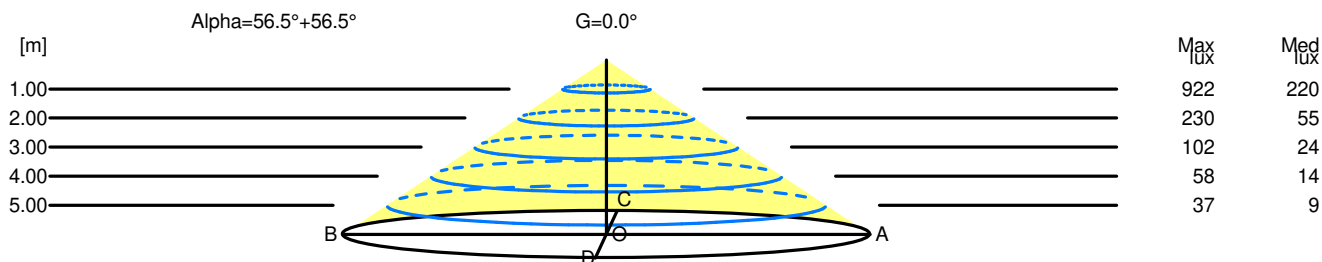

H[m]	D[m]	Max lux	Med lux	Alpha=56.5°+56.5°	G=0.0
1.00	3.03	922	220		
2.00	6.05	230	55		
3.00	9.08	102	24		
4.00	12.10	58	14		
5.00	15.13	37	9		