

## Luminaire

Code BT06115\_W  
Name VECTOR 75 3P DALI8 TW SP BSV

## Measurerm.

Code FTS2300001  
Name VECTOR 75 3P DALI8 TW SP BSV

Luminaire Flux	1623 lm	Luminaire Power	26.0 W	Efficacy	62.418 lm/W	Efficiency	100.00%
Source Flux	1623 lm	Maximum value	7942.69 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	75 mm	Height	200 mm		
Round Luminous Area		Diam.	60 mm	Height	0 mm		
Horizontal Luminous Area		0.002827 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000684 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		16-12-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1623 lm	
LED Flux=2140lm LED Power=21W Eff=76% EfcLed=100lm/W EfcLum=62lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9K)=50000h							
C.I.E.	100	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

Diam=75mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

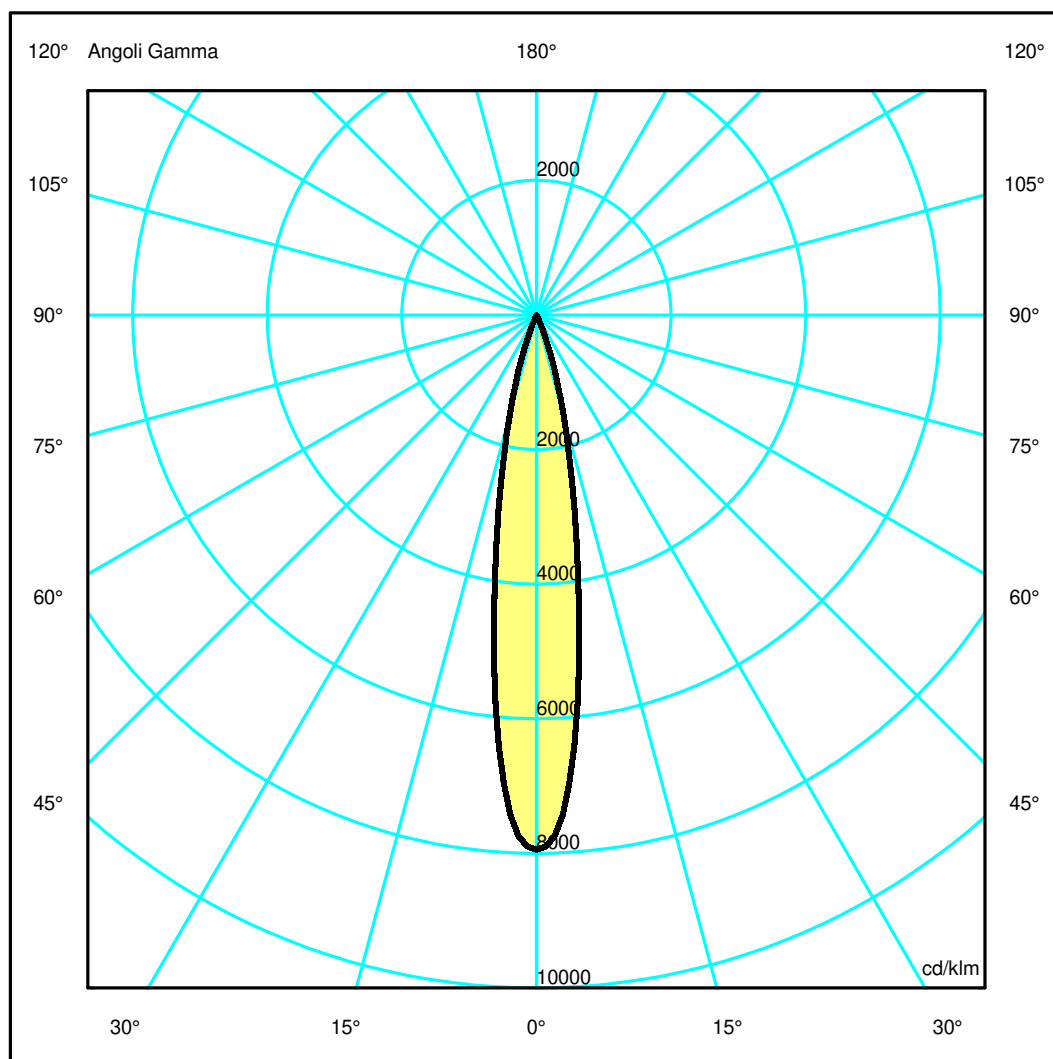

## Luminaire

Code BT06115\_W  
Name VECTOR 75 3P DALI8 TW SP BSV

## Measur.


Code FTS2300001  
Name VECTOR 75 3P DALI8 TW SP BSV

Luminaire Flux	1623 lm	Luminaire Power	26.0 W	Efficacy	62.418 lm/W	Efficiency	100.00%
Source Flux	1623 lm	Maximum value	7942.69 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	75 mm	Height	200 mm		
Round Luminous Area		Diam.	60 mm	Height	0 mm		
Horizontal Luminous Area		0.002827 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000684 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		16-12-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1623 lm	
LED Flux=2140lm LED Power=21W Eff=76% EfcLed=100lm/W EfcLum=62lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9K)=50000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.16	0.32	0.47	0.63	0.79	OC	0.16	0.32	0.47	0.63	0.79
OB	0.16	0.32	0.47	0.63	0.79	OD	0.16	0.32	0.47	0.63	0.79

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	12889.95	10433.78	2518.45	44.20	6.85	1.68	0.93	0.67	0.48	0.29
OB	12889.95	10433.78	2518.45	44.20	6.85	1.68	0.93	0.67	0.48	0.29
OC	12889.95	10433.78	2518.45	44.20	6.85	1.68	0.93	0.67	0.48	0.29
OD	12889.95	10433.78	2518.45	44.20	6.85	1.68	0.93	0.67	0.48	0.29

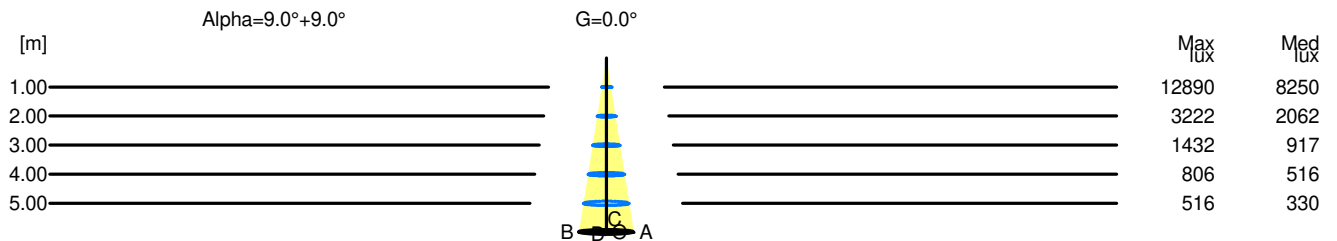

H[m]	D[m]	Max lux	Med lux	Alpha=9.0°+9.0°	G=0.0
1.00	0.32	12890	8250		
2.00	0.63	3222	2062		
3.00	0.95	1432	917		
4.00	1.26	806	516		
5.00	1.58	516	330		