

## Luminaire

Code KZ73204  
Name kata metron pst spot1x40Dali 940 WF nro

## Measurement

Code FTS2400420.  
Name kata metron pst spot1x40Dali 940 WF nro

Luminaire Flux	580 lm	Luminaire Power	11.0 W	Efficacy	52.727 lm/W	Efficiency	100.00%
Source Flux	580 lm	Maximum value	3590.26 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	40 mm 33 mm	Width Height	40 mm 0 mm	Height	103 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.000855 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000207 m2	
Coordinate system Date Measurement Distance		CG 21-06-2024 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 580 lm	
LED Flux=929lm LED Power=8W Eff=62% EfcLed=118lm/W EfcLum=53lm/W CCT=4000K Ra=90 R9=50 SDCM=2 L70(9k)=50000h							
C.I.E. F UTE	98 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		


40mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %

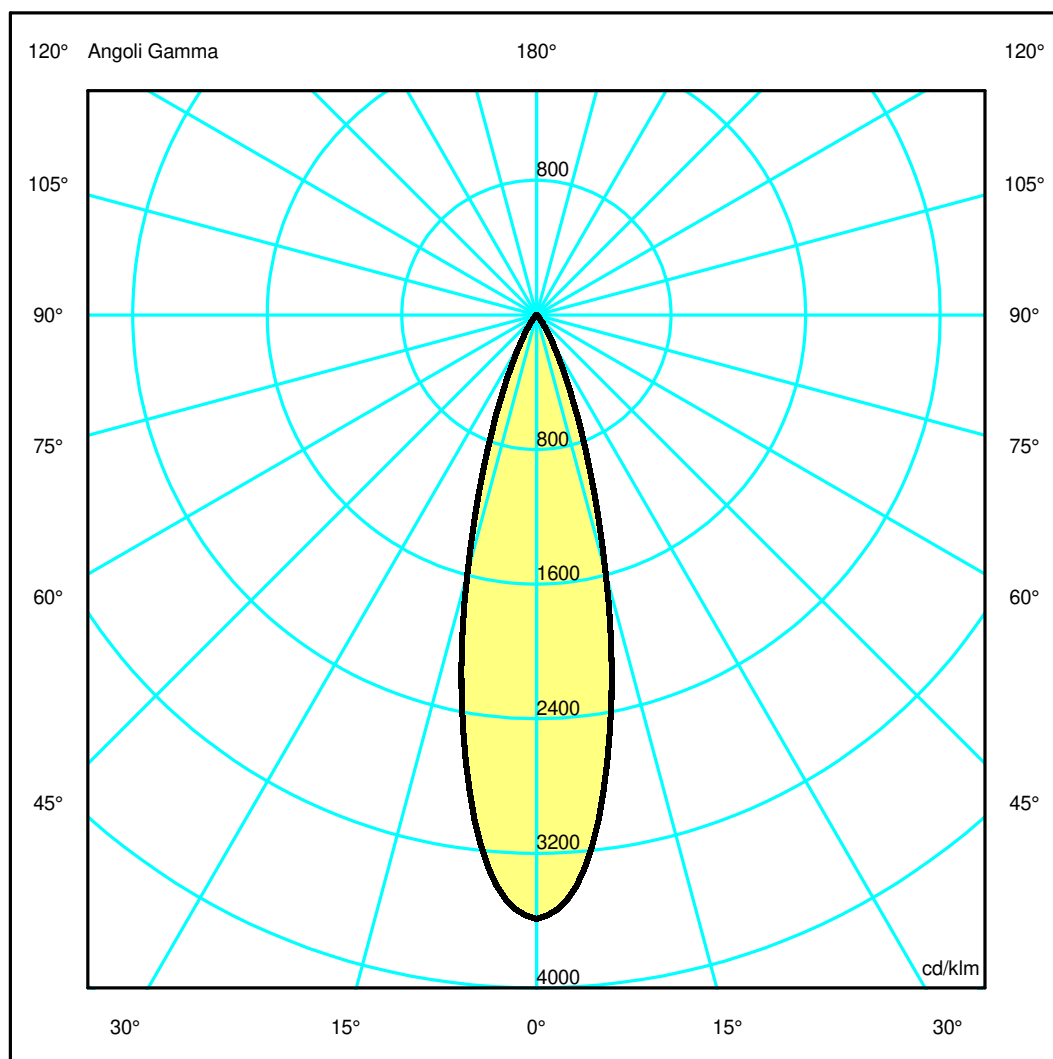

## Luminaire


Code KZ73204  
 Name kata metron pst spot1x40Dali 940 WF nro  
**Measur.**  
 Code FTS2400420.  
 Name kata metron pst spot1x40Dali 940 WF nro

Luminaire Flux	580 lm	Luminaire Power	11.0 W	Efficacy	52.727 lm/W	Efficiency	100.00%
Source Flux	580 lm	Maximum value	3590.26 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	40 mm 33 mm	Width Height	40 mm 0 mm	Height	103 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.000855 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000207 m2	
Coordinate system Date Measurement Distance		CG 21-06-2024 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 580 lm	
LED Flux=929lm LED Power=8W Eff=62% EfcLed=118lm/W EfcLum=53lm/W CCT=4000K Ra=90 R9=50 SDCM=2 L70(9k)=50000h							
C.I.E. F UTE	98 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.49	0.74	0.99	1.24	OC	0.25	0.49	0.74	0.99	1.24
OB	0.25	0.49	0.74	0.99	1.24	OD	0.25	0.49	0.74	0.99	1.24

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	2082.35	1911.66	922.66	239.80	49.05	10.86	2.78	0.48	0.00	0.00
OB	2082.35	1911.66	922.66	239.80	49.05	10.86	2.78	0.48	0.00	0.00
OC	2082.35	1911.66	922.66	239.80	49.05	10.86	2.78	0.48	0.00	0.00
OD	2082.35	1911.66	922.66	239.80	49.05	10.86	2.78	0.48	0.00	0.00

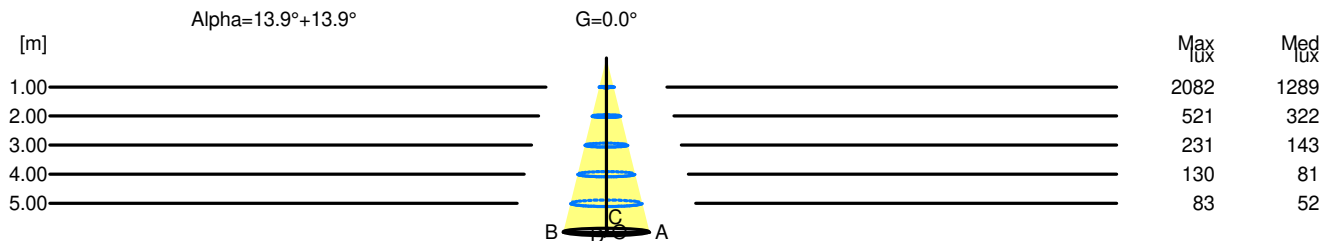

H[m]	D[m]	Max lux	Med lux	Alpha=13.9°+13.9°	G=0.0
1.00	0.49	2082	1289		
2.00	0.99	521	322		
3.00	1.48	231	143		
4.00	1.98	130	81		
5.00	2.47	83	52		