

Luminaire


Code T42004NW00
Name EFFETTO 4 FASCI STRETTI 18W 3000K grigio bianco

Measurerm.

Code FTS0000819
Name EFFETTO 4 FASCI STRETTI 18W 3000K grigio bianco

Efficiency	100.00%	Coordinate system	CG	Total Flux	45.68 lm	
Maximum value	7802.70 cd/klm	Position	C=270.00 G=14.00	Asymmetrical		
Rectangular Luminaire Rectangular Luminous Area	Length Length	140 mm 50 mm	Width Width	140 mm 50 mm	Height Height	140 mm 0 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.002500 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000605 m2		
Date Measurement Distance	17-12-2013 0.00		Maximum Gamma Angle Measurement Flux	180 45.68 lm		
Imax=7873 cd/klm - LED Flux=714 lm - LED Power=8.4 W - Eff=63 % - EfcLED=85 lm/W - EfcLum=25 lm/W Ra=80 Typ - SDCM=4 - Life=L70(14K)>81600 ore						
C.I.E.	46 49 43 50 100		D DIN 5040 B NBN	C31 BZ 5 / 1 / BZ 6 / 1.25 / BZ 7 / 1.5 / BZ 8 / 2 / BZ 9 / 2.5 / BZ		
F UTE	0.50 F + 0.50 T					


140mm x 140mm



Semipiani C

180.0 ——— 0.0
270.0 - - - - - 90.0

ULOR 50.00 %
DLOR 50.00 %
RN 50.00 %

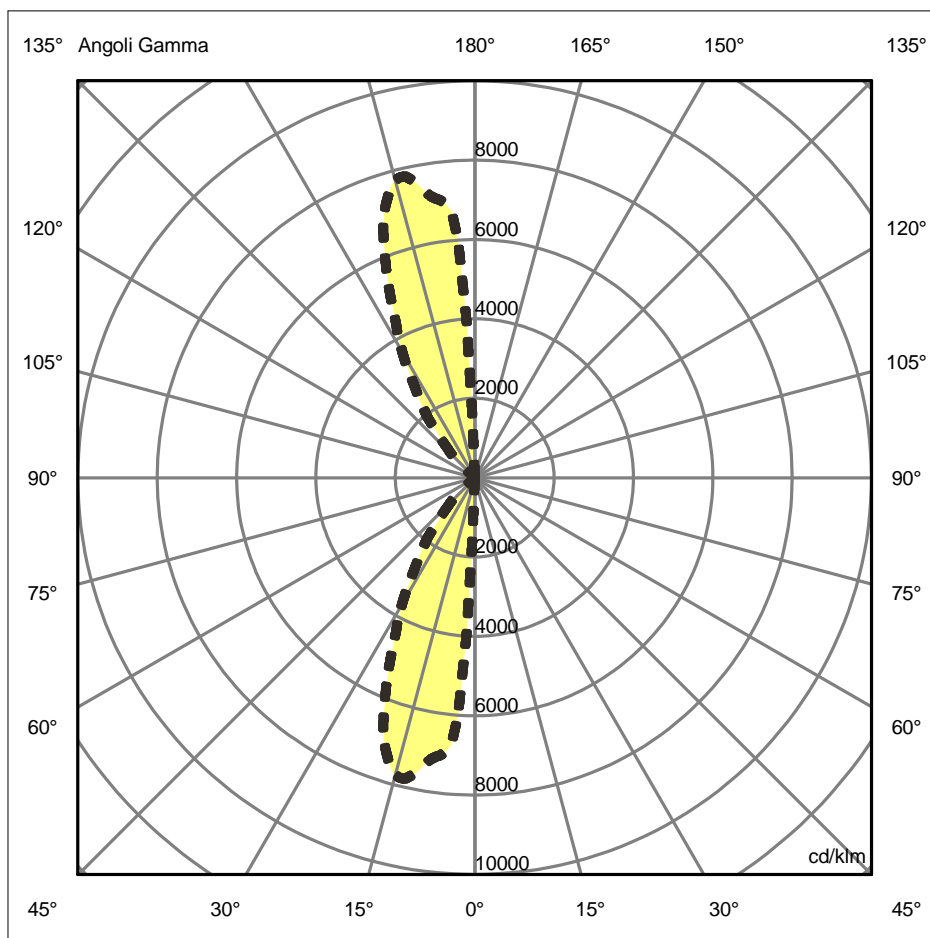

Luminaire

Code T42004NW00
 Name EFFETTO 4 FASCI STRETTI 18W 3000K grigio bianco

Measurem.

Code FTS0000819
 Name EFFETTO 4 FASCI STRETTI 18W 3000K grigio bianco

Efficiency	100.00%	Coordinate system	CG	Total Flux	45.68 lm	
Maximum value	7802.70 cd/klm	Position	C=270.00 G=14.00	Asymmetrical		
Rectangular Luminaire Rectangular Luminous Area	Length Length	140 mm 50 mm	Width Width	140 mm 50 mm	Height Height	140 mm 0 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.002500 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000605 m2	
Date Measurement Distance	17-12-2013 0.00		Maximum Gamma Angle Measurement Flux		180 45.68 lm	
Imax=7873 cd/klm - LED Flux=714 lm - LED Power=8.4 W - Eff=63 % - EfcLED=85 lm/W - EfcLum=25 lm/W Ra=80 Typ - SDCM=4 - Life=L70(14K)>81600 ore						
C.I.E. F UTE	46 49 43 50 100 0.50 F + 0.50 T		D DIN 5040 B NBN	C31 BZ 5 / 1 / BZ 6 / 1.25 / BZ 7 / 1.5 / BZ 8 / 2 / BZ 9 / 2.5 / BZ		

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90

Apertura a sinistra non trovata, gamma =-90