


Luminaire

Code 1611010A
Name DINARCO PARETE ALOGENO R7S BIANCO

Measurment.

Code FTS1601367
Name DINARCO PARETE ALOGENO R7S BIANCO

Luminaire Flux	1392.55 lm	Luminaire Power	147.81 W	Efficacy	9.42 lm/W	Efficiency	66.50%
Lamps Flux	2094.00 lm	Maximum value	375.72 cd/klm	Position	C=180.00 G=168.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	322 mm	Width	76 mm	Height	400 mm
Rectangular Luminous Area		Length	120 mm	Width	30 mm	Height	0 mm
Horizontal Luminous Area		0.003600 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000871 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		09-06-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2094.00 lm	
HDG-150-230-R7s							
C.I.E.	8 26 57 11 67			D DIN 5040		D13	
F UTE	--			B NBN		BZ 10	

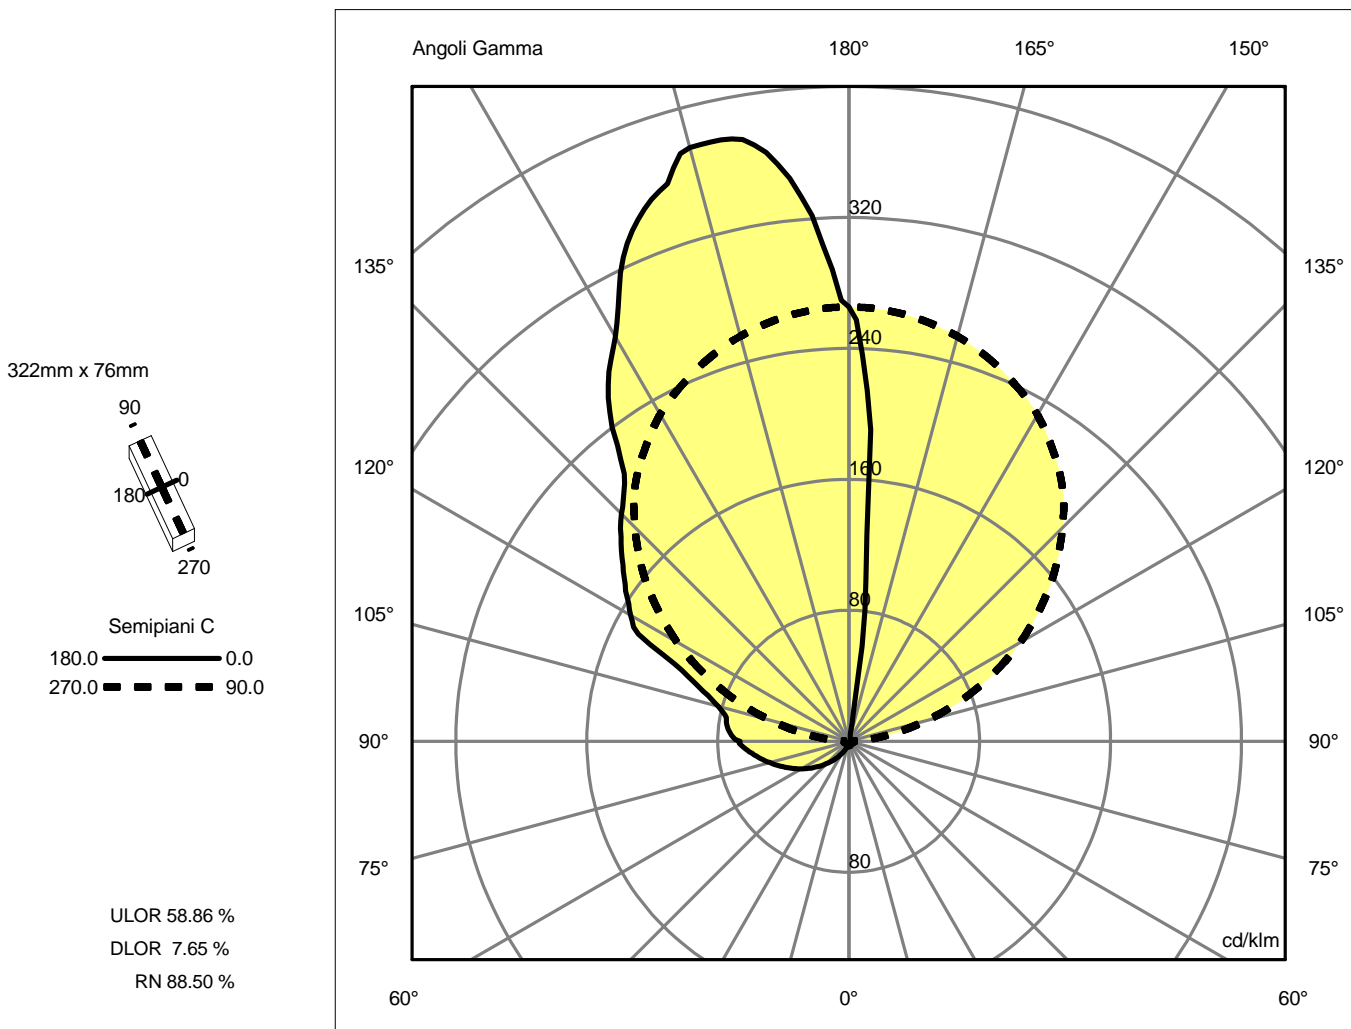

Luminaire

Code 1611010A
Name DINARCO PARETE ALOGENO R7S BIANCO

Measurerm.


Code FTS1601367
Name DINARCO PARETE ALOGENO R7S BIANCO

Luminaire Flux	1392.55 lm	Luminaire Power	147.81 W	Efficacy	9.42 lm/W	Efficiency	66.50%
Lamps Flux	2094.00 lm	Maximum value	375.72 cd/klm	Position	C=180.00 G=168.00	CG Sym. on planes 0-180	
Rectangular Luminaire		Length	322 mm	Width	76 mm	Height	400 mm
Rectangular Luminous Area		Length	120 mm	Width	30 mm	Height	0 mm
Horizontal Luminous Area		0.003600 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000871 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		09-06-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2094.00 lm	
HDG-150-230-R7s							
C.I.E.	8 26 57 11 67			D DIN 5040	D13		
F UTE	--			B NBN	BZ 10		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.28	0.57	0.85	1.13	1.42	OC	1.43	2.86	4.28	5.71	7.14
OB	0.89	1.78	2.67	3.56	4.46	OD	1.43	2.86	4.28	5.71	7.14

	Luminous Intensities [cd/klm]										
	0	5	15	25	35	45	55	65	75	85	
OA	555.56	265.52	6.68	4.19	3.76	3.78	3.79	3.82	3.86	3.96	
OB	555.56	699.42	786.28	683.07	536.34	411.27	349.27	261.85	172.85	154.07	
OC	555.56	553.38	536.24	503.57	455.17	386.80	300.70	203.80	104.42	22.91	
OD	555.56	553.38	536.24	503.57	455.17	386.80	300.70	203.80	104.42	22.91	

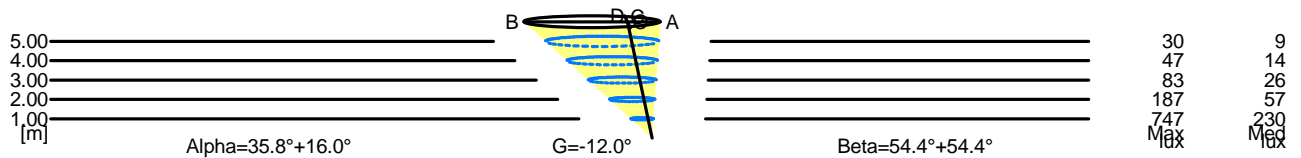

5.00	5.87	30	9	
4.00	4.70	47	14	
3.00	3.52	83	26	
2.00	2.35	187	57	
1.00	1.17	747	230	
H[m]	D[m]	Max lux	Med lux	Alpha=35.8°+16.0° G=-12.0

5.00	14.28	30	9	
4.00	11.42	47	14	
3.00	8.57	83	26	
2.00	5.71	187	57	
1.00	2.86	747	230	
H[m]	D[m]	Max lux	Med lux	Beta=54.4°+54.4° G=0.0