

## Luminaire

Code NL1732210K0  
 Name LineaLed Wallwasher 80 - SPOT - 3000K

## Measurement

Code FTS1601657-A  
 Name LineaLed Wallwasher 80 - SPOT - 3000K


Luminaire Flux	2364 lm	Luminaire Power	25.0 W	Efficacy	94.560 lm/W	Efficiency	100.00%
Source Flux	2364 lm	Maximum value	6074.25 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	780 mm	Width	43 mm	Height	62 mm
Rectangular Luminous Area		Length	750 mm	Width	23 mm	Height	0 mm
Horizontal Luminous Area		0.017250 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°	0.004173 m2		
Coordinate system		CG			Symmetry Type	Rotosymmetrical	
Date		23-02-2024			Maximum Gamma Angle	180	
Measurement Distance		0.00			Measurement Flux	2364 lm	

LED Flux=2682lm LED Power=25W Eff=88% EfcLed=107lm/W EfcLum=95lm/W CCT=3000K Ra=80 SDCM=3 L70(9k)=51400h

C.I.E. 0 0 0 0 100  
 F UTE 1.00 T

D DIN 5040 --  
 B NBN BZ 10

780mm x 43mm




Semipiani C

180.0 ——— 0.0

ULOR100.00 %

DLOR 0.00 %

RN100.00 %

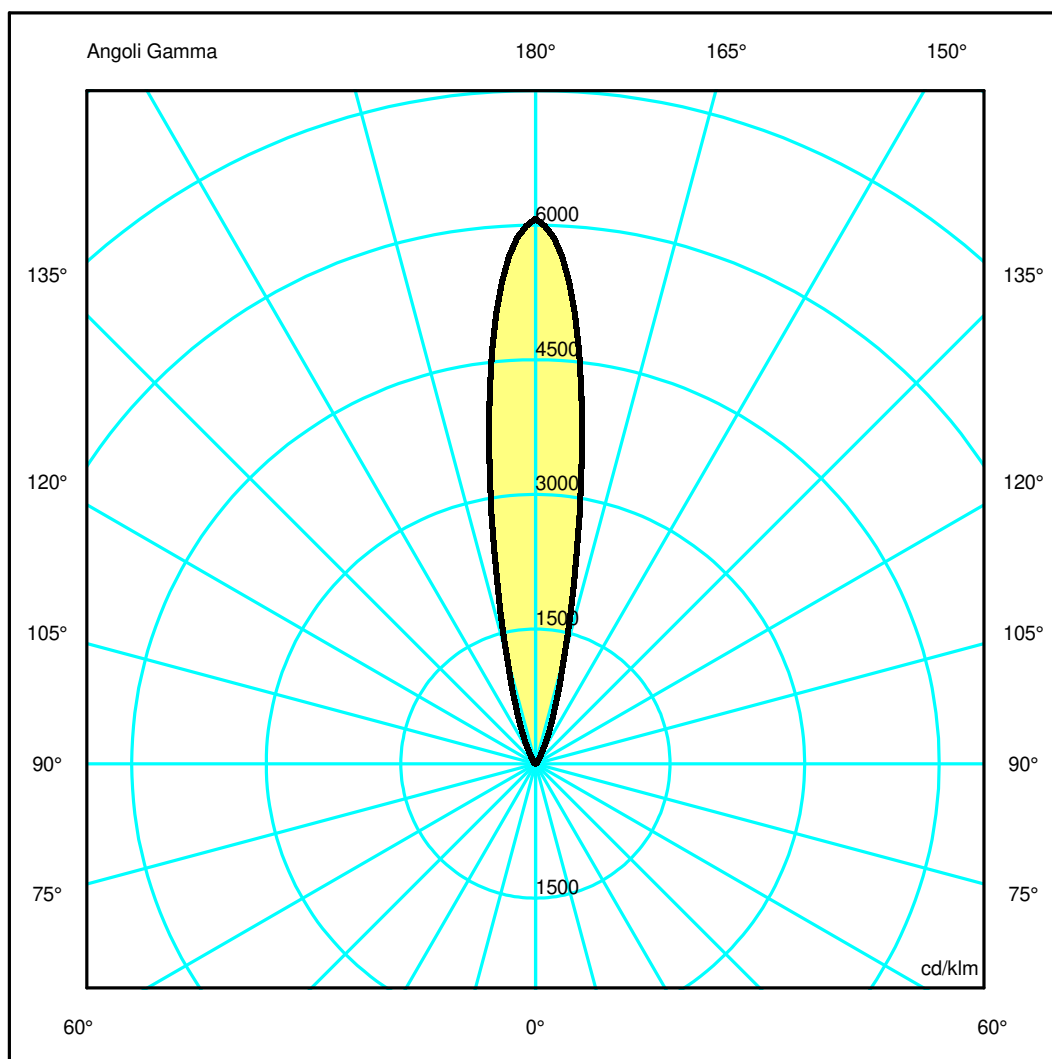

## Luminaire

Code NL1732210K0  
Name LineaLed Wallwasher 80 - SPOT - 3000K

## Measurerm.

Code FTS1601657-A  
Name LineaLed Wallwasher 80 - SPOT - 3000K

Luminaire Flux	2364 lm	Luminaire Power	25.0 W	Efficacy	94.560 lm/W	Efficiency	100.00%
Source Flux	2364 lm	Maximum value	6074.25 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	780 mm	Width	43 mm	Height	62 mm
Rectangular Luminous Area		Length	750 mm	Width	23 mm	Height	0 mm
Horizontal Luminous Area		0.017250 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.004173 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		23-02-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2364 lm	


LED Flux=2682lm LED Power=25W Eff=88% EfcLed=107lm/W EfcLum=95lm/W CCT=3000K Ra=80 SDCM=3 L70(9k)=51400h

C.I.E.	0 0 0 0 100	D DIN 5040	--
F UTE	1.00 T	B NBN	BZ 10

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.17	0.34	0.50	0.67	0.84	OC	0.17	0.34	0.50	0.67	0.84
OB	0.17	0.34	0.50	0.67	0.84	OD	0.17	0.34	0.50	0.67	0.84

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	14359.54	11898.24	2945.51	658.66	154.28	65.53	38.17	21.45	9.66	2.27
OB	14359.54	11898.24	2945.51	658.66	154.28	65.53	38.17	21.45	9.66	2.27
OC	14359.54	11898.24	2945.51	658.66	154.28	65.53	38.17	21.45	9.66	2.27
OD	14359.54	11898.24	2945.51	658.66	154.28	65.53	38.17	21.45	9.66	2.27

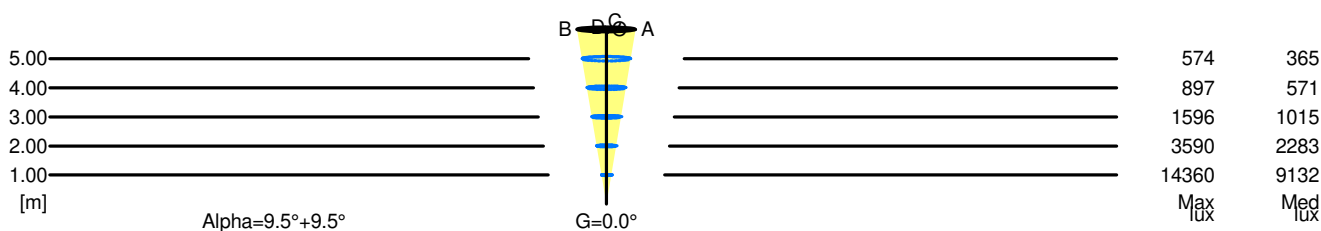

5.00	1.68	574	365	
4.00	1.34	897	571	
3.00	1.01	1596	1015	
2.00	0.67	3590	2283	
1.00	0.34	14360	9132	
H[m]	D[m]	Max lux	Med lux	Alpha=9.5°+9.5°      G=0.0