

Luminaire

Code NL1733225K0
 Name LineaLed Wallwasher adjustable 80 - FLOOD - 3000K

Measurerm.

Code FTS1601658-A
 Name LineaLed Wallwasher adjustable 80 - FLOOD - 3000K


Luminaire Flux	2143 lm	Luminaire Power	25.0 W	Efficacy	85.720 lm/W	Efficiency	100.00%
Source Flux	2143 lm	Maximum value	2656.54 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	780 mm	Width	43 mm	Height	62 mm
Rectangular Luminous Area		Length	750 mm	Width	23 mm	Height	0 mm
Horizontal Luminous Area		0.017250 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°	0.004173 m2		
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		23-02-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2143 lm	

LED Flux=2682lm LED Power=25W Eff=80% EfcLed=107lm/W EfcLum=86lm/W CCT=3000K Ra=80 SDCM=3 L70(9k)=51400h

C.I.E. 0 0 0 0 100
 F UTE 1.00 T

D DIN 5040 --
 B NBN BZ 10

780mm x 43mm




Semipiani C

180.0 ——— 0.0

ULOR100.00 %

DLOR 0.00 %

RN100.00 %

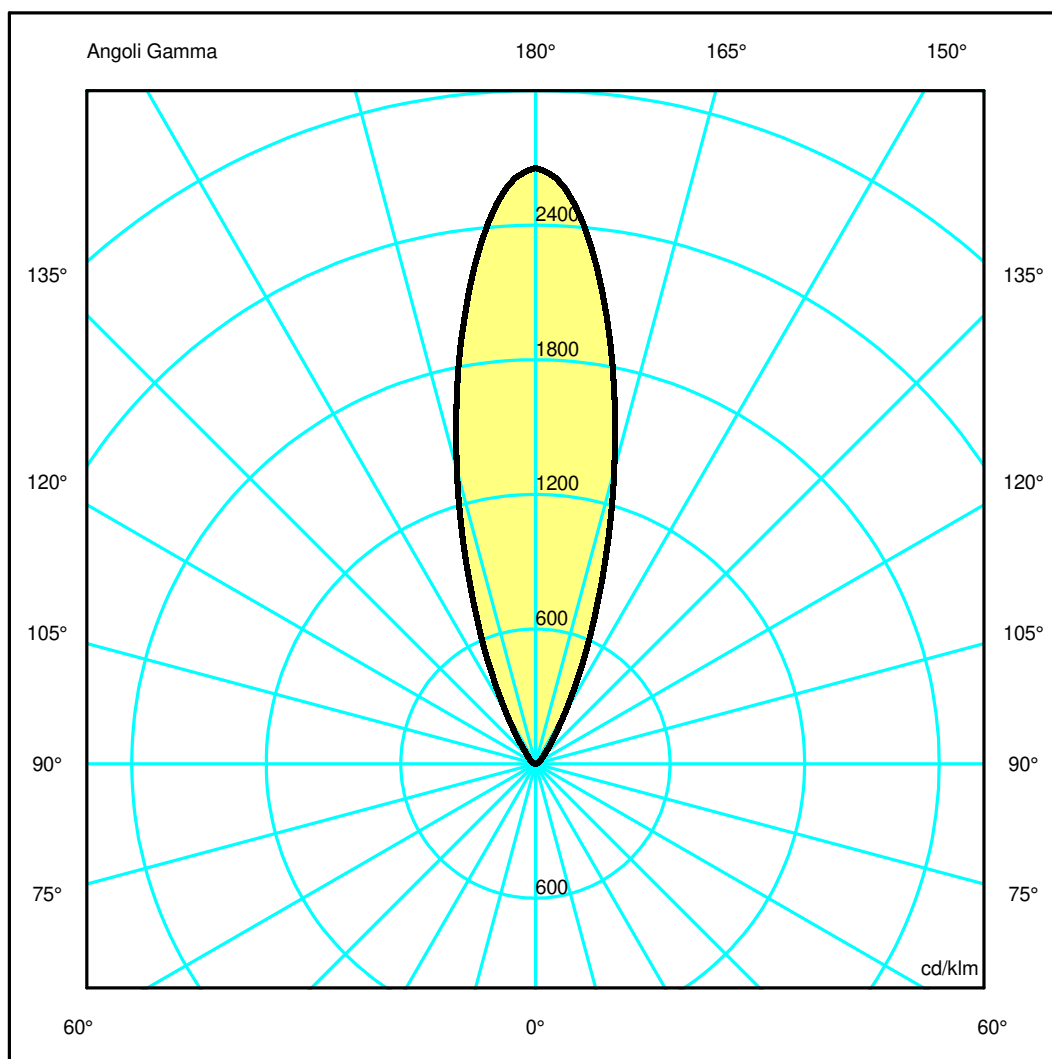

Luminaire

Code NL1733225K0
Name LineaLed Wallwasher adjustable 80 - FLOOD - 3000K

Measurement

Code FTS1601658-A
Name LineaLed Wallwasher adjustable 80 - FLOOD - 3000K

Luminaire Flux	2143 lm	Luminaire Power	25.0 W	Efficacy	85.720 lm/W	Efficiency	100.00%
Source Flux	2143 lm	Maximum value	2656.54 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	780 mm	Width	43 mm	Height	62 mm
Rectangular Luminous Area		Length	750 mm	Width	23 mm	Height	0 mm
Horizontal Luminous Area		0.017250 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.004173 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		23-02-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2143 lm	


LED Flux=2682lm LED Power=25W Eff=80% EfcLed=107lm/W EfcLum=86lm/W CCT=3000K Ra=80 SDCM=3 L70(9k)=51400h

C.I.E.	0 0 0 0 100	D DIN 5040	--
F UTE	1.00 T	B NBN	BZ 10

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.27	0.55	0.82	1.09	1.36	OC	0.27	0.55	0.82	1.09	1.36
OB	0.27	0.55	0.82	1.09	1.36	OD	0.27	0.55	0.82	1.09	1.36

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	5692.97	5185.80	2904.36	1069.16	297.84	109.50	58.83	33.27	15.18	3.34
OB	5692.97	5185.80	2904.36	1069.16	297.84	109.50	58.83	33.27	15.18	3.34
OC	5692.97	5185.80	2904.36	1069.16	297.84	109.50	58.83	33.27	15.18	3.34
OD	5692.97	5185.80	2904.36	1069.16	297.84	109.50	58.83	33.27	15.18	3.34

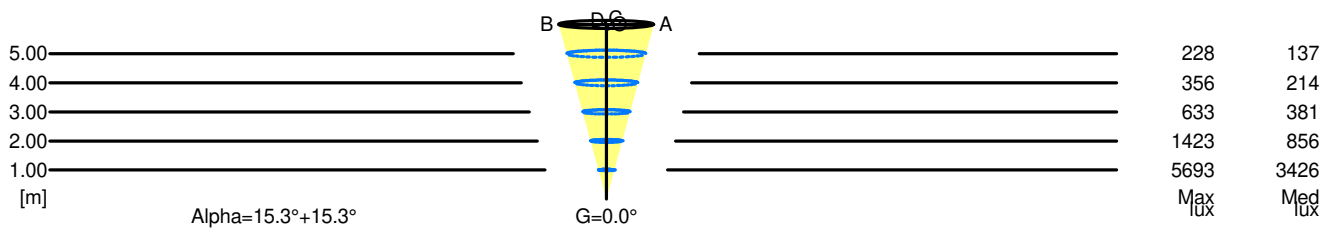

5.00	2.73	228	137	
4.00	2.18	356	214	
3.00	1.64	633	381	
2.00	1.09	1423	856	
1.00	0.55	5693	3426	
H[m]	D[m]	Max lux	Med lux	Alpha=15.3°+15.3° G=0.0