


## Luminaire

Code BB10300+DV1015  
 Name LUCERI Q TLESS ROUND.max 46W 930 COMFORT + Driver 50W ND

## Measurem.

Code FTS1801147  
 Name LUCERI Q TLESS ROUND.max 46W 930 COMFORT + Driver 50W ND

Luminaire Flux	3969.42 lm	Luminaire Power	54.00 W	Efficacy	73.51 lm/W	Efficiency	100.00%
Sources Flux	3969.42 lm	Maximum value	887.71 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	188 mm	Width	188 mm	Height	238 mm
Rectangular Luminous Area		Length	177 mm	Width	177 mm	Height	0 mm
Horizontal Luminous Area		0.031329 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007579 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3969.42 lm	
LED Flux=5451lm LED Power=50W Eff=73% EfcLed=109lm/W EfcLum=74lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	81 94 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

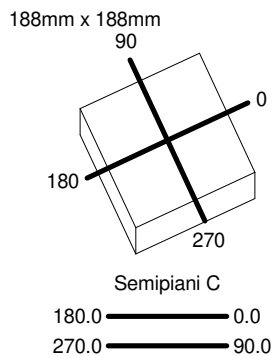

ULOR 0.01 %  
 DLOR 99.99 %  
 RN 0.01 %

