

Luminaire

Code 0645020A
Name LOGICO MICRO PLAFONE 3X120°

Measurerm.

Code FTS161223-A
Name LOGICO MICRO PLAFONE 3X120°


Luminaire Flux	1262 lm	Luminaire Power	15.0 W	Efficacy	84.133 lm/W	Efficiency	89.50%
Source Flux	1410 lm	Maximum value	136.62 cd/klm	Position	C=30.00 G=30.00	CG	Asymmetrical
Round Luminaire		Diam.	330 mm	Height	170 mm		
Round Luminous Area		Diam.	330 mm	Height	170 mm		
Horizontal Luminous Area			0.085530 m2	Emitting area on Plane 180°			0.056100 m2
Emitting area on Plane 0°			0.056100 m2	Emitting area on Plane 270°			0.056100 m2
Emitting area on Plane 90°			0.056100 m2	Glare area at 76°			0.075125 m2
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		20-01-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1410 lm	

Lamping=LED DIM 3x5W (E14) CCT=2700K CRI=80

C.I.E. 34 56 77 55 90
F UTE 0.49 H + 0.40 T

D DIN 5040
B NBN

C21
BZ 6 / 1.25 / BZ 7

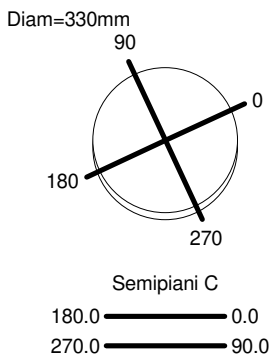

ULOR 40.03 %
DLOR 49.48 %
RN 44.72 %

