

## Luminaire


Code AF05405+AF95104  
 Name SHARP RECESSED TRIM 2X 6W 930 WIDE FLOOD SILVER EXT.DRV + SCREEN 2X BLACK

## Measurerm.

Code FTS1603231  
 Name SHARP RECESSED TRIM 2X 6W 930 WIDE FLOOD SILVER EXT.DRV + SCREEN 2X BLACK

Luminaire Flux	371.47 lm	Luminaire Power	5.50 W	Efficacy	67.54 lm/W	Efficiency	100.00%
Lamps Flux	371.47 lm	Maximum value	2630.91 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	74 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	72 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area	0.002664 m2	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.000644 m2
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°			
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle		Measurement Flux	
Date	16-02-2017	Measurement Flux					
Measurement Distance	0.00						
LED Flux=530.66lm LED Power=5.5W Eff=70% EfcLed=96lm/W EfcLum=68lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99 100 100 100 100	D DIN 5040		A60			
F UTE	--	B NBN		BZ 1			


74mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

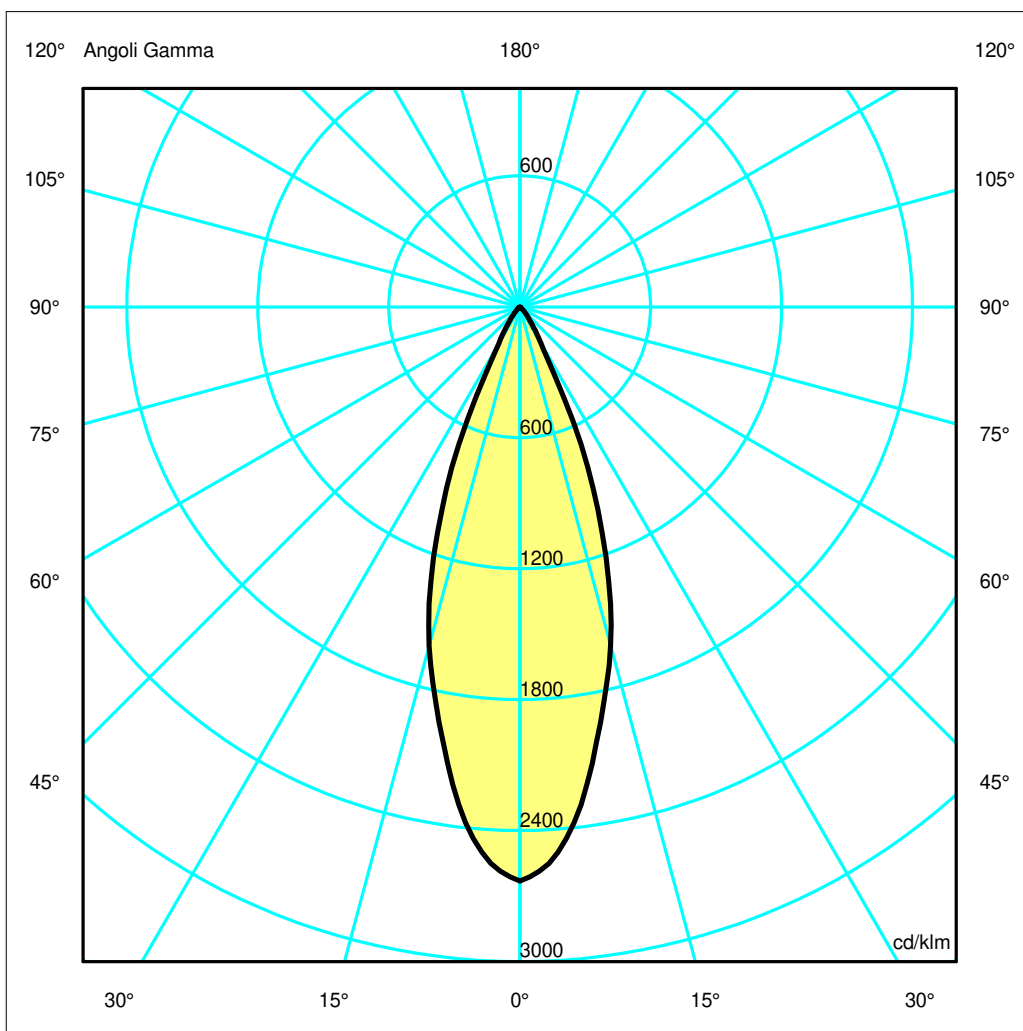

## Luminaire

Code AF05405+AF95104  
Name SHARP RECESSED TRIM 2X 6W 930 WIDE FLOOD SILVER EXT.DRV + SCREEN 2X BLACK

## Measurement

Code FTS1603231  
Name SHARP RECESSED TRIM 2X 6W 930 WIDE FLOOD SILVER EXT.DRV + SCREEN 2X BLACK


Luminaire Flux	371.47 lm	Luminaire Power	5.50 W	Efficacy	67.54 lm/W	Efficiency	100.00%
Lamps Flux	371.47 lm	Maximum value	2630.91 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	74 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	72 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area	0.002664 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.000644 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	16-02-2017			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	371.47 lm		
LED Flux=530.66lm LED Power=5.5W Eff=70% EfcLed=96lm/W EfcLum=68lm/W CCT=3000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.65	0.98	1.30	1.63	OC	0.33	0.65	0.98	1.30	1.63
OB	0.33	0.65	0.98	1.30	1.63	OD	0.33	0.65	0.98	1.30	1.63

### Luminous Intensities [ cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	977.30	907.87	596.98	212.82	36.18	7.29	0.86	0.12	0.00	0.00
OB	977.30	907.87	596.98	212.82	36.18	7.29	0.86	0.12	0.00	0.00
OC	977.30	907.87	596.98	212.82	36.18	7.29	0.86	0.12	0.00	0.00
OD	977.30	907.87	596.98	212.82	36.18	7.29	0.86	0.12	0.00	0.00

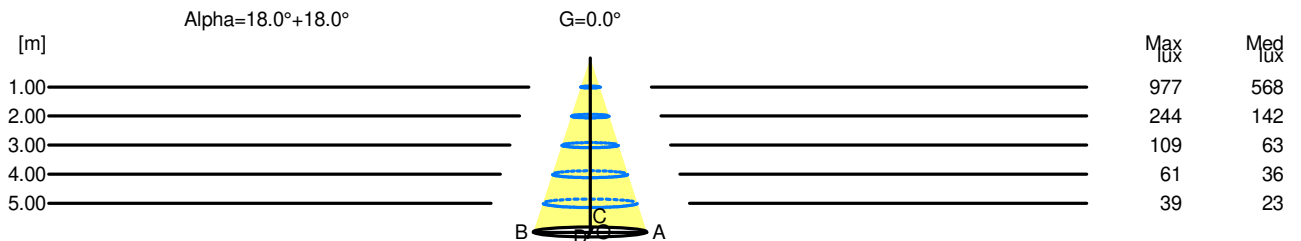

H[m]	D[m]	Max lux	Med lux	Alpha=18.0°+18.0°	G=0.0
1.00	0.65	977	568		
2.00	1.30	244	142		
3.00	1.95	109	63		
4.00	2.60	61	36		
5.00	3.25	39	23		